
506457-01 1/2013 Supersedes 8/2011

PRODIGY® APPLICATION GUIDE

Prodigy[®] Application Guide (Advanced Features)

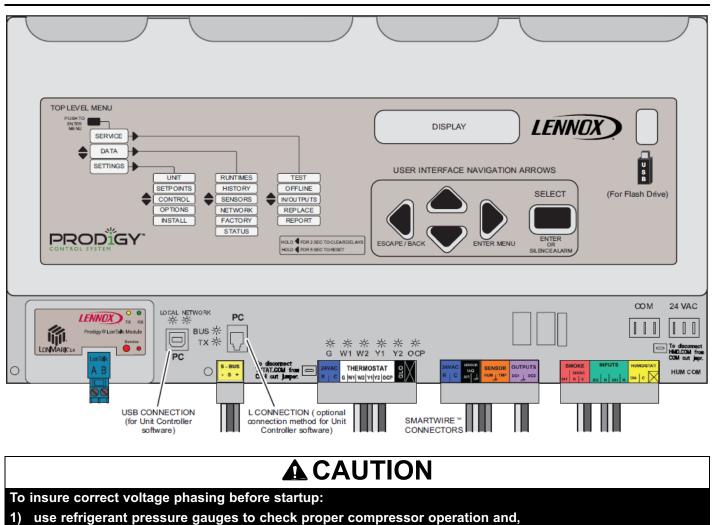

2) check arrow label for blower rotation.

Compressor damage will be the responsibility of the installer.





1.	Prodig		Page 6
	1.1.		Page 6
2.			Page 7
	2.1.		Page 7
		2.1.1. Cooling Stages I	Page 7
	~ ~		Page 7
	2.2.		Page 8
		2.2.1. Network Control Panel (NCP) I	Page 8
		2.2.2. Zone Sensor Back-Up Modes	Page 8
		2.2.3. L Connection Network Back-Up Set Points	Page 8
		2.2.4. Heating & Cooling Stages in Zone Sensor Mode	Page 8
		2.2.5. Off Delay in Zone Sensor Mode	Page 9
2			Page 9
J.	3.1.	omponent Operation Pa	age 12 age 12
	5.1.		age 12
		3.1.2. Compressor Off Delay (Single phase units only P	age 12
		3.1.3. Blower On Delay P	age 12
			age 12
		3.1.5. High Pressure Switches (S4, S7, S28, S96) P	age 12
	3.2.	Gas Units Burner Protection And Delays	age 12
	0.2.		age 12
		3.2.2. Roll-Out Switch (S47, S69) P	age 12
		3.2.3. Combustion Air Switch (S18, S45) P	age 12
		3.2.4. Gas Valve Sense	age 12
			age 12
	3.3.	Miscellaneous Components P	age 12
		3.3.1. Unoccupied Or Night Setback Mode P	age 12
		3.3.2. Local Thermostat Mode P	age 12
		3.3.3. Zone Sensor Mode P	age 13
		3.3.4. Gas and Electric Heat Warm-Up Mode (During occupied time period) P	age 13
		3.3.5. Heat Pump Warm-Up Mode	age 13
		3.3.6. Cool-Down Mode (During occupied time period) P	age 13
		3.3.7. Air Flow Switch (S52-Optional)	age 13
		3.3.8. Dirty Filter Switch (S27-Optional) P	age 13
	3.4.	Gas Heat Operation—Gas Units	age 13
	3.5.		age 13
		3.5.1. Electric Heat Operation	age 13
	<u> </u>	3.5.2. Primary or Secondary Limits	age 13
	3.6.	Heat Pump Operation	age 13
		3.6.1. Heat Operation P 3.6.2. Primary or Secondary Limits P	age 13
		3.6.2. Primary or Secondary Limits P 3.6.3. Defrost Cycle P	age 13 age 13
			age 14
		3.6.5. Test Supplemental Electric Heat Operation	age 14
		3.6.6. Thermostats With Emergency Heat Function	age 14
	3.7.		age 14
	5.7.		age 14
			age 14
			age 14
	3.8.		age 14
	3.9.		age 14
	3.10.	Return Air Temperature Limits P	age 14
			age 14
		3.10.2. Safety Switch Input (A42-Optional) P	age 15
4.	Sensor	rsP	age 15
	4.1.	Temperature Sensors - Provided With Unit P	age 15
	4.2.	Optional Zone Sensor P	age 15
	4.3.		age 15
	4.4.		age 16
	4.5.		age 16
	4.6.		age 16
	4.7.	Optional Enthalpy Sensor	age 16
E	4.8.	OAC Sensor P	age 16
5.		High Efficiency: A Box Ean Operation Pick	age 17
	5.1. 5.2.		age 17 age 17
	J.Z.		aye i <i>l</i>

6.		Operation	Page
	6.1.	General	Page
	6.2.	Supermarket Reheat Operation	Page
	6.3.	Humiditrol Reheat Operation	Page
	6.4.	Humiditrol Reheat Operation - Digital	Page
	6.5.	RH Measurement / Display	Page
-	6.6.	Outside Air For Dehumidification	Page
7.		nizer	Page
	7.1.		Page
	7.2.	Outdoor Air Suitable (OAS) LED	Page
	7.3.	DIP Switch Settings	Page
	7.4.	Free Cooling Discharge Air Set point	Page
	7.5.	Free Cooling Compressor Lockout Set point	Pağe
	7.6.	Outdoor Air Suitability	Page
	7.7.	Enthalpy Set point	Page
	7.8.	Damper Minimum Position Potentiometer	Page
	7.9.	Damper Maximum Position	Page
	7.10.	Motorized Outdoor Air Damper	Page
	7.11.	Economizer Checkout	Page
	7.12.	Demand Control Ventilation	Page
		7.12.1. General	Page
		7.12.2. Default Operation	Page
		7.12.3. ECTO Adjustments	Page
		7.12.3.1. Set point Control Option	Page
		7.12.3.2. Determine IAQ Input	Page
		7.12.4. Outdoor Air Control Sensor (OAC)	Page
		7.12.4.1. Field Wiring	Page
		7.12.4.2. Set Damper Minimum Position	Page
		7.12.4.3. Set Velocity Sensor Range	Page
		7.12.4.4. Set Velocity Set point	Page
8.		Exhaust Operation	Page
	8.1.	Single Fan or Blower	Page
	8.2.	Two Fans or Blowers	Page
	8.3.	Exhaust Blower VFD	Page
9.	Supply	Air Delivery	Page
	9.1.	System Mode	Page
		9.1.1. Gas / Electric Units:	Page
		9.1.2. Electric / Electric Units:	Page
		9.1.3. Cooling Operation:	Page
		9.1.4. Heat Pump Operation:	Page
	9.2.	Supply VAV Control Mode	Page
		9.2.1. Local Thermostat Mode, Single Zone CAV Units	Page
		9.2.2. Zone Sensor mode, Single Zone CAV Units	Page
		9.2.3. Local Thermostat Mode, CAV Bypass Zoning Units	Pağe
		9.2.4. L Connection Network, CAV Bypass Zoning Units	Page
		9.2.5. Local Thermostat Mode, VAV units	Page
		9.2.6. Local Thermostat Mode, VAV staged units	Page
		9.2.7. L Connection Network, VAV units	Page
		9.2.8. VAV Staged Units: A Box	Page
		9.2.9. VAV Staged Units: B, C, D, and E Boxes	Page
	9.3.	VFD Control	Pağe
	9.4.	Supply Bypass Damper Control	Page
	9.5.	Analog Output Control	Page
		9.5.1. Manual Reset (ManRS)	Page
		9.5.2. Proportional Constant (P)	Pağe
		9.5.3. Integral Constant (I)	Page
		9.5.4. Derivative Constant (D)	Pağe
		9.5.5. Tuning	Pağe
10.	Discha	rge Air Control	Page
	10.1.		Page
	10.2.	Outdoor Air Reset	Page
	10.3.	Return Air Reset	Page
	10.4.	Discharge Air Cooling Total Reset Limit	Page
	10.5.	Heating	Page
	10.6.	Outdoor Air Reset	Page
	10.7.	Return Air Reset	Page
	10.8.	Discharge Air Control Heating Total Reset Limit	Page
11.		arty Zoning	Page
	11.1.	Air Delivery Operation	Page
	11.2.	Occupied /Unoccupied Operation	Page
			- 5-

	11.3.		on	Page 48
	11.4. 11.5.	DACC Outdoor	Air Reset	Page 49
	11.5.	Heating Operati	vir Reset	Page 49 Page 49
	11.7.		Air Reset	Page 49
	11.8.		vir Reset	Page 49
	11.9.	Power Exhaust	Operation	Page 49
	11.10.		Analog Outputs	Page 49
		11.10.1. VFD C	Control	Page 49
		11.10.2. Supply	y Bypass Damper Control	Page 49
	11.11.		odule	Page 54
12.	BACne		A. J. J.	Page 55
	12.1. 12.2.		lodule	Page 55
	12.2.		ons	Page 55 Page 55
	12.3.	Analog Output (Dbjects	Page 56
	12.5.	Analog Value O	bjects	Page 56
	12.6.	Analog Input Ob	ojects	Page 56
13.	Modula	iting Gas Valve	(MGV)	Page 58
	13.1.	Operation	······	Page 58
	13.2.	Testing		Page 58
	13.3.			Page 58
14. 15	Load S	nedding Option	ns	Page 59
15.	15.1.	Service Relay (Operation	Page 60 Page 60
	15.2.	OAT Operation		Page 61
16.		stics		Page 62
	16.1.	M2 Event Code	s	Page 62
17.	Electro	nic Configure 1	To Order (ECTO) Control Parameters	Page 66
	17.1.	M2 (A55) Push-	button And Display	Page 66
	17.2.	Reset To Factor	ry ECTO Parameters	Page 66
40	17.3.	Unit Controller F	PC Software	Page 66
18. 10	Networ	King The Contr	ollers	Page 89
19.	Sequer 19.1.	Unit Controller (n Control Modes	Page 90 Page 90
	19.1.	1911 Unit C	ontroller In Zone Sensor Mode	Page 90
			controller In Thermostat Mode	Page 90
			tions Common to All Rooftop Units	Page 91
		19.1.3.1.	Heating Operation (Modulating Gas)	Page 91
		19.1.3.2.	Occupied Demand	Page 92
		19.1.3.3.		Page 92
		19.1.3.4.		Page 92
		19.1.3.5. 19.1.3.6.		Page 92 Page 92
		19.1.3.7.		Page 92 Page 92
		19.1.3.8.	Building Pressure Control for Standard or High Static Power Exhaust Fans	Page 92
		19.1.3.9.		Page 93
		19.1.3.10		Page 93
		19.1.3.11		U
			with Variable Frequency Drives	Page 93
		19.1.4. Consta	ant Air Volume (CAV) Units in Single Zone Applications with a	D 00
			x Zone Sensor (4 Heat / 4 Cool)	Page 93
		19.1.4.1. 19.1.4.2.		Page 93 Page 93
		19.1.4.3.		Page 93 Page 93
		19.1.4.4.		Page 94
		19.1.4.5.		Page 94
		19.1.4.6.		Page 94
		19.1.4.7.		Page 94
		19.1.4.8.		Page 94
		19.1.4.9.		Page 94
			ant Air Volume (CAV) Units in Single Zone Applications with a	Dege 05
		19.1.5.1.	nostat or Third Party Unit Controller (2 Heat / 2 Cool)	Page 95
		19.1.5.1.		Page 95 Page 95
		19.1.5.3.		Page 95
		19.1.5.4.		Page 95
		19.1.5.5.	Heating Demand (General Operation)	Page 95
		19.1.5.6.	Heating Demand (Electric)	Page 95
		19.1.5.7.		Page 95

19.1.5.8.	Humiditrol Dehumidification Operation - Cooling Demand Only	Page 96
19.1.5.9.	Humiditrol Dehumidification Operation - Cooling and Dehum. Demands	Page 96
	Air Volume (CAV) Units in Single Zone Applications with a Thermostat	U
or 3rd Par	ty Unit Controller & Unit Operating in Discharge Air Temperature Control	
	Cool)	Page 96
19.`1.6.1.	Unit Controller Operation	Page 96
	Ventilation Demand	Page 96
19.1.6.3.	Cooling Demand	Page 96
19.1.6.4.	Cooling Demand With Economizer	Page 96
19.1.6.5.	Heating Demand (General Operation)	Page 97
19.1.6.6.	Heating Operation (Electric)	Page 97
19.1.7. Constant A	Air Volume (CAV) Units in Single Zone Applications with a Thermostat	0
or 3rd Part	y Unit Controller (2 Heat / 2 Cool)	Page 97
19.1.7.1.	Unit Controller Operation	Page 97
19.1.7.2.	Unit Sequence Of Operation	Page 97
19.1.7.3.	Supply Duct Bypass Damper	Page 97
19.1.8. Constant A	Air Volume Units in Bypass (CAVB) Zoning Applications with a	0
3rd Party I	Jnit Controller and the Unit Operating in Discharge Air Temperature	
Control (4	Heat / 4 Cool)	Page 97
19.1.8.1.	Unit Controller Operation	Page 97
	Unit Sequence of Operation	Page 98
19.1.8.3.	Supply Duct Bypass Damper	Page 98
19.1.9. Variable Ai	ir Volume (VAV) Units in Zoning Applications with a 3rd Party	U U
Unit Contro	oller and the Unit Operating in Discharge Air Temperature Control	
(4 Heat / 4	Cool)	Page 98
19.1.9.1.	Unit Controller Operation	Page 98
19.1.9.2.	Ventilation Demand	Page 98
19.1.9.3.	Cooling Demand	Page 98
19.1.9.4.	Cooling Demand With Economizer	Page 99
19.1.9.5.	Heating demand (general operation)	Page 99
19.1.9.6.	Heating Operation (Electric)	Page 99
19.1.9.7.	Morning Warm Up	Page 99
19.1.9.8.	Outdoor Air CFM Control	Page 99
20. M2 Unit Controller Inputs	and Outputs	Page 100
	·	Page 105
Abbreviations		Page 106

1. Prodigy M2 Unit Controller Description

The M2 Unit Controller provides all rooftop unit control functions to insure its safe and reliable operation. It also provides status and diagnostic information to facilitate troubleshooting. The controller's programmable parameters allow adjustment of time delays and set points that enable advanced features.

The default configuration requires a standard room thermostat or direct digital controller (DDC). By changing a single parameter, the M2 can also control the unit from a zone sensor. The M2 Unit Controller can also be configured as a network controller when daisy-chained to the L Connection® Network. To simplify configuration, the M2 may be connected to a PC which has been loaded with Unit Controller software.

1.1. Add-on boards

Add-on boards connect to the main board to build variations according to application or equipment type.

Packaged Unit		A55	A59	A169	A133 VAV	A133 MGV	A133 GP
Models	Box Size	M2 Unit Controller	C2, #3 & 4 Com- pressor Board	MCB1 Motor Control Board	GP1 Variably Air Volume Board	GP1 Modulating Gas Valve Board	GP1 General Pur- pose I/O Board
LCH/LGH 036-060 S	Α	Х		Х	O*		0
LCH/LGH 036-060 H	Α	Х		Х			0
LCH/LGH 072 H	A+	Х			O*		0
LCH/LGH 092-150 H/S	В	Х			O*		0
LCH/LGH 156 H	С	Х	Х		O*		0
LCH/LGH 180 H	С	Х	Х		O*		0
LCH/LGH 210 H	С	Х	Х		O*		0
LCH/LGH 240/300 S	С	Х	Х		O*		0
LCH/LGH 420-600 H/S	Е	Х	Х		0	0	0
	1	X = requii	red; O = optional: * o	nly CAV Bypass su	pported, no VFD driv	/es.	1

Figure 1 shows the M2 integrated modular controller components and the location of the add-on boards.

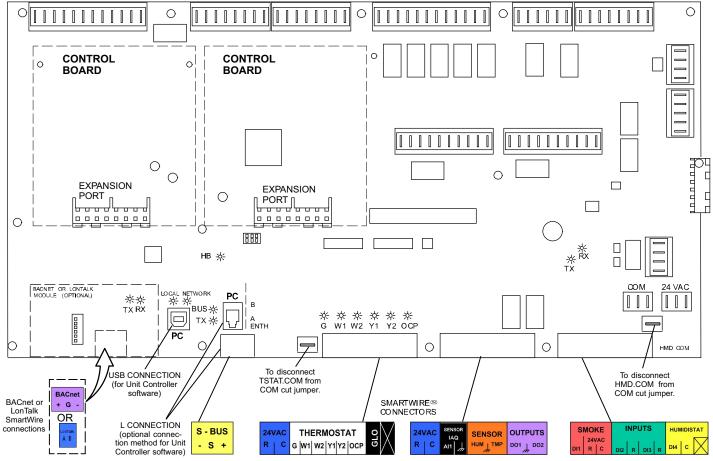


Figure 1. M2 Unit Controller and Expansion Board Locations

2. Main Controller Operation

2.1. System Mode - Thermostat

The M2 will operate the unit from a thermostat, zone sensor, or the zoning system based on the System Mode selected in ECTO 6.01. The default System Mode (option 0) is the thermostat mode.

DDC applications use thermostat mode for two or three-stage cooling and two-stage heating.

Units are shipped from the factory in system mode 0, Thermostat Mode. The M2 will operate two stages of heating and cooling based on the thermostat Y1, Y2, W1, W2, G, and OCP (occupied) demands.

2.1.1. Cooling Stages

The M2 allows three different staging options; adjust ECTO 5.04 to select the option.

- **Option 1. Two Cooling Stages:** Y2 demand brings on all mechanical stages of cooling during economizer operation.
- Option 2. (Default) Two Cooling Stages: Cooling operation is shown in table 1. Y2 demand brings 1/2 or 2/3 mechanical stages of cooling during economizer operation.
- **Option 3. Three Cooling Stages:** Cooling operation is shown in table 2; this option requires the use of a three-stage cool thermostat and a K27 relay. See wiring pictorial in figure 2 and wiring diagram control C section.




Figure 2. 3-stage cool (ECTO 5.04 opt. 3) wiring

2.1.2. Heating Stages

The M2 default thermostat operation is for two heating stages. See table 3 for gas heat units, table 4 for electric heat units, and table 5 for heat pump units.

Number of	N	o Economizer	With Economizer		
Compressors	Y1 Demand	Y2 Demand Adds	Y1 Demand	Y2 Demand Adds	
1	CP1	CP1	Free Cool	CP1	
2	CP1	CP2	Free Cool	CP1 ⁽¹⁾	
3	CP1 + CP2	CP3	Free Cool	CP1 + CP2 ⁽¹⁾	
4	CP1 + CP2	CP3 + CP4	Free Cool	CP1 + CP2 ⁽¹⁾	
•		Compressor 3, CP4 = Compresso			
•		anical cooling. *Assumes outdoor			

Table 1. Thermostat Mode Operation Default (Two Cooling Stages ECTO 5.04 Option 2)

Table 2. Thermostat Mode Operation (Three Cooling Stages ECTO 5.04 Option 3)

Number of		No Economize	r	With Economizer			
Compressors	Y1 Demand	Y2 Demand Adds	Y3 Demand Adds	Y1 Demand	Y2 Demand Adds	Y3 Demand Adds	
1	CP1	CP1	CP1	Free Cool	CP1	CP1	
2	CP1	CP2	CP2	Free Cool	CP1	CP2	
3	CP1	CP2	CP3	Free Cool	CP1	CP2	
4 CP1 + CP2 CP3 CP4 Free Cool CP1 + CP2 CP3							
CP1 = Compressor 1, CP2 = Compressor 2, CP3 = Compressor 3, CP4 = Compressor 4. *Assumes outdoor air is suitable for cooling.							

Table 3. Default Thermostat Mode Operation (Gas Heat)

No. of Heat Sections	Gas Valve	W1 Demand	W2 Demand
1	(1) 1 Stage	Gas Valve 1	Gas Valve 1
1	(1) 2 Stage	Low Rate	High Rate
2	(2) 1 Stage	High Rate - Both Valves	High Rate - Both Valves
2	(2) 2 Stage	Low Rate - Both Valves	High Rate - Both Valves

Table 4. Default Thermostat Mode Operation (Electric Heat)

No. of Heat Sections	Stages Per Section	W1 Demand	W2 Demand
1	1	Stage 1	Stage 1
1	2	Stage 1	Stage 2
2	1	High Rate - Both Sections	High Rate - Both Sections
2	2	Low Rate - Both Sections	High Rate - Both Sections

Table 5. Thermostat Mode Operation (Heat Pump Heat)

Unit Type	W1 Demand	W2 Demand Adds
1 Compressor / 1 Stage Electric Heat	CP1 Heating	Electric Heat
2 Compressors / 1 Stage Electric Heat	CP1 + CP2 Heating	Electric Heat

2.2. System Mode - Zone Sensor

ECTO 6.01 option 1, 2, or 3 allows the M2 Unit Controller to use internal set points and input from a zone sensor to operate the unit. An additional thermostat or Energy Management System is not required.

Internal set points can be adjusted using the Select button and Arrows on the M2 Unit Controller. Refer to the Electronic Configure To Order (ECTO) section in this manual. In zone sensor mode, during the occupied time period, the default M2 internal heating and cooling set points are:

Cooling set point: 74°F (ECTO 6.04)

Heating set point: 70°F (ECTO 6.02)

Use ECTO stage differential and dead-band options to adjust set points in zone sensor mode.

2.2.1. Network Control Panel (NCP)

The set points can also be adjusted using the optional NCP Network Control Panel. When an NCP is installed, the set points are determined by the NCP schedule. The NCP communicates with the M2 via the L Connection network bus. Internal M2 set points are used only if network communication is interrupted.

The zone sensor is wired directly to each unit P298-6 and P298 -7 (marked GND and TMP on the Field Wiring Termination Plugs). The zone sensor wiring diagram key number is A2.

2.2.2. Zone Sensor Back-Up Modes

Select the appropriate ECTO 6.01 option to determine the zone sensor back-up mode. The back-up mode is used in the event that the A2 room sensor fails or is disconnected.

- Option 1-M2 Zone Sensor System Mode 1 has no back-up mode of control should the A2 zone sensor fail.
- Option 2-M2 Zone Sensor System Mode 2 will default to a local thermostat if one is installed (should the A2 zone sensor fail). The M2 will switch over and operate based on the signals from the room thermostat.
- Option 3-M2 Zone Sensor System Mode 3 will default to return air sensor RT16 (should the A2 zone sensor fail). The M2 will switch over and operate based on the temperature from the return air sensor. RT16 is standard on all units; therefore M2 Zone Sensor System Mode 3 is the recommended System Mode when units are setup in the zone sensor mode.

NOTE - The RT16 has a lower resolution than the A2 zone sensor and should only be used as back-up.

2.2.3. L Connection Network Back-Up Set points

ECTO 6.02 through 6.05 back-up set points are used when the communication link has been lost on the L Connection system bus. Five minutes after communication is interrupted, the M2 will reset and start using the back-up set points. The M2 will default to occupied (6.02 & 6.04) back-up set points when the factory-installed jumper between P297-1 and P297-8 (marked "R" and "OCP" on the P297 label) is left in place.



It is recommended that occupied back-up set points be used. If the unoccupied (6.03 & 6.05) back-up set points are desired, remove the factory-installed jumper between P297-1 and P297-8.

During normal zone sensor operation with an NCP, the occupied demands are sent over the network and the occupied input on P297-8 is ignored. The occupied input on P297-8 is only read if the network communication link is lost.

2.2.4. Heating & Cooling Stages in Zone Sensor Mode

In Zone Sensor Mode, default operation, the M2 controls up to 4 stages of heating and 4 stages of cooling. See figure 3 and ECTO parameters in table 6.

The number of stages achieved depends on the type of equipment and whether or not an economizer is used. On units with economizers, free cooling becomes stage 1 and all compressor stages shift up one stage. On units with 4 compressors and an economizer, compressors 3 and 4 are controlled together for stage 4. See figure 3 and the ECTO parameters in table 6.

2.2.5. Off Delay in Zone Sensor Mode

In Zone Sensor Mode, the M2 initiates a 2-minute off delay on any power-up or reset. During the 2-minute delay, no blower, heating, or cooling operation will occur. This delay may be adjusted to stagger the start of each unit, reducing the initial power demand. (ECTO 5.25).

2.2.6. Blower Operation in Zone Sensor Mode

In Zone Sensor Mode, default operation, the M2 cycles the blower with a heat/cool demand. ECTO 6.17 can be changed to allow continuous blower operation.

1.19 S 1.20 S 1.21 S La 1.22 S	Name Sup_HT_1_Diff Sup_HT_2_Diff Sup_HT_1atch_Option Sup_HT_2atch_Option Sup_HT_1_ Sup_HT_1_ Sup_HT_1_ Sup_HT_1_ Sup_HT_1_ Sup_HT_1_	Min. 0 0 0 0 0 0 0 0 0 0 0	Default 8 2 12 3 0 0	Max 15 3.75 15 3.75 1	Counts W:DegF Counts W:DegF	Description Pump Heating Supplemental heat stage 1 differential. Used in zone sensor applications. Note: Differential temperature must be = to or < ECTO 1.19. Supplemental heat stage 2 differential. Used in zone sensor applications. Note: Differential temperature must be = to or > ECTO 1.18	
1.19 S 1.20 S 1.21 S La 1.22 S	Sup_HT_2_ Diff Sup_HT_1_ _atch_Option Sup_HT_2_ _atch_Option Sup_HT_1_	0 0 0	2 12 3 0	3.75 15 3.75	Counts W:DegF Counts W:DegF	Supplemental heat stage 1 differential. Used in zone sensor applications. Note: Differential temperature must be = to or < ECTO 1.19. Supplemental heat stage 2 differential. Used in zone sensor applications.	
1.19 S 1.20 S 1.21 S La 1.22 S	Sup_HT_2_ Diff Sup_HT_1_ _atch_Option Sup_HT_2_ _atch_Option Sup_HT_1_	0 0 0	2 12 3 0	3.75 15 3.75	W:DegF Counts W:DegF	Note: Differential temperature must be = to or < ECTO 1.19. Supplemental heat stage 2 differential. Used in zone sensor applications.	
1.20 S 1.21 S 1.22 S	Sup_HT_1_ _atch_Option Sup_HT_2_ _atch_Option Sup_HT_1_	0	3 0	3.75	W:DegF		
1.20 La 1.21 S 1.22 S	_atch_Option Sup_HT_2_ _atch_Option Sup_HT_1_	-		1	Outin		
^{1.21} La	_atch_Option Sup_HT_1_	0	0		Option	Supplemental heat stage 1 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled	
				1	Option	Supplemental heat stage 2 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled	
	Sigop_niner	0 0	0 0	225 3600	Counts F:Sec	Supplemental heat stage 1 stage-up timer. The maximum time that stage 1 runs before calling supplemental heat stage 1. Used in zone sensor applications. Disabled if set to 0.	
	Sup_HT_2_ StgUp_Timer	0 0	0 0	225 3600	Counts F:Sec.	Supplemental heat stage 2 stage-up timer. The maximum time that supplemental heat 1 runs before calling supplemental heat stage 2. Used in zone sensor applications. Disabled if set to 0.	
1.24 S	StgDn_Timer	0 0	19 304	225 3600	Counts F:Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.	
					E	lectric Heat	
2.06 S	Stg_Latch_Option	0	0	1	Option	Stage latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled	
2.07 S	StgUp_Timer	0 0	57 912	225 3600	Counts F:Sec	Stage up timer. The maximum time that lower stage runs before calling next heat stage. Used in zone sensor applications. Disabled if set to 0.	
2.08 S	StgDn_Timer	0 0	0 0	225 3600	Counts F: Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.	
						Gas Heat	
	Stg_Latch_ Option	0	0	1	Option	Stage latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled	
3.11 S	StgUp_Timer	0 0	57 912	225 3600	Counts F: Sec	Stage-up timer. The maximum time that lower stage runs before calling next heat stage. Used in zone sensor applications. Disabled if set to 0.	
3.12 S	StgDn_Timer	0 0	0 0	225 3600	Counts F: Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.	
						Cooling	
4.17 S	Stg_2_Latch	0	0	1	Option	Stage 2 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled	
4.18 S	Stg_3_Latch	0	0	1	Option	Stage 3 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled	
4.19 S	Stg_4_Latch	0	0	1	Option	Stage 4 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled	
	Stg_2_StgUp_ Timer	0 0	57 912	225 3600	Counts F:Sec	Stage 2 stage up timer. The maximum time that cooling stage 1 runs before calling cooling stage 2. Used in zone sensor applications. Disabled if set to 0.	

 Table 6. Zone Sensor ECTO Summary

table continued on next page

Control Parameter		Control Value					
No.	Name	Min.	Default	Max	Units	Description	
4.21	Stg_3_StgUp_ Timer	0 0	57 912	225 3600	Counts F:Sec	Stage 3 stage up timer. The maximum time that cooling stage 2 runs before calling cooling stage 3. Used in zone sensor applications. Disabled if set to 0.	
4.22	Stg_4_StgUp_ Timer	0 0	57 912	225 3600	Counts F:Sec	Stage 4 stage up timer. The maximum time that cooling stage 3 runs before call- ing cooling stage 4. Used in zone sensor applications. Disabled if set to 0.	
4.23	StgDn_Timer	0 0	57 912	225 3600	Counts F:Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.	
						General	
5.25	Zone_Sensor_ StartUp_ Delay	15 2	15 2	225 30	Counts C:Min.	Start-up demand delay. Holds off all unit operation zone sensor and CAVB applications. Hold off FAH-Reheat, FAC, FAH options and all GP outputs. May be used to stagger unit start-ups. Does NOT delay demands in thermostat mode.	
6.01	System_Mode	0	0	12	Option	System mode of operation.Backup ModeControl ValueSystem ModeBackup Mode0Local ThermostatNone1Zone SensorLocal Thermostat3Zone SensorLocal Thermostat3Zone SensorReturn Air Sensor4Remote DemandNone5Remote DemandLocal Thermostat6Remote DemandReturn Air Sensor7Remote DemandZone Sensor	
6.02	OCP_HT_ BkUp_SP	20 95	120 70	240 40	Counts Z:DegF	Backup occupied heating set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only with zone sensor applications. Set point temperature must be < or = $(6.04 - 6.15)$.	
6.03	UnOcp_HT_ BkUp_SP	20 95	160 60	240 40	Counts Z:DegF	Backup unoccupied heating set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only in zone sensor applications. Set point temperature must be < or = (6.05 - 6.15).	
6.04	Ocp_CL_ BkUp_ SP	20 95	100 75	240 40	Counts Z:DegF	Backup occupied cooling set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only in zone sensor applications. Set point temperature must be > or = $(6.02 + 6.15)$.	
6.05	UnOcp_CL_ BkUp_SP	20 95	60 85	240 40	Counts Z:DegF	Backup unoccupied cooling set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only in zone sensor applications. Set point temperature must be > or = $(6.03 + 6.15)$.	
6.06	Override_ Timer	0 0	28 3584	225 28800	Counts E: Sec	After hours override timer. Only used on zone sensor applications without a Net- work Control Panel (NPC).	
6.07	HT_Stg_DB	4 1	4 1	15 3.75	Counts W:DegF	Heating dead-band. Used only with M2 zone sensor applications. Dead-band must be $< $ or = 6.15 - 6.08.	
6.08	CL_Stg_DB	4 1	4 1	15 3.75	Counts W:DegF	Cooling dead-band. Used only with zone sensor applications. Dead-band must be $<$ or = 6.15 - 6.07.	
6.09	Stg_1_HT_Diff	0 0	2 0.5	12 3	Counts W:DegF	Heating stage 1 differential. Used only with zone sensor applications. Differential temperature must be $<$ or = 6.11.	
6.10	Stg_1_CL_Diff	0 0	2 0.5	12 3	Counts W:DegF	Cooling stage 1 differential. Used only with zone sensor applications. Differential temperature must be $<$ or = 6.12.	
6.11	Stg_2_HT_Diff	0 0	4 1	12 3	Counts W:DegF	Heating stage 2 differential. Used only with zone sensor applications. Differential temperature must be > or = 6.09.	
6.12	Stg_2_CL_Diff	0 0	4 1	12 3	Counts W:DegF	Cooling stage 2 differential. Used only with zone sensor applications. Differential temperature must be > or = 6.10 AND < or = 6.13 .	
6.13	Stg_3_CL_Diff	0 0	6 1.5	12 3	Counts W:DegF	Cooling stage 3 differential. Used only with zone sensor applications. Differential temperature must be > or = 6.12 AND < or = 6.14 .	
6.14	Stg_4_CL_Diff	0 0	8 2	12 3	Counts W:DegF	Cooling stage 4 differential. Used only with zone sensor applications. Differential temperature must be $>$ or = 6.13.	
6.15	Zone_Sensor Autochangeover DB_Min	8 2	12 3	40 10	Counts W:DegF	Minimum autochangeover dead-band temperature. Dead-band must be > or = (6.07 + 6.08). Used in zone sensor applications.	

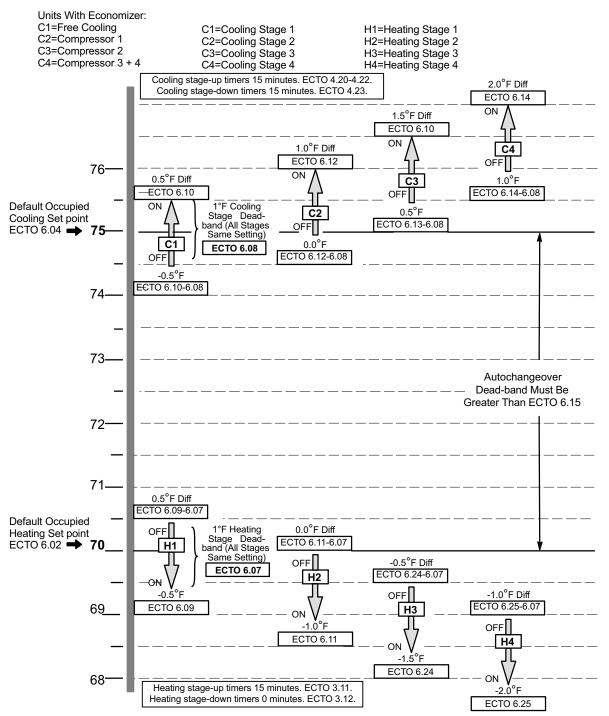


Figure 3. Zone Sensor Stages For Gas / Electric Units (Default Values Shown)

3. Unit Component Operation

3.1. Compressor Protection and Delays

3.1.1. Compressor Minimum Run Time (3 Phase Units Only)

Each compressor stage has a minimum run time of four minutes (ECTO 1.11, 4.13).

3.1.2. Compressor Off Delay (Single phase units only

Compressors have a five minute (default) compressor off delay. (ECTO 1.10, 4.12).

3.1.3. Blower On Delay

On gas units, the blower is delayed 40 seconds (default) after the gas valve is energized. There is no blower delay on cooling and heat pump units (ECTO 1.02, 2.02, 3.02, 4.02).

3.1.4. Freeze-stats (S49, S50, S53, S59)

Normally closed freeze stats open when evaporator coil temperature drops to de-energize the corresponding compressor. Once coil temperature rises the switch automatically resets to allow compressor operation. The corresponding compressor is locked out after three occurrences. (ECTO 4.04).

3.1.5. High Pressure Switches (S4, S7, S28, S96)

High pressure switches open on a pressure rise to de-energize the corresponding compressor for five minutes (ECTO 5.02). Switches automatically reset when pressure drops. The corresponding compressor is locked out after three occurrences. (ECTO 4.14).

3.1.6. High Temperature Switches (compressor internal)

High temperature switches open on a temperature rise to de?energize the corresponding compressor. Switches automatically reset when temperature drops.

On certain compressors, these switches are in series with the high pressure switches, and will cause a five minute (ECTO 5.02) off period, and an alarm code. The corresponding compressor is locked out after three occurrences of either high pressure or high temperature conditions during a demand cycle (ECTO 4.14).

3.2. Gas Units Burner Protection And Delays

3.2.1. Primary or Secondary Limits (S10, S21, S99, S100, S130, S131)

If primary or secondary limits open during heating, the M2 will de-energize the gas valve and energize the blower. If primary or secondary limits open three times during a thermostat cycle, the heat section operation will be locked-out for one hour.

3.2.2. Roll-Out Switch (S47, S69)

If roll-out switch opens, the gas valve will be de-energized and a manual reset is required to restart.

3.2.3. Combustion Air Switch (S18, S45)

If the combustion air switch opens during heating the gas valve is de-energized. If the combustion air switch opens 3 (de-fault) times, the service alarm output will turn on.

3.2.4. Gas Valve Sensor

If the gas valve is not energized 2 minutes after a heating demand, the M2 will display and store error code 58 for gas valve 1 and 68 for gas valve 2.

If the gas valve is energized and de-energized 3 (default) times during a single heating demand, the M2 will display and store error code 59 for gas valve 1 and 69 for gas valve 2. The service relay will be activated.

The M2 will also de-energize all outputs and turn on the service output if the gas valve is energized without a heating demand.

3.2.5. Gas Valve Delays

The M2 has a 30 second (default) delay between first and second stages. A timed off delay (100 seconds default) will prevent gas heat operation until 100 seconds has passed from the previous cycle. (ECTO 3.05, 3.06).

3.3. Miscellaneous Components

3.3.1. Unoccupied Or Night Setback Mode

During the unoccupied time period dampers do not operate at minimum position (no minimum ventilation requirements during unoccupied period).

3.3.2. Local Thermostat Mode

The unoccupied time period occurs when there is no input at A55_P297-8.

3.3.3. Zone Sensor Mode

The occupied time period is controlled by the optional NCP when installed. The A55_P297-8 input is ignored while in the zone sensor mode except during back-up operation.

3.3.4. Gas and Electric Heat Warm-Up Mode (During occupied time period)

Many building codes require a percentage of fresh outdoor air when a conditioned space is occupied. A 24 vac input at unit A55_P297-8 energizes the "occupied" (usually daytime) time period. A field-provided and -installed thermostat or energy management system provides the input.

The first 60 minutes (default) of the first heating demand of the occupied time period is called the "warm-up mode".

During the warm-up mode the M2 keeps economizer dampers closed to conserve energy. (ECTO 2.01, 3.01).

The warm-up mode may be bypassed by pressing the left push-button of the display until "CLR DLY" is seen.

3.3.5. Heat Pump Warm-Up Mode

The default M2 setting allows supplemental heat to be used during warm-up mode. Supplemental heat may be locked out during warm-up mode for energy savings in two different ways. See the Electronic Configure to Order Control Parameters section to lock out supplemental heat during warm-up. ECTO 1.01, 1.17.

3.3.6. Cool-Down Mode (During occupied time period)

To conserve energy, the M2 ignores second-stage cooling demand and the economizer opens the first 30 minutes (default) **OR** one cooling cycle (whichever happens first) when the occupied time period starts. The cool-down mode applies only when outdoor air is suitable for free cooling. ECTO 4.01.

The cool-down mode may be bypassed by pressing the left push-button of the display until "CLR DLY" is seen.

3.3.7. Air Flow Switch (S52-Optional)

The air flow switch closes during normal unit operation. If air flow is interrupted 16 seconds after blower demand, S52 opens and the M2 de-energizes the compressor, gas valves, electric heat, and closes economizer damper. The service alarm output will turn on.

3.3.8. Dirty Filter Switch (S27-Optional)

The dirty filter switch is open during normal unit operation. A dirty filter will close S27 and the M2 will display and store the error code and turn on the service alarm output.

3.4. Gas Heat Operation—Gas Units

The M2 has gas heat output control for up to two gas heat burners with two-stage gas valves. A first-stage heat demand energizes the gas valve low fire and a second-stage heat demand energizes the high fire. On units that have two heat sections, a first-stage heat demand energizes low fire on both gas valves and a second-stage heat demand energizes high fire on both gas valves.

3.5. Electric Heat Operation—Electric / Electric Units

3.5.1. Electric Heat Operation

First-stage heating demand energizes first-stage electric heat (K15 and K17). Second-stage heating demand energizes second-stage electric heat (K16 and K18). When first-stage and second-stage heating demands are simultaneous, a 12-second delay will occur between stage one and stage two (ECTO 2.05).

3.5.2. Primary or Secondary Limits

If an electric heat limit (S15 or S63) opens, electric heat is de-energized.

If an electric heat limit opens three times during a thermostat cycle, the service alarm output will turn on (ECTO 2.04).

3.6. Heat Pump Operation

3.6.1. Heat Operation

First-stage heating demand energizes compressor(s) for first-stage heating. Second-stage heating demand energizes supplemental electric heat via K15, K16, K17, and K18 electric heat contactors. K15 and K17 are energized immediately; K16 and K18 are energized after a 12-second delay (ECTO 1.05).

3.6.2. Primary or Secondary Limits

If an electric heat limit (S15 or S63) opens, electric heat is de-energized.

If an electric heat limit opens five times during a thermostat cycle, the service alarm output will turn on (ECTO 1.04).

3.6.3. Defrost Cycle

Defrost is initiated when the defrost temperature switch (S6 or S9) closes. Defrost terminates either when defrost pressure switch (S46 or S104) opens or when 15 minutes (default) has elapsed. (ECTO 1.16). The defrost cycle is **not** terminated when a thermostat demand ends. Only one defrost cycle is allowed for every 60 minutes (default) of run time. (ECTO 1.15).

The first stage of supplemental electric heat is energized when defrost is initiated (default). In units with multiple refrigerant circuits, supplemental electric heat is energized with each defrost circuit. (ECTO 1.14).

NOTE - If ECTO 1.14 is set to "0", there will be no supplemental heat during defrost.

Economizer dampers close during a defrost cycle.

3.6.4. Supplemental Heat Lock Out

The M2 will not allow the delayed (K16 and K18) bank of electric heat to be energized if the outdoor temperature is above 30°F default (ECTO1.06).

The M2 will not allow any banks of electric heat to energize when outdoor air temperature is above 40°F default (ECTO 1.07).

3.6.5. Test Supplemental Electric Heat Operation

To test the operation of supplemental electric heat at outdoor temperatures above 40°F (default), turn on W2 input only (emergency heat). See "Testing Unit Function" section. Supplemental electric heat will be energized. To test supplemental heat with compressor operating, disconnect outdoor air temperature sensor RT17.

3.6.6. Thermostats With Emergency Heat Function

When ONLY the W2 thermostat input is energized, the M2 will lock-out compressor operation and energize only electric heat. Electric heat temperature lock-outs are also ignored.

3.7. Low Pressure Switches (S87, S88, S98, S97)

Low pressure switches may trip during lower outdoor temperatures, especially with longer time periods between compressor cycling. Each compressor stage has the strike three control feature. The strike three control has three functions:

- 1. De-energizes the compressor for five minutes (default) if the low pressure switch trips (once the ignore time period is elapsed).
- 2. Ignores the low pressure switch for a specified period of time after thermostat demand.
- 3. Locks out the compressor stage if the low pressure switch trips three times within the same thermostat demand (once the ignore time period is elapsed).

3.7.1. Low Pressure Switch Off

Once the ignore time period has passed, the low pressure switch will de-energize the compressor. The M2 will prevent compressor operation for five minutes. See ECTO parameter 5.02 to change compressor off time interval.

NOTE - Low pressure switches are ignored on heat pump units during heating.

3.7.2. Ignore or Shunt Time Period

The specified time period varies according to compressor off time and the outdoor ambient temperature. See chart below for low pressure ignore default times and temperatures and the electronic configure to order (ECTO) parameter used to adjust the ignore time period.

		Compressor C	Off Time ECTO 5.14
		Short < 4 Hrs	Long <u>></u> 4 Hrs
Ambient Temperature	Cold < 70° F	5 Minutes ECTO 5.13	12 Minutes ECTO 5.11
ECTO 5.15	Hot <u>></u> 70° F	2 Minutes ECTO 5.12	6 Minutes ECTO 5.10

3.7.3. Control De-Energizes Unit

If the low pressure switch trips three times (default) during a thermostat demand, the M2 will lock out the compressor. The number of times required to de-energize the unit is adjustable. (ECTO 1.13, 4.15).

3.8. Loss of Power Detection (Single phase units only)

The M2 will turn off compressors for five minutes (default) if a loss of power is detected for two cycles. This indicates a problem with supply voltage; waiting five minutes allows pressures to equalize ensuring start-up. (ECTO 5.02).

3.9. Thermostat Bounce Delay (Local thermostat mode only)

The M2 will ignore room thermostat inputs for three seconds to prevent sporadic cycling.

3.10. Return Air Temperature Limits

Zone temperatures may be limited by changing ECTO parameter 5.05. Change ECTO 5.06 to interrupt a heating demand and ECTO 5.07 to interrupt a cooling demand. If return air temperatures are exceeded, the demand will be interrupted. Error codes 40 or 41 are displayed but not stored in memory for recall.

3.10.1. Smoke Detector (A17-Optional)

If smoke detector senses smoke, normally opened contacts close. The M2 turns off the unit and closes the economizer dampers. Variations in damper position and power exhaust and blower operation may be changed (ECTO 5.01). See table 7.

3.10.2. Safety Switch Input (A42-Optional)

The M2 has a 24 volt optional input (DI-3) which may be used for additional safety switches (such as a blower overload, loss of phase protector, or supply duct high pressure limit switch). Wire the safety switch in series with the input. When the input is de-energized, the M2 will turn off all outputs and display error code #20 (ECTO 5.08). For normal operation, the input must be energized with 24VAC.

ЕСТО		Ex	haust Fan	Fresh Air	
5.01	Blower	Single/Two Stage (2)	VFD	Damper	Description
0	Off	Off	Off	Closed	Unit Off
1	On (1)	Off	Off	Open	Positive Pressure
2	On (1)	On	Speed = ECTO 8.19	Closed	Negative Pressure w/ Blower Exhaust fan at fixed speed
3	On (1)	On	Speed = ECTO 8.19	Open	Purge Exhaust fan at fixed speed
4	Off	On	Speed = ECTO 8.19	Closed	Negative Pressure Exhaust fan at fixed speed
5	On (1)	On	Building Static SP=ECTO 8.19	Closed	Negative Pressure w/ Blower Exhaust fan modulates
6	On (1)	On	Building Static SP=ECTO 8.19	Open	Purge Exhaust fan modulates
7	Off	On	Building Static SP=ECTO 8.19	Closed	Negative Pressure Exhaust fan modulates
(1)-Blow	er with VFDs	operation depends on EC	CTO 0.01 settings. If set to PID, su	polv static SP =	ECTO 0.02, if set to staged, blower

Table 7. Smoke	e Alarm Operation
----------------	-------------------

(1)-Blower with VFDs operation depends on ECTO 0.01 settings. If set to PID, supply static SP = ECTO 0.02, if set to staged, blower speed = ECTO 0.02. For CAV units with bypass dampers, supply static SP = ECTO 0.13.
 (2)-Both exhaust fan stages will operate on units with two stage fans.

4. Sensors

The M2 is only compatible with L connections sensors provided with the unit or purchased separately as specified in the Engineering Handbook.

IMPORTANT - All 0-10Vdc sensors require two separate twisted pair cables with shield. one cable is used for the 24Vac power and one cable is used for the 0-10Vdc output. Zone sensors require a single twisted pair cable with shield. The shield drain wires must be connected to the common at the unit field wiring terminal block only. The shield drain wires must not be connected to common at the sensor.

4.1. Temperature Sensors - Provided With Unit

The return air (RT16) and discharge air (RT6) duct probes and the outdoor air (RT17) are all two wire thermistors. The resistance vs. temperature table is shown below:

Temp. °F (°C)	Resistance +/-2%	Temp. °F (°C)	Resistance +/-2%	Temp. °F (°C)	Resistance +/-2%
-40 (-40.0)	335,671	40 (4.4)	26,106	90 (32.2)	7,332
-20 (-28.9)	164,959	50 (10.0)	19,904	100 (37.8)	5,826
0 (-17.8)	85,323	60 (15.6)	15,313	120 (48.9)	3,756
20 (-6.7)	46,218	70 (21.1)	11,884	130 (54.4)	3,047
30 (-1.1)	34,566	80 (26.7)	9,298		

4.2. Optional Zone Sensor

Zone sensors (A2) are two wire thermistor with 1k series resistor.

Temp. °F (°C)	Resistance +/-2%	Temp. °F (°C)	Resistance +/-2%	Temp. °F (°C)	Resistance +/-2%
40 (4.4)	27,102	60 (15.6)	16,313	80 (26.7)	10,299
45 (7.2)	23,764	65 (18.3)	14,474	85 (29.4)	9,249
50 (10.0)	20,898	70 (21.1)	12,882	90 (32.2)	7,529
55 (12.8)	18,433	75 (23.9)	11,498		

4.3. Optional Relative Humidity Sensor

The indoor Rh sensor (A91) is an analog sensor with a 0-10 Vdc output over an Rh range of 0-100%rh. The sensor is powered with 24Vac.

4.4. Optional CO₂ (IAQ) Sensor

The indoor CO_2 sensor (A63) is an analog sensor with a 0-10Vdc output over a CO_2 range of 0-2000ppm as shown in the following table. The sensor is powered with 24Vac.

CO ₂ PPM	DC Voltage						
0	0	600	3.0	1200	6.0	1800	9.0
200	1.0	800	4.0	1400	7.0	2000	10.0
400	2.0	1000	5.0	1600	8.0		

4.5. Optional Supply Static Pressure Sensor

The supply duct differential static pressure sensor (A30) is an analog sensor with a 0-10Vdc output over a range of 0-5"w.c as shown in the following table. The sensor is powered with 24Vac.

Pressure "w.c.	DC Voltage						
0	0	1.5	3.0	3.0	6.0	4.5	9.0
0.5	1.0	2.0	4.0	3.5	7.0	5.0	10.0
1.0	2.0	2.5	5.0	4.0	8.0		

4.6. Optional Building or Return Static Pressure Sensor

The building static differential static pressure sensor (A34) is an analog sensor with a 0-10Vdc output over a range of –0.5 to 0.5"w.c as shown in the following table. The sensor is powered with 24Vac.

Pressure "w.c.	DC Voltage						
-0.5	0	-0.2	3.0	0.1	6.0	0.4	9.0
-0.4	1.0	-0.1	4.0	0.2	7.0	0.5	10.0
-0.3	2.0	0.0	5.0	0.3	8.0		

4.7. Optional Enthalpy Sensor

The optional enthalpy sensors (A7 and A63) used with the economizer have an output of 4-20ma. The sensor is powered with 24Vac. See figure 13 (Page 29).

4.8. Optional Outdoor Air Control (OAC) Sensor

The optional outdoor air control sensor is an analog sensor with a 0-10Vdc output. Three velocity ranges are available (see table 8). The sensor is powered with 24Vac.

0	MO De esta est	0-5m	n/sec	0-7.5	m/sec	0-10 m/sec	
Sensor Volts	M2 Readout	m/sec.	ft/min.	m/sec.	ft/min.	m/sec.	ft/min.
0.00	0	0.00	0	0.00	0	0.00	0
0.50	5	0.25	49	0.38	74	0.50	98
1.00	10	0.50	98	0.75	148	1.00	197
1.50	15	0.75	148	1.13	221	1.50	295
2.00	20	1.00	197	1.50	295	2.00	394
2.50	25	1.25	246	1.88	369	2.50	492
3.00	30	1.50	295	2.25	443	3.00	590
3.50	35	1.75	344	2.63	517	3.50	689
4.00	40	2.00	394	3.00	590	4.00	787
4.50	45	2.25	443	3.38	664	4.50	886
5.00	50	2.50	492	3.75	738	5.00	984
5.50	55	2.75	541	4.13	812	5.50	1082
6.00	60	3.00	590	4.50	886	6.00	1181
6.50	65	3.25	640	4.88	959	6.50	1279
7.00	70	3.50	689	5.25	1033	7.00	1378
7.50	75	3.75	738	5.63	1107	7.50	1476
8.00	80	4.00	787	6.00	1181	8.00	1574
8.50	85	4.25	836	6.38	1255	8.50	1673
9.00	90	4.50	886	6.75	1328	9.00	1771
9.50	95	4.75	935	7.13	1402	9.50	1870
10.00	100	5.00	984	7.50	1476	10.00	1968

 Table 8. OAC Sensor Velocity Ranges

5. Low Ambient Fan Control

5.1. High Efficiency A Box Fan Operation

The outdoor fan in a high efficiency A Box unit operates at three distinct speeds; High, Low and Extra-low. At higher outdoor temperatures, (above 65F), the fan operates at high speed for a high cooling demand and at low speed for a low cooling or de-humidification demand. At low outdoor temperatures the fan is off until the liquid pressure switch, S11 closes. Then the fan runs at extra-low speed.

5.2. Low Ambient Fan Cycling - Other Units

During low ambient conditions, various outdoor fans are cycled by liquid line pressure switches; S11, S84, S85 and S94. The M2 unit controller will also de-energize fans due to low outdoor temperature. See Figure 4, for fan layouts and tables 9 through 14 for low ambient fan operations.

BOX Size	Fan Layout	Models	Compr.	Fans
A BOX		LCH, LGH 36H,48H,60H	1 (2 step)	1 (vari- able)
DOX		LCH, LGH 36S,48S,60S,72H	1	1
B BOX		LCH, LGH 090,102,120,150	2	2
C1 BOX		LCH, LGH 156	3	3 (2 out- puts)
C2 BOX		LCH, LGH 180	3	4
С3		LCH, LGH 210	3	6
BOX		LCH, LGH 240/300S	4	6
E BOX		LCH, LGH 420,480,540,600	4	6

Figure 4. Number of	Compressors/Fans	and Fan Layout
---------------------	------------------	----------------

Table 9 .LCH, LGH 36S,48S,60S,72H Low Ambient Fan Operations

Models	Fan	Associated Compressor	Fan Control
LCH, LGH 36S,48S,60S,72H	1	1	On with S11

Table 10. LCH, LGH 090,102,120,150 Low Ambient Fan Operations

Models	Fan	Associated Compressor	Low Ambient Control OD Temp < ECTO 4.07 (55F)
LCH, LGH 090,102,120,150	1	1	OFF
LCH, LGH 090, 102, 120, 130	2	. 2	On with S11 or S84

Table 11. LCH, LGH 156 Low Ambient Fan Operations

Models	Fan	Associated Compressor	Low Ambient Control OD Temp < ECTO 4.07 (55F)
LCH, LGH 156	1	1, 2, 3	On with S11 or S84 or S85
LCH, LGH 150	2, 3	1, 2, 3	OFF

Table 12. LCH, LGH 180 Low Ambient Fan Operations

Models	Fan	Associated Compressor	Low Ambient Control OD Temp < ECTO 4.07 (55F)
	1	1, 3	On with S11, S84 or S85
LCH, LGH 180	2	1, 3	OFF
	3	2, 3	On with S84 or S85
	4	2, 3	OFF

Table 13. LCH, LGH 210 Low Ambient Fan Operations

Models	Fan	Associated Compressor	Low Ambient Control OD Temp < ECTO 4.07 (55F) and > ECTO 4.06 (40F)	Low Ambient Control OD Temp < ECTO 4.06 (40F)
	1	1, 3	On with CP1	OFF
	2	1, 3	OFF	OFF
	3	1, 3	On with S11, S84 or S85	On with S11, S84 or S85
LCH, LGH 210	4	2, 3	On with S84 or S85	On with S84 or S85
	5	2, 3	OFF	OFF
	6	2, 3	On with S84 or S85	OFF

Table 14. LCH, LGH 240/300S LCH, LGH 420,480,540,600 Low Ambient Fan Operations

Models	Fan	Associated Com- pressor	Low Ambient Control OD Temp < ECTO 4.07 (55F) and > ECTO 4.06 (40F)	Low Ambient Control OD Temp < ECTO 4.06 (40F)
	1	1, 2	On with CP1 or CP2	OFF
	2	1, 2	OFF	OFF
LCH, LGH 240/300S LCH, LGH	3	1, 2	On with S11 or S84	On with S11 or S84
420,480,540,600	4	3, 4	On with S84 or S85	On with S84 or S85
	5	3, 4	OFF	OFF
	6	3, 4	On with CP3 or CP4	OFF

CP1 - compressor 1, S11 - liquid line pressure switch on circuit 1.

CP2 - compressor 2, S84 - liquid line pressure switch on circuit 2.

CP3 - compressor 3, S85 - liquid line pressure switch on circuit 3.

CP4 - compressor 4, S94 - liquid line pressure switch on circuit 4.

6. Reheat Operation

6.1. Reheat Operation

Reheat is a combination of cooling to dehumidify and heating to maintain space temperature. Supermarket reheat uses gas heat and Humiditrol[®] units route hot gas to a reheat coil downstream of the evaporator. A gas heat unit is required for Supermarket Reheat and a Humiditrol[®] unit is required for Humiditrol Reheat. Economizer operation is disabled during reheat operation except for Supermarket Reheat operation ECTO 4.24 option 1.

6.2. Supermarket Reheat Operation

ECTO 4.24 Option 1 De-Humidistat Control

IMPORTANT - Supermarket Reheat is allowed on gas/electric units only; not electric/electric or heat pump units.

A de-humidistat will bring on first-stage cooling to dehumidify and a room thermostat will energize heating to maintain indoor temperature. To disable free cooling in this mode, select economizer global mode (figure 9) but do not connect the global input (P297-9).

An optional de-humidistat is required. Refer to figure 5.

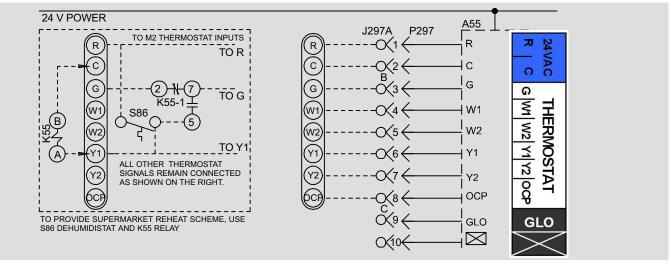


Figure 5. Supermarket Reheat Diagram (ECTO 4.24 Option 1)

ECTO 4.24 Option 2 RH Sensor Control

A relative humidity sensor will bring on first-stage cooling based on the set point set with ECTO 4.25 or from the L Connection network. First-stage cooling will de-energize when RH drops to ECTO 4.25 minus 4.26. A room thermostat or zone sensor will energize heating to maintain indoor temperature.

An optional RH sensor is required. Refer to figure 6.

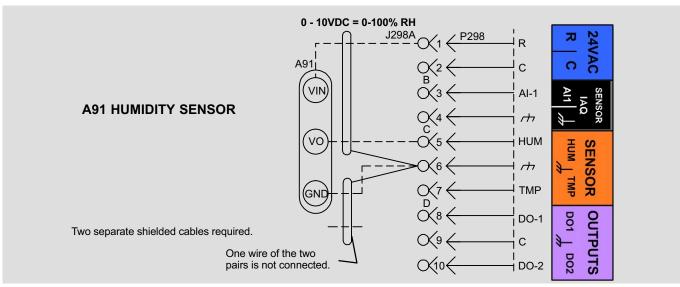


Figure 6. Reheat Sensor Diagram

6.3. Humiditrol Reheat Operation

A relative humidity sensor will energize first-stage compressor(s) and hot gas will be routed to the reheat coil based on the set point set with ECTO 4.25 or from the L Connection network. The following options show additional conditions which must be met before reheat will be energized:

ECTO 4.24 option 3

- Blower energized.
- Occupied time period.
- One previous cooling demand must have occurred.

ECTO 4.24 option 5

• One previous cooling demand must have occurred.

ECTO 4.24 option 6

- Blower energized.
- Occupied time period.

ECTO 4.24 option 7

• No additional conditions.

Humiditrol reheat will de-energize when the RH drops to ECTO 4.25 minus 4.26. An optional RH sensor is required. See figure 6. See tables 18 through 23 for reheat compressor staging. Shaded rows indicate reheat operation.


6.4. Humiditrol Reheat Operation - Digital

ECTO 4.25 Set to 100

Humiditrol reheat is controlled by the digital input A55_P269_9 (M2) only. The input signal will energize compressor(s) and reheat solenoid. Connect wiring to M2 as shown in figure 7. See tables 18 through 23 for reheat compressor staging.

6.5. RH Measurement / Display

ECTO 4.24 option 4—When an optional relative humidity sensor is installed, the % RH can be displayed on the M2 readout and over the L Connection network via the NCP and/or PC software. Option 4 is NOT used to control Humiditrol or Supermarket Reheat. Option 4 may be used for outside air dehumidification. Refer to figure 6.

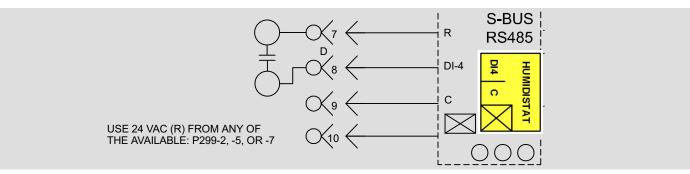



6.6. Outside Air For Dehumidification

The M2 has an option that allows FAT heated outside air to be used to dehumidify when outside air temperature is low. When ECTO 4.24 is set to options 2-7, outside air will be used for dehumidification instead of the compressor. When the outside air temperature is less than set point, ECTO 7.04 must be set to 70°F or less to enable this option. Additional conditions for operation apply. See table 15.

The M2 will use the gas or electric heat to temper discharge air and the outside air will be used to dehumidify (when there is a dehumidification demand and outside air is cool). Adjust the following settings:

ECTO 7.02 Outdoor Air Set point (50°F typical)

ECTO 7.03 Damper Position (40% typical)

ECTO 7.04 Fresh Air Heating Reheat Set point (65°F typical)

This option can be used with ECTO 4.24 options 2-7 only - not with option 1. Refer to table 17.

Table 15. Outside Air for Dehumidification Conditions

ECTO 4.24 Option	Outside Air Dehumidification Conditions
1	Not allowed.
2	Allowed. No conditions apply.
3	Allowed, blower must be energized and in occupied mode. No previous cooling demand is required.
4	Allowed. Must be occupied.
5	Allowed, blower must be energized and in occupied mode. No previous cooling demand is required.
6	Allowed. No conditions apply.
7	Allowed. No conditions apply.

			Tal	ble 16	. Sumr	nary Of Reheat ECTO Options
No.	Name	Min	Default	Max	Units	Description

NO.	Name	wiin	Default	wax	Units	Description
4.24	Reheat_ Control	0	0	7	Option	 Reheat Control Mode 0- No reheat. 1- Supermarket reheat using De-Humidistat (Tstat mode only) 2- Supermarket reheat using RH sensor. 3- Humiditrol reheat. Conditions: Blower must be energized, Must be occupied, At least one previous cooling demand. 4- RH measurement / display. No Supermarket or Humiditrol reheat. 5- Humiditrol reheat. Conditions: At least one previous cooling demand. 6- Humiditrol reheat. Conditions: Blower must be energized, Must be occupied. 7- Humiditrol reheat. Conditions: None
4.25	Reheat_SP	0 0	60 60	100 100	Counts P:%RH	Percent relative humidity where supermarket or Humiditrol reheat demand is energized. Used of Reheat option 2,3,5,6,or 7. Reheat is de-energized at set point – dead-band (ECTO 4.26). If value = 100, Humiditrol reheat is controlled by the digital input A55_P269_9 (M2) only. Ener- gized input signal calls for reheat demand. L Connection Network RH set point will over- ride this set point. (Such as from NCP).
4.26	Reheat_ RH_DB	1 1	3 3	10 10	Counts P:%RH	Reheat RH dead-band. Used of Reheat option 2,3,5,6,or 7. Reheat is on when RH>=ECTO 4.25 and off when RH< ECTO 4.25 – ECTO 4.26.

Table 17. Outside Air for Dehumidification Parameters

No.	Name	Min	Default	Мах	Units	Description
7.02	Reheat_FAH_ OAT_SP	113 60	136 45	175 20	Counts Y:DegF	Outdoor air temperature set point that enables fresh air heating for reheat de- mand and opens damper to ECTO 7.03 when outdoor air is less than set point.
7.03	Reheat_FAH _%_ Damper	5 5	40 40	100 100	Counts P:%	Fresh air damper position during Fresh Air Heating reheat operation.
7.04	Reheat_FAH _SP	139 70	138 Disabled	183 40	Counts X:De- gF	Fresh Air Heating Reheat set point. Minimum value of 138 disables FAH-Reheat.

Der	nano	sk	Unit Operation								
T'Stat or Zone Sensor	Economizer	Dehumidification	Free Cooling On	CP1 On	Reheat Valve 1 On	Summary					
						Idle.					
		Х		Х	Х	CP1 Reheat (Reheat Stage 1)					
	Х	Х		Х	Х	CP1 Reheat (Reheat Stage 1)					
1st				Х		CP1 Cool					
1st	Х		Х			Free Cool					
1st		Х		Х		CP1 Cool					
1st	Х	Х		Х		CP1 Cool					
2nd				Х		CP1 Cool					
2nd	Х		Х	Х		Free Cool, CP1 Cool					
2nd		Х		Х		CP1 Cool					
2nd	Х	Х		Х		CP1 Cool 5					
						vailable on m its equipped with an economizer. Default dehumidification demand = RH (A91) > 60% (RH set point EC- tion demane P299-8 energized if ECTO 4.25 is set to 100 (digital demand). Heating demand overrides reheat.					

Table 18. 1-Compressor Humiditrol Default Operation (using 2-stage Thermostat or Zone Sensor)

TO 4.25). Optional dehumidification demana = P299-8 energized if ECTO 4.25 is set to 100 (digital demand). Heating demand overrides reheat. Table 19. 2-Compressor Huggiditrol Default Operation (using 2-stage Thermostat or Zone Sensor)

I	Deman	iands					Rehe	Unit Operation	
T'Stat	Zone Sensor	Economizer	Dehumidification	Free Cooling On	CP1 On	CP2 On		Summary	
								ldle.	
			Х		Х		Х	CP1 Reheat (Reheat Stage 1)	
		Х	Х		Х		Х	CP1 Reheat (Reheat Stage 1)	
1st	1st				Х			CP1 Cool	
1st	1st	Х		Х	Х			Free Cool	
1st	1st		Х		Х	Х	Х	CP1 Reheat, CP2 Cool (Reheat Stage 2)	
1st	1st	Х	Х		Х	Х	Х	CP1 Reheat, CP2 Cool (Reheat Stage 2)	
2nd	2nd				Х	Х		CP1 Cool, CP2 Cool	
2nd	2nd	Х		Х	Х			Free Cool, CP1 Cool	
2nd	2nd		Х		Х	Х		CP1 Cool, CP2 Cool	
2nd	2nd	Х	Х		Х	Х		CP1 Cool, CP2 Cool	
N/A	3rd				Х	Х		CP1 Cool, CP2 Cool	
N/A	3rd	Х		Х	Х	Х		Free Cool, CP1 Cool, CP2 Cool	
N/A	3rd		Х		Х	Х		CP1 Cool, CP2 Cool	
N/A	3rd	Х	Х		Х	Х		CP1 Cool, CP2 Cool	
Free co TO 4.25	Free cooling operation is only available on units equipped with an economizer. Default dehumidification demand = RH (A91) > 60% (RH set point EC- TO 4.25). Optional dehumidification demand = P299-8 energized if ECTO 4.25 is set to 100 (digital demand). Heating demand overrides reheat.								

Table 20. 3-Compressor Humiditrol Default Operation (using 2-stage Thermostat or Zone Sensor)

De	man	ds	Unit Operation								
T'Stat	Economizer	Dehumidification	Free Cooling On	CP1 On	CP2 On	CP3 On	Reheat Valve 1 On	Reheat Valve 2 On	Summary		
									ldle.		
		Х		Х	Х		Х	Х	CP1 Reheat, CP2 Reheat (Reheat Stage 1)		
	Х	Х		Х	Х		Х	Х	CP1 Reheat, CP2 Reheat (Reheat Stage 1)		
1st				Х	х				CP1 Cool, CP2 Cool		
1st	Х		Х						Free Cool		
1st		Х		Х	Х	Х	Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool (Reheat Stage 2)		
1st	Х	Х		Х	Х	Х	Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool (Reheat Stage 2)		
2nd				Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool		
2nd	Х		Х	Х	Х				Free Cool, CP1 Cool, CP2 Cool		
2nd		Х		Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool		
2nd	Х	Х		Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool		
	coolin	X g ope		X is on	X ly ava	X					

Table 21. 3-Compressor Humiditrol Default Operation (using 4-stage Thermostat DDC with Zone Sensor)

Dem	nands	S							Unit Operation
T'Stat DDC, or Zone Sensor	Economizer	Dehumidification	Free Cooling On	CP1 On	CP2 On	CP3 On	Reheat Valve 1 On	Reheat Valve 2 On	Summary
		X		X	X		X	X	
	X	X		X	X		X	X	CP1 Reheat, CP2 Reheat (Reheat Stage 1)
4.4	Х	Х		Х	X		Х	Х	CP1 Reheat, CP2 Reheat (Reheat Stage 1)
1st	V		X	Х	Х				CP1 Cool
1st	Х	Х	Х	Х	V	V	V	V	Free Cool
1st	X				X	X	X	X	CP1 Reheat, CP2 Reheat, CP3 Cool (Reheat Stage 2)
1st	Х	Х		Х	X	X	Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool (Reheat Stage 2)
2nd	V		х	X X	Х	Х			CP1 Cool, CP2 Cool
2nd	Х	Х	~	X	Х				Free Cool, CP1 Cool CP1 Cool, CP2 Cool
2nd	V								
2nd	Х	Х		Х	Х	X			CP1 Cool, CP2 Cool
3rd	V		X	Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool
3rd	Х	х	Х	X X	X	X			Free Cool, CP1 Cool, CP2 Cool
3rd	V				X	X			CP1 Cool, CP2 Cool, CP3 Cool
3rd	Х	Х		X X	X	X			CP1 Cool, CP2 Cool, CP3 Cool
4th	V				X	X			CP1 Cool, CP2 Cool, CP3 Cool
4th	Х	X	Х	Х	X	X			Free Cool, CP1 Cool, CP2 Cool, CP3 Cool
4th	V	Х		Х	Х	X			CP1 Cool, CP2 Cool, CP3 Cool
Free coo	4th X X X X CP1 Cool, CP2 Cool, CP3 Cool Free cooling operation is only available on units equipped with an economizer. Default dehumidification demand = RH (A91) > 60% (RH set point EC-TO 4.25). Optional dehumidification demand = P299-8 energized if ECTO 4.25 is set to 100 (digital demand). Heating demand overrides reheat.								

Table 22. 4-Compressor Humiditrol Default Operation (using 2-stage Thermostat)

Dei	mano	ds		Unit Operation										
T'Stat	Economizer Dehumidification Free Cooling On CP1 On CP2 On CP2 On CP3 On CP4 On Reheat Valve 1 On Reheat Valve 2 On		2	Summary										
										Idle.				
		Х		Х	Х			Х	Х	CP1 Reheat, CP2 Reheat (Reheat Stage 1)				
	Х	Х		Х	Х			Х	Х	CP1 Reheat, CP2 Reheat (Reheat Stage 1)				
1st				Х	Х					CP1 Cool, CP2 Cool				
1st	Х		Х							Free Cool				
1st		Х		Х	Х	Х	Х	Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool, CP4 Cool (Reheat Stage 2)				
1st	Х	Х		Х	Х	Х	Х	Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool, CP4 Cool (Reheat Stage 2)				
2nd				Х	Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool, CP4 Cool				
2nd	Х		Х	Х	Х					Free Cool, CP1 Cool, CP2 Cool				
2nd		Х		Х	Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool, CP4 Cool				
2nd	Х	Х		Х	Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool, CP4 Cool				

TO 4.25). Optional dehumidification demand = P299-8 energized if ECTO 4.25 is set to 100 (digital demand). Heating demand overrides reheat.

Table 23. 4-Compressor Humiditrol Default Operation (using 4-stage Thermostat DDC with Zone Sensor)

Der	nano	ds								Unit Operation
T'Stat, DDC, or Zone Sensor	Economizer	Dehumidification	Free Cooling On	CP1 On	CP2 On	CP3 On	CP4 On	Reheat Valve 1 On	Reheat Valve 2 On	Summary
		V		V	V			V	V	Idle.
	V	X X		X X	X			X	X X	CP1 Reheat, CP2 Reheat (Reheat Stage 1)
4-1	Х	X			X			X	X	CP1 Reheat, CP2 Reheat (Reheat Stage 1)
1st	Х		х	Х						CP1 Cool
1st	X	X	X	X	X	X		X	X	Free Cool
1st		X		X	X	X		X	X	CP1 Reheat, CP2 Reheat, CP3 Cool (Reheat Stage 2)
1st	Х	Х		Х	X	Х		Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool (Reheat Stage 2)
2nd				Х	Х					CP1 Cool, CP2 Cool
2nd	Х		Х	Х						Free Cool, CP1 Cool
2nd		Х		Х	Х	Х	Х	Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool, CP4 Cool (Reheat Stage 3)
2nd	Х	Х		Х	Х	Х	Х	Х	Х	CP1 Reheat, CP2 Reheat, CP3 Cool, CP4 Cool (Reheat Stage 3)
3rd				Х	Х	Х				CP1 Cool, CP2 Cool, CP3 Cool
3rd	Х		Х	Х	Х					Free Cool, CP1 Cool, CP2 Cool
3rd		Х		Х	Х	Х				CP1 Cool, CP2 Cool, CP3 Cool
3rd	Х	Х		Х	Х	Х				CP1 Cool, CP2 Cool, CP3 Cool
4th				Х	Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool, CP4 Cool
4th	Х		Х	Х	Х	Х	Х			Free Cool, CP1 Cool, CP2 Cool, CP3 Cool, CP4 Cool
4th		Х		Х	Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool, CP4 Cool
4th	Х	Х		Х	Х	Х	Х			CP1 Cool, CP2 Cool, CP3 Cool, CP4 Cool
	Free cooling operation is only available on units equipped with an economizer. Default dehumidification demand = RH (A91) > 60% (RH set point EC- TO 4.25). Optional dehumidification demand = P299-8 energized if ECTO 4.25 is set to 100 (digital demand).									

7. Economizer

7.1. General

The economizer, when configured, controls

- damper position, which determines how much outdoor air is used to meet free cooling or indoor air quality (IAQ) requirements, and
- the optional power exhaust fans.

On a cooling demand, outdoor air is used for free cooling instead of first-stage compressor(s) when outdoor air is suitable (OAS).

7.2. Outdoor Air Suitable (OAS) LED

A yellow LED which is labeled OAS provides economizer status. A steady yellow LED indicates that outdoor air is suitable for free cooling. A flashing yellow OAS light indicates the IAQ sensor requires outdoor air. (A flashing yellow LED can also mean that the economizer dampers are open to bring in fresh air while a compressor is on.) If the economizer is already operating, a flashing yellow OAS light indicates the IAQ sensor requires more outdoor air than is suitable for free cooling (see figure 8).

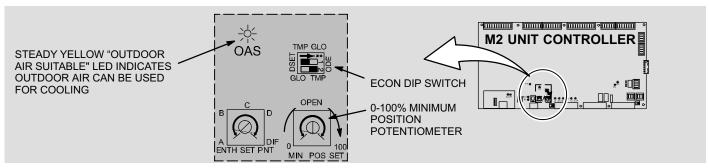


Figure 8. Economizer controls

7.3. DIP Switch Settings

The DIP switch setting determines the mode used to enable free cooling. The DIP switch also has a mode to set the damper minimum position and test damper operation. DIP switch is factory-set when the economizer is factory-configured.

7.4. Free Cooling Discharge Air Set point

When outdoor air conditions are suitable and economizer is set to provide free cooling, dampers will modulate to achieve a discharge air temperature of 55°F (13°C) default. This set point is adjustable between 45° and 65°F.

The set point can also be automatically increased when outdoor or return air temperatures drop. See Outdoor Air Reset and Return Air Reset in the Discharge Air Control section. The unit does not have to be operating in discharge air cooling mode to adjust the set point, or to use set point reset.

The operating profile of the economizer damper, during free cooling when any compressors are on, can be selected as follows:

- damper opens to its maximum position when any compressors start.
- damper continues to modulate while compressors are on, but the effect of mechanical cooling will force the damper closed to its minimum position.
- damper modulates to its maximum position where it remains for at least 3 minutes. If the damper has been continuously
 in this position for at least three minutes, then a second stage cooling demand will be allowed to turn on the first stage
 of mechanical cooling. While the mechanical cooling is on, the damper is held to its maximum position, and does not
 modulate until the second stage demand is satisfied.

7.5. Free Cooling Compressor Lockout Set point

When the outdoor air temperature falls below the free-cooling set point, and outdoor air is suitable, then mechanical cooling is kept off, or is turned off if it is on.

7.6. Outdoor Air Suitability

There are six options available to determine outdoor air suitability (OAS) for free cooling. See table 24. Economizer settings are shown for each mode in figure 9.

The appropriate sensors are provided when the economizer is factory-configured. When the economizer is field-configured, the ODE mode requires additional field-provided sensor(s). See table 24. The TEMP mode uses sensors provided with all units.


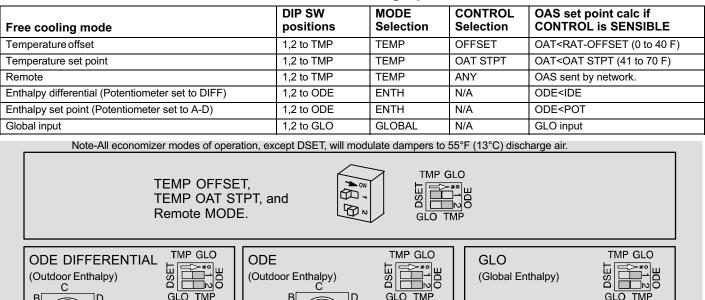


Table 24. Free Cooling Options



SET PNT

ENTH

DIF

6

r in

Set to A

7.7. Enthalpy Set point

DIF

ENTH SET PNT

Set to DIF

-

⁄₽ -

This setting pertains to the ODE free cooling mode only. The M2 will enable free cooling when outdoor air enthalpy (A7) is less than the enthalpy set point. Table 25 shows the approximate enthalpy set points for each potentiometer setting at 50% relative humidity.


Table 25. Enthalpy Control Set Points

	Control Setting	Enthalpy Control Set point At 50% Relative Humidity Approximate Degrees F (C)
The recommended enthalpy set point is "A". If the economizer is allowing air which is too warm or too	А	73 (23)
humid to enter the system, the enthalpy control may	В	70 (21)
be changed to a lower setting (B, C, or D).	С	67 (19)
	D	63 (17)

Example:—At setting "A", the enthalpy control will modulate dampers open when outdoor air is at 73°F and 50% relative humidity. If space temperatures are too warm, rotate the potentiometer to "B". The enthalpy control will now modulate dampers open when outdoor air is 70°F and 50% relative humidity.

7.8. Damper Minimum Position Potentiometer

Set economizer DIP switch to "DSET" position as shown in figure 10. DSET is a manual mode that locks the economizer into minimum position. Rotate MIN POS SET potentiometer to the approximate desired damper position.





Check indicator on damper motor to determine actual damper position. Adjust potentiometer until damper motor reads desired position. See figure 11. Damper minimum position can also be set using ECTO 5.24. This will disable the potentiometer.




Figure 11. Economizer Damper Min. Position

7.9. Damper Maximum Position

Economizer dampers open to 100% at the default setting. Adjust ECTO parameter 5.23 to reduce the maximum damper opening for free cooling.

7.10. Motorized Outdoor Air Damper

Set damper position according to "Damper Minimum Position Potentiometer" section. For normal operation, make sure the economizer DIP switch is set to "GLO" position as shown in figure 9. The damper will open to the specified position during the occupied time period and close during the unoccupied time period.

7.11. Economizer Checkout

The following checkout procedures are completed with unit energized. Confirm proper operation of the heartbeat LED. Step 1 will determine whether the economizer is allowing full damper travel. Use step 2 when the damper does not respond to step 1.

Steps 3, 4, 5, and 6 checkout the operating modes; checkout only the mode that applies to the unit being worked on. Use "DSET" Operation checkout only when step 1 refers to it.

CAUTION - Power exhaust fans will be functional. To prevent operation of gravity exhaust fans, disconnect power to unit and then PED jack/plug P/J18.

Step 1. Economizer Output Voltage

- A Set the DIP switch to DSET.
- **B** Adjust the MIN POS SET potentiometer to the 0% position (fully counterclockwise). The motor will slowly modulate to the closed position.
- **C** Adjust the MIN POS SET potentiometer to the 100% position (fully clockwise). The motor will slowly modulate to the fully opened position.
- **D** If the motor does not respond, go to step 2. If the motor does respond properly, go to the appropriate mode of operation checkout.

Step 2. "DSET" OPERATION

- A Set the DIP switch to the "DSET" position.
- **B** Adjust the MIN POS SET potentiometer to the 0% position (fully counterclockwise).
- **C** Measure the voltage on P262 between pin 3 (VOT damper control) and pin 2 (GND) **using pin 1 as common.** Voltage should read approximately 2 VDC.
- D Adjust the MIN POS SET potentiometer to the 100% position (fully clockwise).

NOTE - Allow approximately 30 seconds for voltage to react.

E Measure the voltage between P262 between pin 3 (VOT damper control) and pin 2 (GND) using pin 1 as common. Voltage should read approximately 10 volts DC.

Step 3. "ODE" Mode of Operation

In the ODE mode, dampers open for free cooling when the outdoor enthalpy is less than the enthalpy set point; dampers will modulate discharge air temperature (RT6) to 55°F (13°C).

- **A** Set the DIP switch to ODE mode.
- **B** To simulate low outdoor enthalpy, set the enthalpy set point to "B." Disconnect A7 outdoor enthalpy sensor jack/ plugs J/P104. Connect a 200 ohm resistor across plug J104-1 and J104-2. J104 is located in the filter access area.
- **C** After a few seconds delay, the yellow OAS LED (see figure 8) should turn on.
- **D** If the OAS LED does not turn on, check all connections and wiring between J104 and the control.

Step 4. "ODE Differential" Mode of Operation

In the DIF mode, dampers open for free cooling when the outdoor air enthalpy is lower than the return air enthalpy; dampers will modulate discharge air temperature (RT6) to 55°F (13°C).

- **A** Set the DIP switch to ODE.
- **B** Set the enthalpy set point potentiometer to DIF.
- **C** Use two resistors to simulate outdoor air enthalpy suitable.
- Disconnect A62 return air enthalpy sensor jack/plug J/P105. Place a 750 ohm resistor between J105-1 and J105-3. J/P105 is located in the filter access area.
- Disconnect A7 outdoor enthalpy sensor jack/plugs J/P104. Connect a 100 ohm resistor across J104-1 and J104-2.
- **D** After a few seconds delay, the yellow OAS LED will turn on.

Step 5. All "TMP" Modes of Operation

In the TMP modes, the damper opens for free cooling when the outdoor air temperature is:

- Less than return air temperature (TMP DIFFERENTIAL)
- ECTO 6.26 less than return air temperature (TMP OFFSET)
- Less than ECTO 6.26 (TMP)

In all modes, dampers will modulate discharge air temperature (RT6) to 55°F (13°C).

Refer to the "Displaying Sensor Inputs" section to read return air (RT16) and outdoor air (RT17) temperatures. If outdoor air is not cooler than return air, simulate a colder outdoor air temperature with a resistor. Select a resistor value that corresponds to a temperature (see table 26):

- Less than return air temperature (TMP DIFFERENTIAL)
- ECTO 6.26 less than return air temperature (TMP OFFSET)
- Less than ECTO 6.26 (TMP)

Table 26. TMP Mode Resistor Values

Temp. °F (°C)	Size Resistor						
30 (-1)	34,566	50 (10)	19,904	70 (21)	11,884	90 (32)	7,332
40 (4)	26,106	60 (16)	15,313	80 (27)	9,298	100 (38)	5,826

- A RT17 is located on the right wall of the control/compressor section on non-heat pump units. RT17 is located on the right front corner mullion of heat pump units. Disconnect 1/4" quick connect terminals on wires leading from sensor.
- **B** Jumper RT17 wires leading back to control with the appropriate resistor.
- **C** After a few seconds delay, the yellow OAS LED should turn on.
- **D** If the OAS LED does not turn on, check all connections and wiring between RT17 and the M2 board, and between RT16 and the M2 board.

Step 6. GLO Modulating Mode of Operation

In the GLO (modulating) mode, dampers modulate open for free cooling when the global input is energized; dampers will modulate discharge air temperature (RT6) to 55°F (13°C).

NOTE - The global input turns on the blower.

- A Set the DIP switch to GLO.
- **B** Connect a jumper between A55_P297-1 (24vac) and A55_P297-9 (global). The blower will be energized and the damper will slowly open if discharge air temperature (RT6) is greater than 55°F (13°C).
- **C** Disconnect 24vac to A55_P297-9. The blower will turn off and the damper will close.
- **D** If the damper does not actuate check all connections and wiring between P262A and B.

Step 7. Enthalpy Sensor Operation (A7 and A62)

A Connect a DC ammeter as shown in figure 12 to measure current of A7 or A62.

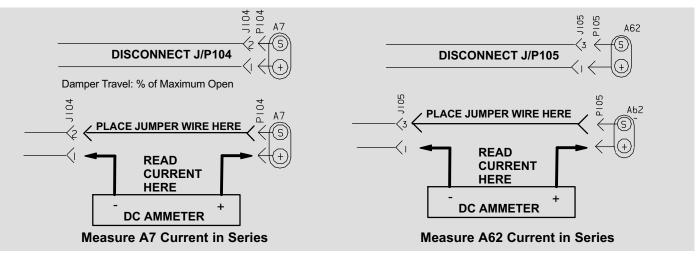


Figure 12. Measure A7 and A62 Current in Series

B The reading will be between 4 and 20 ma. depending on outdoor temperature and humidity. Refer to figure 13 to approximate reading.

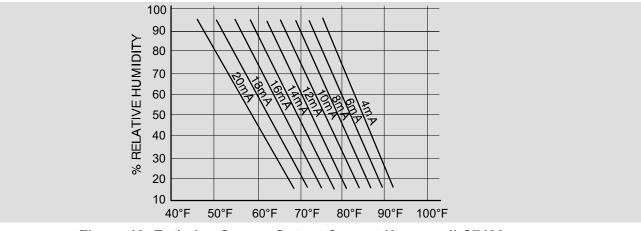


Figure 13. Enthalpy Sensor Output Current Honeywell C7400

C If the meter reads zero, check sensor wiring harness for continuity and/or check polarity of sensor wiring.

7.12. Demand Control Ventilation

7.12.1. General

A field-provided and installed indoor air quality sensor can be used with the modulating economizer to control CO_2 levels in the conditioned space. The CO_2 level in a space is an indicator of the number of people occupying a room. As the CO_2 level rises (indicating the occupancy of a room has increased), economizer dampers modulate open - regardless of outdoor air enthalpy. Likewise, as the CO_2 level falls (indicating the occupancy has decreased), economizer dampers modulate further closed.

Standard economizer installations have a minimum fresh air ventilation requirement based on maximum room occupancy. With standard economizer use, the amount of air required for maximum room occupancy is heated or cooled with each heating or cooling cycle. IAQ economizer installations use the maximum amount of required ventilation air only with maximum room occupancy; less outdoor air needs to be heated or cooled when fewer people are in the conditioned space.

If the economizer is operating in the free cooling mode and the IAQ control requires the damper to open further, the IAQ demand will override the free cooling demand. A flashing OAS LED (see figure 8) indicates an IAQ override condition.

The IAQ function is not energized during the unoccupied or night time period.

NOTE - The IAQ sensor may also be used with systems containing a motorized outdoor air damper.

7.12.2. Default Operation

The M2 has a 0-10VDC IAQ input for a standard 0-2000ppm CO_2 sensor. The economizer starts opening at a CO_2 level of 500 ppm ("start open" set point) and reaches full open at a CO_2 level of 1000ppm ("full open" set point). The damper opens to 100%. Determine damper travel position using the following formula.

% Damper Travel = <u>CO₂ppm - Start Open ppm</u>

Example: At a CO_2 level of 750ppm, the damper will be approximately 50% open:

5

Use "Displaying Sensor Inputs" section to read CO₂ ppm. Figure 14 shows default or proportional operation.

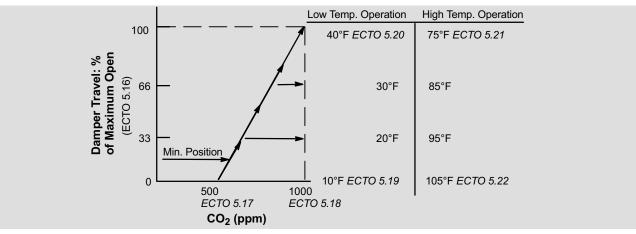


Figure 14. Default DCV Operation

7.12.3. ECTO Adjustments

Default IAQ economizer operation is based on common or average applications. Adjustments may be made to the IAQ ECTO parameters to alter operation or meet required specifications. Use the "ECTO Control Parameters" section to change ECTO parameters 5.16 through 5.22.

Select a DCV or OAC mode with ECTO 5.26. Modes 4 and 5 will bring on the unit blower when DCV calls for maximum damper open, and returns to auto-blower when DCV damper returns to 0. The other modes only operate when the unit blower is on, but will not bring it on themselves.

Some applications require a different CO_2 set point range than default settings. Damper "start open" (ECTO 5.17) and "full open" (ECTO 5.18) CO_2 set points may be adjusted from 0 to 1992ppm. Use the following formula to determine damper travel.

NOTE - When changing CO₂ set point range, "start open" set point should be less than "full-open" set point.

Example: An application requires the dampers open at 800 CO_2 ppm and reach full open at 1200. If the CO_2 level in the space reads 1000 ppm, calculate the damper percent open as follows.

% Damper Travel = $\frac{1000 - 800}{1200 - 800}$ or $\frac{200}{400}$ or .5 = 0.5 x 100 = 50%

7.12.3.1. Set Point Control Option

% Damper Tra

Set point Control mode is commonly used in areas with high occupancy and frequent change out such as classrooms or conference rooms.

In applications requiring this on/off damper response to CO_2 levels, set the "start open" (ECTO 5.17) set point higher than the "full open" (ECTO 5.18) set point. The dampers will drive to fully-open position immediately. Figure 15 shows the set point control option.

Change ECTO 5.19 and 5.20 to set the minimum outdoor temperature limits. Change ECTO 5.21 and 5.22 to set the maximum temperature value.

IMPORTANT - Mixed air temperatures less than 45°F (7°C) on units with an aluminized heat exchanger or less than 30°F (-1°C) on stainless steel heat exchangers will void the manufacturer's warranty.

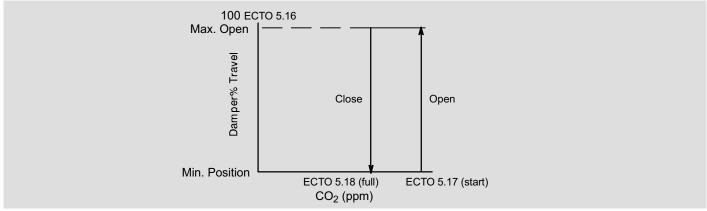


Figure 15. Set point Control IAQ Option

7.12.3.2. Determine IAQ Input

Check IAQ input (ppm) by using the "DATA/SENSORS" menu selection from the Prodigy display.

7.12.4. Outdoor Air Control Sensor (OAC)

An optional flow sensor (A24) may be used to control the amount of outdoor air brought into the space. If option 2 for ECTO 5.26 is selected, the M2 will modulate the outdoor air damper in order to hold a constant outdoor airflow. This option is very useful in VAV applications to maintain a constant outdoor airflow as the delivered air volume varies. A 0-10VDC flow meter located in the unit fresh air intake provides a signal to the general purpose board input A133_P194-6 (TB22-6). The M2 will modulate the damper based on ECTO 5.16 through 5.22 and ECTO 9.09-9.11 in order to maintain a constant air flow..

Unless the OAC kit instructs otherwise, use

ECTO 5.17 = 0 ECTO 5.18 = 255 ECTO 5.26 = 2 (use 3 for no OAT limits) ECTO 9.01 = 5 ECTO 9.09 = 2 ECTO 9.10 = 30

Adjust ECTO 5.19 through 5.22 to modify Outdoor Air Flow operation based on the outdoor air temperature. Select ECTO 5.26 option 3 when this option is not desired.

In OAC mode, the M2 closes the damper as voltage increases to maintain a constant amount of fresh air. The sensor will read 10VDC at maximum flow and 0VDC at minimum flow.

7.12.4.1. Field Wiring

When outdoor air control sensor is field-installed, connect as shown in figure 16.




Figure 16. OAC Sensor Wiring

7.12.4.2. Set Damper Minimum Position

- 1. Operate unit at full supply air CFM with all zone dampers open. Refer to VFD Supply Air Blower Start-Up section in the unit installation instruction.
- 2. Use an air flow hood to measure the outdoor air CFM entering the unit.
- 3. Set economizer DIP switch to "DSET" position as shown in figure 17. DIP switch is located in the economizer section.
- Adjust the MIN POS SET potentiometer until the air flow hood reads the design minimum outdoor air CFM (see figure 17.)

NOTE - Refer to local codes or authorities having jurisdiction when determining design minimum outdoor air requirements. 5. Return the economizer DIP switch to original position.



Figure 17. Economizer Manual Damper Set DIP Switch

7.12.4.3. Set Velocity Sensor Range

The velocity sensor is factory-set for 0-5m/s. (0-984ft/min.) If a higher velocity is required, move the sensor jumper as shown in figure 18.

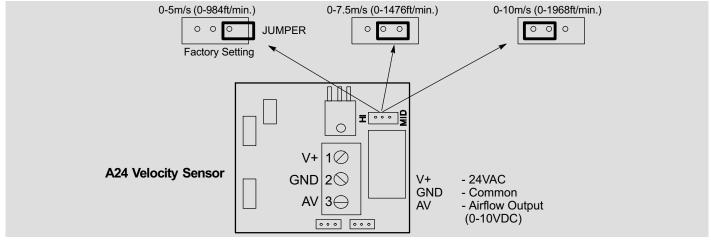


Figure 18. Velocity Sensor (A24) Range

7.12.4.4. Set Velocity Set point

- 1. Measure DC voltage between TB22-6 and TB22-10.
- 2. Multiply DC voltage by 25.4.
- 3. Round to the nearest whole number, and enter the result in ECTO 9.02.

		Та	ble 27. C	Dutdoo	or Air C	ontrol ECTO Parameter Summary				
Con	trol Parameter	Co	ontrol Valu	е						
No.	Name	Min	Default	Max.	Units	Description				
5.17	OAC_Dampr_St art_Open_SP	0	2.51	10	R: Volt	Damper "start open" set point for Outdoor Air Control. Level where fresh air damper begins to open.				
5.18	OAC_Dampr_F ull_Open_SP	0	5.02	10	R: Volt	Damper "full open" set point for Outdoor Air Control. Level where fresh air damper is opened to maximum.				
5.26	IAQ_Input_ Source/Mode	0	0	5	Option	 IAQ input source and mode (0-3 operate only when blower is on). 0- DCV System IAQ. Either P298-3 or network IAQ. 1- DCV System IAQ. Either P298-3 or network IAQ with no OAT limits. 2- Outdoor Air Control Sensor A24 (A133_P194-6) (TB22-6). 3- Outdoor Air Control Sensor A24 (A133_P194-6) (TB22-6) with no OAT limits. 4- DCV System IAQ. Either P298-3 or network IAQ with blower on/auto operation. 5- DCV System IAQ. Either P298-3 or network IAQ with blower on/auto operation with no OAT limits. 				
9.01	A01_control_ mode	0	0	11	Option	Analog output channel 1 control mode. Control I Enabled When Control 1- Occupied PID set point A Unoccupied PID set point A Unoccupied Staged output B 3- Occupied PID set point A Unoccupied Staged output B 5- Blower On PID set point A Blower Off PID set point A Blower Off PID set point B 6- Blower Off Staged output A Blower Off Staged output A Blower Off PID set point B 7- Blower Off Staged output A Blower Off PID set point B 8- Blower Off Staged output A Blower Off PID set point B (1) D11 (A133_P194-2) on PID set point A (2) Otherwise off Otherwise off 11- DI2 (A133_P194-2) on				
9.02	AO1_SP_A	0 0 -0.5 0	127 5.00 0 2.5	255 10.0 0.5 5.0	Counts R:Volts M:"w.c. N:"w.c.	Analog output channel 1 set point A				
9.09	AO1_PID_P_ Constant	0	0	127	Counts	Analog output channel 1 PID loop proportional constant.				
9.10	AO1_PID_I_ Constant	0	0	127	Counts	Analog output channel 1 PID loop integral constant.				

8. Power Exhaust Operation

8.1. Single Fan or Blower

The M2 has several exhaust control options selected by ECTO 8.16. The default operation, option 0, is single-stage energized when the fresh air damper opens to 50% Travel (ECTO 8.20). The blower must be operating.

Units equipped with an A133 (GP) board with the DIP configuration switch set to VAV, may control the fan by a building pressure switch (S37 or S39) or a pressure transducer (A34).

8.2. Two Fans or Blowers

Units equipped with two-stage exhaust fan and A133 (GP) board with the DIP configuration switch set to VAV, may control the fan stage by two fresh air damper position set points, two pressure switches or from two pressure sensor set points.

8.3. Exhaust Blower VFD

Units equipped with a power exhaust VFD and A133 (GP) board with the DIP configuration switch set to VAV, may vary the speed of the blower to maintain a building pressure set point.

There are four exhaust fan enable options to choose from when the unit is equipped with a GP board:

- 1. On when blower is energized.
- 2. On always.
- 3. On during occupied period.
- 4. On if optional digital input A133_P194_1 is energized.

See table 28 for more details.

Table 28. ECTO 8.16 Exhaust Control

Option	Single-Stage Exhaust			Set poi	nts		Dead-band		
ECTO 8.16	Enabled when	Input		Default	ECTO		Default	ECTO	
0	Blower is energized.	Fresh Air Damper Position	on	50% Travel	8.20		10% Travel	8.21	
50% Travel (I less than the VAV units wit	th single stage exhaust fans use ECTO 8.20) when the blower is of set point or when the blower is of h VFDs could use this option for vill operate at speed set with EC	operating. The exhaust w le-energized. single stage operation. I	vill de-energize when the	damper positi	on decrea	ises	s 10% (ECTO 8	8.21)	
1	Always								
2	Occupied	A133 Digital Input 1 (P19 (Pressure Switch S37)	94-1)(TB18-1)	Input energiz	ed by pres	ssui	re switch setting	g.	
3	Blower is energized.	(
4	operate at speed set with ECTO 8 Always	5.17 (50% default).							
4	Always								
5	Occupied	A133 Analog Input 2 (P1	94-7) (TB18-7)	(4)			(1)		
6	Blower is energized	(Pressure Sensor A34)		-0.3"w.c. ⁽¹⁾	8.20		0.04"w.c. ⁽¹⁾	8.21	
7	A133 Digital Input 1 (P194-1) is energized (enable switch)								
CAV units equ above ECTO have a buildin VAV units with	quire adjustment in most cases. iipped with an A133 board set for 8.20 setting. Exhaust air will de-ei g pressure sensor connected to th vFDs could use this option for si operate at speed set with ECTO 8 Two-Stage Exhaust	nergize when the voltage ne Analog Input. ingle stage operation. In th	decreases by the dead-b	and set with EC	TO 8.21.	This	option typically	y would	
	-			50% Travel	8.20	1	20% Travel	8.23	
8	Blower is energized	Fresh Air Damper Position	on	10% Travel	8.21	2	64% Travel	8.24	
Units equippe stage one who exhaust fan re adjusted for th the blower is o	ust be adjusted for proper operation d with an A133 board set for VAV en the fresh air damper position re alay (K201) for stage two when the is operation. Stage 2 will de-ener de-energized. Stage two will not e de-energized for 100 Seconds (E	operation and two-stage operation and two-stage operations 50% Travel (ECTC) operations fresh air damper position gize when the damper position nergize until 0 seconds de	0 8.20) when the blower is n reaches (ECTO 8.23) w sition decreases the % se	s operating. The hen the blower at with ECTO 8.2	e A133_P1 is operatir 24 less tha	194- ng. I an tl	5 output energ ECTO 8.23 mus he set point or v	izes st be when	

Option	2-Stage Exhaust (cont'd)	Input1 Input2				Set points	# Dead-band			
ECTO 8.16	Enabled when		Inputz		Default	ECTO	Default	ECT		
9	Always	A133 Digital Input 1		ital Input 2				I		
10	Occupied	(P194-1)(TB18-1)	(P194-2)	(Pressure	Input energized by pressure switch setting.					
11	Blower is energized	(Pressure Switch S37)	Switch S	39)						
stage one wh has been de- VAV units wit	ed with an A133 board set for VA ten enabled. Stage two will not e energized for 100 Seconds (EC h VFDs could use this option for the speed set with ECTO 8.17	nergize until 0 seconds de ГО 8.22). two stage operation. In th	efault (ECTO at case, the	8.25) after sta A55_P265-11	ge one. Stage output is use	e 1 will not d	e-energize ur	ntil stage two		
12	Always				-0.3"w.c.	8.20	1 0.04 VD	C 8.21		
12	Aways				-0.42"w.c.(1) 8.23	2 0.25"w.c	.(1) 8.24		
10	Occurried				-0.3"w.c.	8.20	1 0.04 VD	C 8.21		
13	Occupied	A133 Analog Input 2 (1	B18-7)(P19	4-7) (Pressure	-0.42"w.c.(1) 8.23	2 0.25"w.c	.(1) 8.24		
		Sensor A34)		, (-0.3"w.c.	8.20	1 0.04 VD	C 8.21		
14	Blower is energized				-0.42"w.c.(1) 8.23	2 0.25"w.c	.(1) 8.24		
	A133 Digital Input 1 (P194-1)				-0.3"w.c.	8.20	1 0.04 VD	C 8.21		
15	is energized (Enable Switch)				-0.42"w.c.(1) 8.23	2 0.25"w.c	.(1) 8.24		
ECTO	VFD Exhaust With Low Sp		Set points		Set points During Smoke Alarm		Minimum Speed			
8.16	Enabled when	Input	Default	ЕСТО	Default	ECTO	Default	ECTO		
16	Always	A133 Analog Input 2 (TB18-7) (P194-7)	-0.30"w.c.	8.20	-0.30"w.c.	8.19	10% ⁽¹⁾	8.21		
17	Occupied	(Pressure Sensor A34)								
18	Blower is energized									
19	A133 Digital Input 1 (P194-1) is energized (Enable Switch)									
Units with ex the exhaust r minimum spe exceeds the The PID loop	hust be adjusted for proper opera haust VFDs use this option for va notor speed to maintain the stati- bed for a time period of 30 secon set point by 10%. This option typ proportional (P) constant may b 0.8.25 and the reset value may b VFD Exhaust	ariable speed exhaust ope c pressure set point (ECT ds, it will de-energize for a ically would have a buildir e adjusted by ECTO 8.23,	O 8.20). EC minimum tin g pressure s integral (I) c	O 8.20 must b ne period of 30 sensor connec	be adjusted fo D seconds. Ex ted to the Ana be adjusted by Set point	r this operat chaust will er alog Input	ion. If exhaus nergize when , derivative m	t operates at feedback		
20	Always									
21	Occupied	A122 Analas Insut 2								
22	Blower is energized	A133 Analog Input 2 (TB18-7)(P194-7)(Pres-	-0.30"w.c.	8.20	-0.30"w.c.	8.19	10% ⁽¹⁾	8.21		
23	A133 Digital Input 1 (P194-1) is energized (Enable Switch)	sure Sensor A34)								
Units with ex the exhaust r cycle off whil The PID loop	nust be adjusted for proper opera haust VFDs use this option for va notor speed to maintain the stati e enabled. This option typically w proportional (P) constant may be 8.25 and the reset value may be	ariable speed exhaust ope c pressure set point (ECT vould have a building pres e adjusted by ECTO 8.23,	O 8.20). ECT sure sensor	O 8.20 must b connected to t	be adjusted fo he Analog Inp	r this operat out.	ion. Exhaust f	an will not		

Supply Air Delivery 9.

9.1. **Blower Delays**

The following examples describe blower function for constant air volume (CAV) applications.

9.1.1. Gas / Electric Units:

The blower is delayed 40 seconds (default ECTO 3.02) after the gas valve is energized and 120 seconds (default ECTO 3.03) after the gas valve is de-energized. The blower operates anytime a heat limit trips.

9.1.2. **Electric / Electric Units:**

The default on delay is set to 0 (ECTO 2.02). The blower is delayed off for 20 seconds (default ECTO2.03) after the heating demand is terminated.

9.1.3. **Cooling Operation:**

The default on and off delays are 0, but may be adjusted by ECTOs 4.02 or 4.03. The on-delay time period starts when the cooling demand is initiated. The off-delay time period starts when the cooling demand is terminated.

9.1.4. Heat Pump Operation:

The default on-delay is 0 (ECTO 1.02),		Blower On	Delay	Blower Off Delay		
but the off-delay default is 20 seconds (ECTO 1.03). The on-delay time period	Unit operation	Default	ECTO	Default	ECTO	
starts when the heat pump heating de-	Gas Heating	40 Sec.	3.02	120 Sec.	3.03	
mand is initiated. The off-delay time period starts when the heat pump heat-	Electric Heating	0 Sec.	2.02	20 Sec.	2.03	
ing demand is terminated. The follow-	Cooling	0 Sec.	4.02	0 Sec.	4.03	
ing chart summarizes blower delays.	HP Heating	0 Sec.	1.02	20 Sec.	1.03	

9.2. Supply VAV Control Mode

The M2 uses the General Purpose GP1 board to control optional supply air and power exhaust blower variable frequency drives (VFD). The DIP switch on the GP1 board must be set to VAV. The GP1 controls the supply air VFD or by-pass damper in response to a duct static pressure reading. VFD powered blowers can be varied or staged.

The GP1 sensor inputs and VFD outputs are 0-10VDC. Duct static pressure sensor (A30) is 0-5"w.c.

The M2 has a maximum supply duct pressure limit (EC-TO 0.21, default 2"w.c.) If this limit is exceeded the control will shut off the unit. After an off delay time of 5 minutes (ECTO 5.02), the blower will re-energize. The control will lockout on the third trip (ECTO 0.22) and an M2 reset will be required.

The following examples describe air delivery for optional supply air VFD and by-pass damper configurations. Refer to table 29 for a summary of ECTO 0.01 options.

Tab	le 29. ECTO 0.01 Se	electio	n Sum	mary			
ECTO 0.01	Mode	SMK	VT	CL	HT		
0	CAV	-	-	-	-		
1	CAV w/bypass damper	PID	PID	PID	PID		
3	VAV w/VFD (MSAV)	STG	STG	STG	STG		
7	VAV w/VFD	PID	STG	STG	STG		
11	VAV w/VFD	STG	PID	STG	STG		
15	VAV w/VFD	PID	PID	STG	STG		
19	VAV w/VFD	STG	STG	PID	STG		
23	VAV w/VFD	PID	STG	PID	STG		
27	VAV w/VFD	STG	PID	PID	STG		
31	VAV w/VFD	PID	PID	PID	STG		
35	VAV w/VFD	STG	STG	STG	PID		
39	VAV w/VFD	PID	STG	STG	PID		
43	VAV w/VFD	STG	PID	STG	PID		
44	VAV w/VFD	PID	PID	STG	PID		
51	VAV w/VFD	STG	STG	PID	PID		
55	VAV w/VFD	PID	STG	PID	PID		
59	VAV w/VFD	STG	PID	PID	PID		
63	VAV w/VFD	PID	PID	PID	PID		
STG=Staged Control; PID=PID Loop or Modulating Control							

I

Local Thermostat Mode, Single Zone CAV Units 9.2.1.

ECTO 6.01 option 0 (Default)

This configuration is used for thermostat or DDC applications when the blower is controlled by the G thermostat demand 24VAC input.

9.2.2. Zone Sensor mode, Single Zone CAV Units

ECTO 6.01 option 1,2,3

This configuration is used with an L Connection Zone sensor for single zone constant air volume application. Blower cycles with demand unless ECTO 6.17 is set to 1. In that case the blower will operate continuously during occupied periods and cycles with demands during unoccupied periods. All delays as described in Local Tstat Mode still apply.

9.2.3. Local Thermostat Mode, CAV Bypass Zoning Units

ECTO 6.01 option 0 (default) or 12 ECTO 0.01 option 1

This configuration is used for 3rd party zoning systems that utilize a blower bypass damper for controlling duct static. There are four different set points: one for cooling, one for ventilation, one for operation during smoke alarm modes, and one for heating. Blower operates when the G demand is energized. The blower also operates anytime a heat limit trips. All delays as described in Local Tstat Mode still apply. The M2 controls duct static pressure by reading the duct pressure and varying the bypass damper position between minimum and maximum positions.

The minimum/maximum damper positions and static pressure set points are listed as follows:

Orequetien	Minin	Minimum Position		Maximum Position		t Static SP
Operation	Default	ECTO	Default	ECTO	Default	ECTO
Cooling	20%	0.17	100%	0.19	1.00"w.c.	0.16
Ventilation	20%	0.17	100%	0.19	1.00"w.c.	0.14
Smoke Alarm Modes	20%	0.17	100%	0.19	1.00"w.c.	0.13
Heating	20%	0.18	100%	0.19	1.00"w.c.	0.15

9.2.4. L Connection Network, CAV Bypass Zoning Units

ECTO 6.01 option 4,5,6,7;

ECTO 0.01 option 1

This configuration is used for L Connection Zoning that utilizes a blower bypass damper for controlling duct static. There are four different set points: one for cooling, one for ventilation, one for operation during smoke alarm modes, and one for heating. Network commands energize the blower. Blower will cycle with demand unless ECTO 6.17 is set to 1. In that case, the blower will operate continuously during occupied periods and will cycle during unoccupied periods. Blower also operates anytime a heat limit trips. All delays as described in Local Tstat Mode still apply.

The M2 controls duct static pressure by reading the duct pressure and varying the bypass damper position between and minimum and maximum positions. The min/max damper positions and static pressure set points are listed as follows:

Onenetien	Minimum Position		Maxir	Maximum Position		t Static SP
Operation	Default	ECTO	Default	ECTO	Default	ECTO
Cooling	20%	0.17	100%	0.19	1.00"w.c.	0.16
Ventilation	20%	0.17	100%	0.19	1.00"w.c.	0.14
Smoke Alarm Modes	20%	0.17	100%	0.19	1.00"w.c.	0.13
Heating	20%	0.18	100%	0.19	1.00"w.c.	0.15

9.2.5. Local Thermostat Mode, VAV units

ECTO 6.01 option 0 (default) or 12;

ECTO 0.01 option 63

This configuration is used for 3rd party VAV zoning systems. Blower speed is controlled by the factory installed VFD between a minimum and maximum speed to maintain duct static pressure set points. There are four different set points: one for cooling, one for ventilation, one for operation during smoke alarm modes, and one for heating. The blower is enabled by a G demand. The M2 controls the duct static pressure by reading the duct pressure and varying the blower speed on units with VFDs.

The minimum/maximum speed and static pressure set points are listed as follows:

Operation	Minimum Speed		Мах	Maximum Speed		t Static SP
Operation	Default	ECTO	Default	ECTO	Default	ECTO
Cooling	50%	0.06	100%	0.08	1.00"w.c.	0.05
Ventilation	50%	0.06	100%	0.08	1.00"w.c.	0.03
Smoke Alarm Modes	50%	0.06	100%	0.08	1.00"w.c.	0.02
Heating	50%	0.07	100%	0.08	1.00"w.c.	0.04

9.2.6. Local Thermostat Mode, VAV staged units

ECTO 6.01 option 0 (default) or 12;		Staged Speed	
ECTO 0.01 option 3 (MSAV)	Operation	⁽¹⁾ Default	ECTO
This configuration is a special case application	Cooling compressor 1	51%	0.05
where the blower speed is staged by the factory		51%	0.14
installed VFD for fixed speeds for different oper- ation. There are seven different speed stages,	Cooling compressor 3	51%	0.15
one for each cooling compressor stage (4), one	Cooling compressor 4	51%	0.16
for ventilation, one for heating and one for opera-	Ventilation or economizer free cooling	51%	0.03
tion during smoke alarm modes. The blower is		51%	0.02
enabled by a G demand. This table shows the	Heating	51%	0.04
default staged speeds.	⁽¹⁾ Staged % speed must be adjusted for each operation.		

9.2.7. L Connection Network, VAV units

ECTO 6.01 option 4, 5, 6, or 7;

ECTO 0.01 option 63

This configuration is used for L Connection VAV zoning systems. There are four different set points: one for cooling, one for ventilation, one for operation during smoke alarm modes, and one for heating. Network commands energize the blower. Blower will cycle with demand unless ECTO 6.17 is set to 1. In that case the blower will operate continuously during occupied periods and will cycle during unoccupied periods. Network commands controls occupied/unoccupied periods.

All delays as described in Local Tstat Mode still apply. Blower speed is controlled by the factory installed VFD between a minimum and maximum speed to maintain duct static pressure set points. There are three different set points, one for cooling, one for ventilation and one for operation during smoke alarm modes. The M2 controls the duct static pressure by reading the duct pressure and varying the blower speed on units with VFDs

The min/max. speed and static pressure set points are listed below:

Oracusticus	Minimum Position		Maxii	Maximum Position		t Static SP
Operation	Default	ECTO	Default	ECTO	Default	ECTO
Cooling	50%	0.06	100%	0.08	1.00"w.c.	0.05
Ventilation	50%	0.06	100%	0.08	1.00"w.c.	0.03
Smoke Alarm Modes	50%	0.06	100%	0.08	1.00"w.c.	0.02
Heating	50%	0.07	100%	0.08	1.00"w.c.	0.04

9.2.8. VAV Staged Units: A Box (3- to 5-ton units)

Energence A Box 3- to 5-ton units use a single, 2-step capacity, compressor. These units use a variable output blower that operates at high or low. (*The 6-ton Energence A Box has a single capacity compressor, and a single speed blower, so it is not an MSAV type of unit, and the following does not apply to it.*)

High efficiency Energence A Box units use a direct-drive ECM constant torque motor. The blower runs at a selected high or low output depending on unit operation. The actual blower speed and CFM delivered will depend on the flow restriction as well as the percent output. The blower output for each mode of operation has been factory set, but it will need to be adjusted based on the installed duct-work and the air delivery required for the application. The table shows the default blower output and the ECTO location where the output value for the each mode is stored. The default blower output selection for smoke mode operation is the same as high speed, but it can be set to a different value using ECTO 0.02.

Standard efficiency Energence A Box unit use a belt-drive 2-speed motor. The blower runs at low or high speed depending on unit operation, but the speed is not ECTO-selectable. High speed blower runs during smoke mode operation. The table also shows, for units equipped with an economizer or motorized outdoor air damper, the damper percent output when the blower is running and the space is occupied. The default value of 101 for ECTO 5.24 is used to indicate that the min position potentiometer on the M2 board is used to set the high-blower damper position. Setting ECTO 5.24 to a value in the range of 0-100 causes this value to be used for the damper minimum position during high blower operation.

High Efficiency Factory Settings (as percent output) - A Box (3- to 5-ton units)								
Operation	3- ton	4- ton	5- ton	ECTO				
Cooling low, Free cooling low, Ventilation low	28	40	36	0.05				
Cooling high, Free cooling high, Ventilation high, Heating	55	80	59	0.04				
Smoke alarm modes	55	80	59	0.02				
Minimum damper during low blower Minimum damper during high blower	30 0.09 101 5.24							

9.2.9. VAV Staged Units: B, C, D, and E Boxes

ECTO 0.01 option 3 (MSAV)

This configuration is a special-case application where the blower speed is staged by the factory installed VFD for fixed speeds for different operation. There are seven different speed stages, one per cooling stage (4), one for ventilation, one for heating and one for operation during smoke alarm modes. Network commands energize the blower which will cycle with demand.

		Staged Speed		
	Operation	⁽¹⁾ Default	ECTO	
h	Cooling compressor 1	51%	0.05	
/	Cooling compressor 2	51%	0.14	
-	Cooling compressor 3	51%	0.15	
, e	Cooling compressor 4	51%	0.16	
e	Ventilation or economizer free cooling	51%	0.03	
Э	Smoke Alarm Modes	51%	0.02	
	Heating	51%	0.04	
	⁽¹⁾ Staged % speed must be adjusted for each operation.			

9.3. VFD Control

	Speed %	Motor Frequency (Hz)	VFD Control Voltage (VDC)
The M2 is only compatible	0	0	0
with the factory installed	10	6	1
variable frequency drives	20	12	2
(VFD) in VAV units used to	30	18	3
control the supply blower and exhaust fan(s). The ana-	40	24	4
log control for the VFDs is	50	30	5
0-10VDC. This manual uses	60	36	6
percent (%) for all blower	70	42	7
and fan speeds. For ex-	80	48	8
ample, 50% blower speed	90	54	9
equals 30Hz equals 5VDC.	100	60	10

9.4. Supply Bypass Damper Control

	Bypass Damper Position (%)	Control Voltage (VDC)
The M2 is only compatible with bypass	0 (closed)	10
damper actuators specified in the En-	10	9.2
gineering Handbook. Specified dampers are used to control the supply	20	8.4
air volume for constant air volume w/by-	30	7.6
pass damper (CAVB) zoning applica-	40	6.8
tions. The analog control for the actuat-	50	6.0
or is a 2-10VDC with 10VDC being fully	60	5.2
closed. This manual uses percent (%)	70	4.4
for bypass damper position. For ex-	80	3.6
ample, 70% bypass damper position	90	2.8
equals 4.4VDC.	100	2.0

9.5. Analog Output Control

The analog outputs on the GP1 boards can be set to closed loop PID or staged control. Most applications such as variable air delivery and variable speed exhaust fans will use the closed loop PID option. The closed loop PID method used by the M2 has four constants, manual reset (ManRS), proportional (P), integral (I) and derivative (D) as shown in figure 19. The PID control constants as well as the output minimum and maximum values, may be adjusted if necessary.

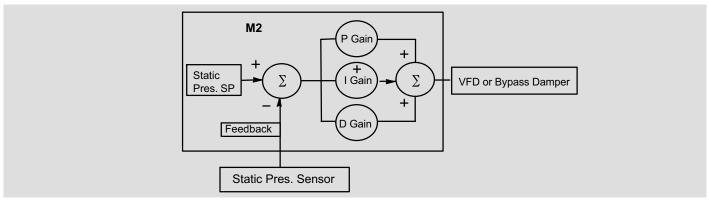


Figure 19. PID Operation Diagram for VAV/CAVB Air Delivery and Exhaust Fan Control

9.5.1. Manual Reset (ManRS)

The output value when the P, I, and D values are all 0. This is the approximate output expected which allows quicker settling at set point. On CAV units with bypass damper, this is also the damper position when blower is off. ManRS can be adjusted between a minimum value and 100%.

9.5.2. Proportional Constant (P)

To handle the present, this is the value of the "gain' that is multiplied times the error. The error is the difference between the output and the set point. A large value of "P" will cause the output to reach the set point faster, however, this faster rate can cause the output to overshoot the set point. On the other hand, a low value of "P" will reduce overshoot, but will cause the output reaction to be too slow. <u>The "P" constant ECTO value can be adjusted between 0–127 with 0 being off and 127 being the highest value.</u>

9.5.3. Integral Constant (I)

To handle the past, this gain is proportional to the amount of time that the error is present. This gain tries to integrate out any offset. A high value of "I" can provide fast correction but can cause overshoot and ringing. The "I' gain should be set to the lowest value possible that corrects the offset. "I" can be adjusted between 0-127 with 127 being the lowest value. <u>The "I" constant ECTO value is inverted. A value of 0 turns the integral factor off. A value of 127 is the minimum and 1 is the maximum.</u>

9.5.4. Derivative Constant (D)

To handle the future, this gain is proportional to the rate of change of the error and provides a damping factor. <u>The "D" con-</u> stant ECTO value can be adjusted between 0- 127 with 0 being off and 127 being the highest value. Most M2 applications do not require using any "D" gain.

9.5.5. Tuning

In the event that the PID loop requires tuning, the following two methods are recommended depending on the severity of the problem:

1. In most cases the parameters will only need a small adjustment. In that case use the following table as a basic guide.

Change Desired	ECTO "P" Parameter	ECTO "I" Parameter	ECTO "D" Parameter
Reduce Response time	Increase	Decrease	Decrease
Reduce Overshoot	Decrease	Increase	Increase
Reduce Settling Time	-	Decrease	Decrease
Reduce Offset (steady state error)	Increase	Decrease	-

2. If method 1 adjustment does not stabilize the system, you may use the following tuning method:

NOTE - To use this method the system must be allowed to operate at the manual reset value (% output) without damaging the system.

A Set the P, I and D constants to 0 (off).

- **B** Start system. Analog output value will be at the ManRS value (%).
- **C** Monitor system. System should be stable. If system is not stable at this point check for other problems. Adjusting the PID parameters will not solve this problem.
- **D** If system is stable, gradually increase the "P" parameter until system starts oscillating (moving above and below set point, continuously).
- E Reduce the "P" parameter to 40-70% of the value set in step 6.
- **F** Gradually start adding some "I" by setting the "I" ECTO parameter to 127 and reduce setting until the steady state error (offset) is reduced to an acceptable level.
- **G** If necessary, increase the "D" parameter to reduce overshoot. Use of "D" can increase settling time and/or lead to instability.
- H NOTE In most cases, it's best to not use any "D" parameter.

	•	Table	30. Sum	mary	of PID C	onstants ECTO Parameters
			Va	riable /	Air Delive	ery PID Constants
No.	Name	Min	Default	Max	Units	Description
0.09	VAV_PID_ManRS	0 0	60 60	100 100	Counts P:%	VAV supply PID manual reset value. If minimum output, ECTO 0.06 or 0.07 is greater, a computed ManRS value is used. See ECTO 0.06 and 0.07.
0.10	PID_P_Constant	0	17	127	Counts	VAV or CAVB supply PID Proportional constant.
0.11	PID_I_Constant	0	12	127	Counts	VAV or CAVB supply PID Integral constant.
0.12	PID_D_Constant	0	0	127	Counts	VAV or CAVB supply PID derivative constant.
			VAV	Exhaus	st Fan Pll	D Control Constants
8.22	Exh_Fan_ManRS	0 0	50 50	100 100	Counts P: %	Exhaust fan PID loop manual reset value.
	Stg_1_Off_Delay	0	100	200	A:Sec.	Stage 1 off-delay. (Only used for 2 stage operation)
8.23	Exh_Fan_PID_P_ Constant	0	20	255	Counts	Exhaust fan PID loop proportional constant. The P constant must be limited to 127. Recommended setting = 17.
	Stg_2_SP	0 0 -0.5	.78 20 42	10.0 100 0.5	R:Volts P:% M:"w.c.	Staged 2 set point.
8.24	Exh_Fan_PID_I_ Constant	0	64	255	Counts	Exhaust fan PID loop integral constant. The I constant must be limited to 127. Recommended setting = 12.
	Stg_2_DB	0 0	64 0.25	100 1.0	P:% L:"w.c.	Staged 2 dead-band.
8.25	Exh_Fan_PID_D_ Constant	0	0	127	Counts	Exhaust fan PID loop derivative constant.
	Stg_2_On_Delay	0	0	254	A: Sec.	Staged 2 on-delay.
9.08	AO1_PID_ManRS	0 0	50 50	100 100	Counts P:%	Analog output channel 1 PID loop manual reset value.
9.09	AO1_PID_P_Constant	0	0	127	Counts	Analog output channel 1 PID loop proportional constant.
9.10	AO1_PID_I_Constant	0	0	127	Counts	Analog output channel 1 PID loop integral constant.
9.11	AO1_PID_D_Constant	0	0	127	Counts	Analog output channel 1 PID loop derivative constant.
	Genera	l Purp	ose PID	Contro	l Constar	nts for GP Analog Output 2 (TB22-12)
9.19	AO2_PID_ManRS	0 0	50 50	100 100	Counts P:%	Analog output channel 2 PID loop manual reset value.
9.20	AO2_PID_P_Constant	0	0	127	Counts	Analog output channel 2 PID loop proportional constant.
9.21	AO2_PID_I_Constant	0	0	127	Counts	Analog output channel 2 PID loop integral constant.
9.22	AO2_PID_D_Constant	0	0	127	Counts	Analog output channel 2 PID loop derivative constant.

10. Discharge Air Control

10.1. Cooling

The discharge air control cooling (DACC) option automatically cycles up to 4 stages of cooling to maintain a discharge air control cooling set point (DACC_SP).

DACC option applies to gas/electric and electric /electric units only; DACC is not allowed with heat pumps units.

When an economizer is installed, adjust free cooling set point ECTO 6.23 approximately 2 degrees lower than DACC set point. This will allow free cooling to operate before DACC energizes compressors.


Refer to figure 20 for DACC cooling stages.


Adjust ECTO 5.04 to option 4 to enable discharge air control cooling.

IMPORTANT - Discharge air sensor RT6 must be moved to the supply air duct, preferably after a 90 degree branch of the main duct.

DACC is initiated by an input in one of three ways:

- 1. Y1 input from an external device—ECTO 6.01 must be set to 0, local thermostat mode.
- 2. Cooling demand while in zone sensor mode—ECTO 6.01 must be set to 1, 2, or 3.
- 3. L Connection network command—ECTO 6.01 must be set to 4, 5, 6 or 7.

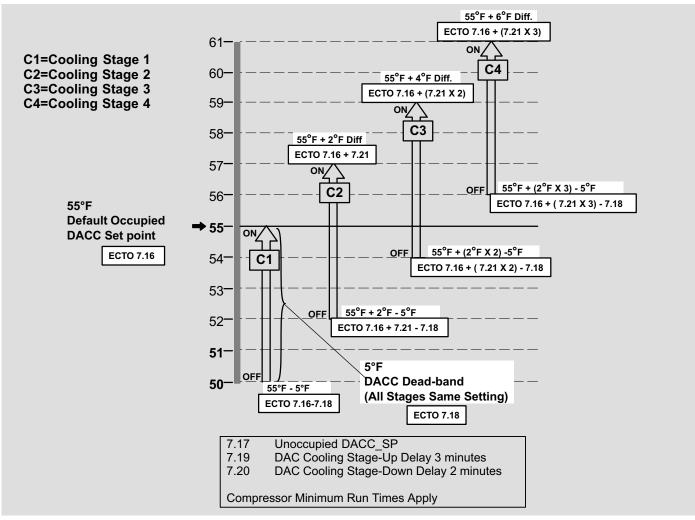



10.2. Outdoor Air Reset

IMPORTANT - Outdoor air reset can be used to adjust the free cooling set point (ECTO 6.23) when DACC is not used. All references to the DACC set point apply to the free cooling set point.

The DACC and free cooling set point can be automatically reset when outdoor air temperature becomes cooler. Use ECTO 8.07 to enable Outdoor Air Reset.

For outdoor air based DACC set point reset, the discharge air cooling set point starts to increase when the outdoor air temperature (OAT) drops to the DACC_OAT_RS_SP (ECTO 8.05) (default 80°F). The reset set point will continue to increase at the rate equal to the DACC_OAT_RS_Adjustment_Band (ECTO 8.07) divided by the DACC_OAT_RS_Proportional_Band (ECTO 8.06). See the following example:

EXAMPLE: The application calls for the discharge air cooling occupied set point (DACC_OCP_SP) (ECTO 7.16) to be 55°F when OAT is 80°F or higher. When the OAT drops below 80°F, the set point needs to increase proportionately with the OAT decrease (maximum set point increase of 10°F). The 10°F OAT decrease is called the DACC_OAT_RS_ Proportional_Band and the set point increase of 10°F is called the DACC_OAT_RS_ Adjustment_Band. See figure 21.

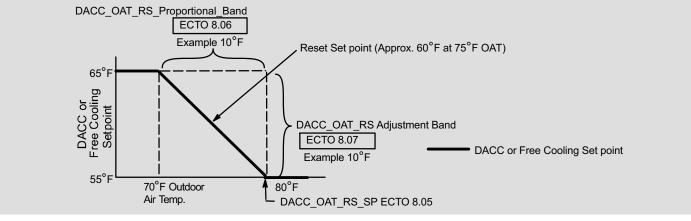


Figure 21. Outdoor Air Reset Example

To use example values, set the following parameters:

- ECTO 8.05 DACC OAT RS SP Set to 80°F
- ECTO 8.06 DACC OAT RS Proportional Band Set to 10°F
- ECTO 8.07 DACC OAT RS Adjustment Band -- Set to 10°F (this setting enables DACC outdoor air reset.

10.3. Return Air Reset

IMPORTANT - Return air reset can be used to adjust the free cooling set point (ECTO 6.23) when DACC is not used. All references to the DACC set point apply to the free cooling set point.

The DACC and free cooling set point can be automatically reset when return air temperature becomes cooler. Use ECTO 8.04 to enable Return Air Reset.

For return air based DACC set point reset, the discharge air cooling set point starts to increase when the return air temperature (RAT) drops to the DACC_RAT_RS_SP (ECTO 8.02) (default 70°F). The reset set point will continue to increase at the rate equal to the DACC_RAT_RS_Adjustment_Band (ECTO 8.04) divided by the DACC_RAT_RS_Proportional_Band (ECTO 8.03). See the following example:

EXAMPLE: The application calls for the discharge air occupied set point (DACC_OCP_SP) (ECTO 7.16) to be 55°F when RAT is 70°F or higher. When the RAT drops below 70°F, the set point needs to increase proportionately with the OAT decrease (maximum set point increase of 10°F). The 10°F RAT difference is called the DACC_RAT_RS_ Proportional_Band and the set point increase of 10°F is called the DACC_RAT_RS_ Adjustment_Band. See figure 22.

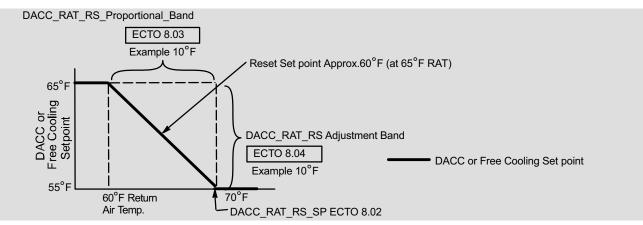


Figure 22. Return Air Reset Example

To use example values, set the following parameters:

- ECTO 8.02 DACC_RAT_RS_SP Set to 70°F
- ECTO 8.03 DACC_RAT_RS_Proportional_Band Set to 10°F
- ECTO 8.04 DACC_ RAT_ RS_Adjustment_Band Set to 10°F (this setting enables DACC return air reset).

10.4. Discharge Air Cooling Total Reset Limit

ECTO 8.01 (default=10) defines the total DACC set point reset limit. This total limit is the sum of both return and outdoor DACC resets. This parameter limits total DACC_SP adjustment band and overrides the adjustment bands for RAT and OAT (ECTO 8.07 & 8.04) if necessary.

		Tab	le 31. Di	schar	ge Air C	ooling ECTO Parameters Summary
Control Parameter Control Value						
No.	Name	Min.	Default	Max	Units	Description
5.04	CL_Staging	0	2	4	Option	 Cooling staging options: 0- No cooling operation 1- Basic Tstat operation. Two cooling stages. Units with Economizers Y1=Free Cooling, Y2=adds all mechanical stages. 2- Basic Tstat operation. Two cooling stages. Units with Economizers Y1=Free Cooling, Y2=adds first stage of mechanical. 3- Basic Tstat operation. Three cooling stages. Y1 only = first stage, Y2 only = second stage, Y1+Y2=third stage. Units with Economizers Y2 only adds first stage of mechanical, Y1+Y2 adds first and second stage of mechanical. 4- Discharge air control. Up to four stages.
						System mode of operation.
6.01	System_Mode	0	0	12	Option	ControlValueSystem ModeBackup Mode0Local ThermostatNone1Zone SensorNone2Zone SensorLocal Thermostat3Zone SensorReturn Air Sensor4Remote DemandNone5Remote DemandLocal Thermostat6Remote DemandZone Sensor7Remote DemandZone Sensor8Future UseNone9Future UseLocal Thermostat10Future UseReturn Air Sensor11Future UseZone Sensor12A138 4-Stg. Tstat InterfaceNone
7.16	DACC_OCP_SP	124 80	161 55	183 40	Counts	Discharge Air Control Cooling set point during occupied period.
7.17	DACC_ UnOCP_SP	124 80	146 65	183 40	Counts X:DegF	Discharge Air Control Cooling set point during unoccupied period.
7.18	DACC_Stg_DB	7 5	7 5	30 20	Counts V:DegF	Discharge Air Control Cooling stage dead-band.
7.19	DACC_&_FAC_ StgUp_Delay	0 0	45 180	225 900	Counts B: Sec.	Discharge Air Control Cooling and Fresh Air Cooling stage-up delay.
7.20	DACC_&_FAC_ StgDn_Delay	0 0	30 120	150 600	Counts B: Sec.	Discharge Air Control Cooling and Fresh Air Cooling stage-down time delay.
7.21	DACC_Stg_Diff	3 2	3 2	30 20	Counts V:DegF	Discharge Air Cooling stage differential.
8.01	DACC_RS_ Total_LT	7 5	15 10	29 20	Counts V:DegF	Discharge Air Control Cooling total reset limit. This limits the total DACC reset allowed. Also used to reset free cooling set point (6.23).
8.02	DACC_RAT_RS _SP	124 80	139 70	169 50	Counts X:DegF	Discharge Air Control Cooling return air reset set point. Also used to reset free cooling set point (6.23).
8.03	DACC_RAT_ RS_Proportion- al_Band.	1 1	15 10	44 30	Counts V:DegF	Discharge Air Control Cooling return air reset proportional band. Also used to reset free cooling set point (6.23).
8.04	DACC_RAT_ RS_ Adjust_ Band	0 0	0 0	44 30	Counts V:DegF	Discharge Air Control Cooling return air reset adjustment band. 0 disables return air cooling reset. Also used to reset free cooling set point (6.23).
8.05	DACC_OAT_ RS_SP	50 100	81 80	144 40	Counts Y:DegF	Discharge Air Control Cooling outdoor air temperature cooling reset set point. Also used to reset free cooling set point (6.23).

Con	Control Parameter Control Value					
No.	Name	Min. Default Max		Units	Description	
8.06	DACC_OAT_ RS_ Proportion- al_ Band.	1 1	31 20	94 60	Counts O:DegF	Discharge Air Control Cooling outdoor ambient temperature cooling proportional band. Also used to reset free cooling set point (6.23).
8.07	DACC_OAT_ RS_Adjust_ Band	0 0	0 0	47 30	Counts O:DegF	Discharge Air Control Cooling outdoor temperature ambient cooling adjustment reset band. 0 disables outdoor air cooling reset. Also used to reset free cooling set point (6.23).

10.5. Heating

The discharge air control heating (DACH) option automatically cycles up to 4 stages of heating to maintain a discharge air control heating set point (DACH_SP).


DACH option applies to gas/electric and electric /electric units only; DACH is not allowed with heat pumps units. Refer to figure 23 for DACH heating stages.


Adjust ECTO 5.09 to option 1 to enable discharge air control.

IMPORTANT - Discharge air sensor RT6 must be moved to the supply air duct, preferably after a 90 degree branch off of the main duct.

DACH is initiated by an input in one of three ways:

- 1. W1 input from an external device—ECTO 6.01 must be set to 0, local thermostat mode.
- 2. Heating demand while in zone sensor mode—ECTO 6.01 must be set to 1, 2, or 3.
- 3. L Connection network command—ECTO 6.01 must be set to 4, 5, 6 or 7.

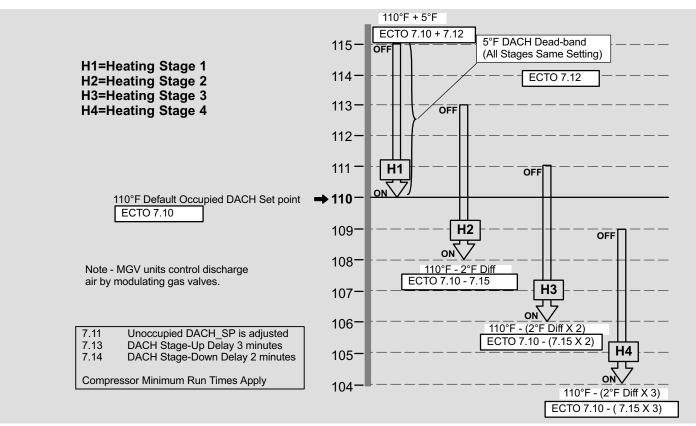



10.6. Outdoor Air Reset

The DACH set point can be automatically reset when outdoor air temperature becomes warmer.

For outdoor air based DACH set point reset, the discharge air control heating set point starts to decrease when the outdoor air temperature (OAT) rises to the DACH_OAT_RS_SP (ECTO 8.12) (default 40°F). The reset set point will continue to decrease at the rate equal to the DACH_OAT_RS_Adjustment_Band (ECTO 8.14) divided by the DACH_OAT_RS_Proportional_Band (ECTO 8.13). See the following example:

EXAMPLE: The application calls for the discharge air control heating occupied set point (DACC_OCP_SP) (ECTO 7.10) to be 110°F when OAT is 40°F or lower. When the OAT rises above 40°F, the set point needs to decrease proportionately with the OAT increase (maximum set point increase of 10°F). The 10°F OAT decrease is called the DACH_OAT_RS_ Proportional_Band and the set point decrease of 10°F is called the DACC_OAT_RS_ Adjustment_Band. See figure 24.

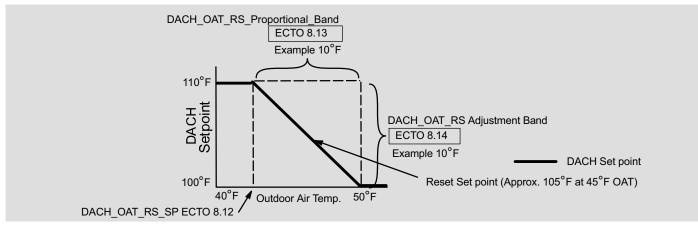


Figure 24. Outdoor Air Reset Example

To use example values, set the following parameters:

- ECTO 8.12 DACH OAT RS SP Set to 40°F
- ECTO 8.13 DACH OAT RS Proportional Band Set to 10°F
- ECTO 8.14 DACH OAT RS Adjustment Band -- Set to 10°F (this setting enables DACH outdoor air reset).

10.7. Return Air Reset

The DACC set point can be automatically reset when return air temperature becomes warmer.

For return air based DACH set point reset, the discharge air control heating set point starts to decrease when the return air temperature (RAT) rises to the DACH_RAT_RS_SP (ECTO 8.09) (default 70°F). The reset set point will continue to decrease at the rate equal to the DACH_RAT_RS_Adjustment_Band (ECTO 8.11) divided by the DACH_RAT_RS_Proportional_Band (ECTO 8.10). See the following example:

EXAMPLE: The application calls for the discharge air control heating occupied set point (DACH_OCP_SP) (ECTO 7.10) to be 110°F when RAT is 70°F or lower. When the RAT increases above 70°F, the set point needs to decrease proportionately with the RAT increase (maximum set point increase of 10°F). The 10°F RAT difference is called the DACH_RAT_RS_ Proportional_Band and the set point increase of 10°F is called the DACC_RAT_RS_Adjust-ment_Band. See figure 25.

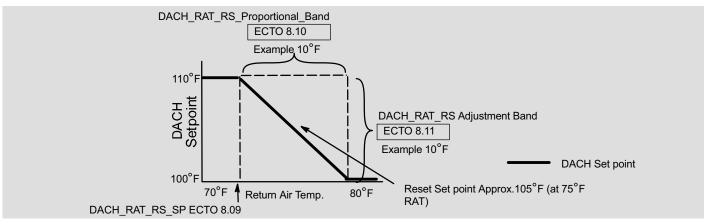


Figure 25. Return Air Reset Example

To use example values, set the following parameters:

- ECTO 8.09 DACH_RAT_RS_SP Set to 70°F
- ECTO 8.10 DACH_RAT_RS_Proportional_Band Set to 10°F
- ECTO 8.11 DACH_ RAT_ RS_Adjustment_Band Set to 10°F (this setting enables DACH return air reset).

10.8. Discharge Air Control Heating Total Reset Limit

ECTO 8.08 (default=10) defines the total DACH set point reset limit. This total limit is the sum of both return and outdoor DACH resets. This parameter limits total DACH_SP adjustment band and overrides the adjustment bands for RAT and OAT (ECTO 8.11 & 8.14) if necessary.

					ge Air He	eating ECTO Parameters Summary			
Con	trol Parameter	C	ontrol Valu	le					
No.	Name	Min.	Default	Max	Units	Description			
5.09	HT_Staging	0	2	2	Option	Heating staging options: 0- No heating operation. 1- Discharge air control with up to 4 stages. 2- Thermostat operation.			
6.01	System_Mode	0	0	12	Option	System mode of operation.ControlBackup ModeValueSystem ModeBackup Mode0Local ThermostatNone1Zone SensorNone2Zone SensorLocal Thermostat3Zone SensorReturn Air Sensor4Remote DemandNone5Remote DemandLocal Thermostat6Remote DemandReturn Air Sensor7Remote DemandZone Sensor8Future UseNone9Future UseLocal Thermostat10Future UseReturn Air Sensor11Future UseZone Sensor12A138 4-Stg. Tstat InterfaceNone			
7.10	DACH_OCP _SP	36 140	80 110	124 80	Counts X:DegF	Discharge Air Control Heating set point during occupied period.			
7.11	DACH_UnOCP _SP	36 140	95 100	124 80	Counts X:DegF	Discharge Air Control Heating set point during unoccupied period.			
7.12	DACH_Stg_DB	7 5	7 5	30 20	Counts V:DegF	Discharge Air Control Heating dead-band.			
7.13	DACH_&_FAH_ StgUp_Delay	0 0	45 180	225 900	Counts B: Sec.	Discharge Air Control Heating and Fresh Air Heating stage-up time delay.			
7.14	DACH_&_FAH_ StgDn_Delay	0 0	30 120	150 600	Counts B: Sec.	Discharge Air Control Heating and Fresh Air Heating stage-down time delay.			
7.15	DACH_Stg_ Diff	3 2	3 2	30 20	Counts V:DegF	Discharge Air Control Heating stage differential			
8.08	DACH_RS_ Limit	7 5	15 10	29 20	Counts V:DegF	Discharge Air Control Heating reset limit. This limits the total DACH reset al- lowed.			
8.09	DACH_RAT_ RS_SP.	124 80	139 70	169 50	Counts X:DegF	Discharge Air Control Heating return air heating reset set point.			
8.10	DACH_RAT_ RS_Proportion- al_Band	1 1	15 10	44 30	Counts V:DegF	Discharge Air Control Heating return air heating reset proportional band.			
8.11	DACH_RAT_ RS_Adjust_ Band	0 0	0 0	44 30	Counts V:DegF	Discharge Air Control Heating return reset adjustment band. 0 value disables return air heating reset.			
8.12	DACH_OAT_ RS_SP	113 60	144 40	255 -31	Counts Y:DegF	Discharge Air Control Heating outdoor temperature reset set point.			
8.13	DACH_OAT_R S_Proportional_ Band.	1 1	31 20	94 60	Counts O:DegF	Discharge Air Control Heating temperature reset proportional band.			
8.14	DACH_OAT_R S_Adjust_ Band	0 0	0 0	47 30	Counts O:DegF	Discharge Air Control Heating outdoor temperature reset adjustment band. 0 disables outdoor temperature heating reset			

11. Third-Party Zoning

The M2 has many features which allow easy interface with third-party VAV or bypass damper changeover zoning systems. See Figure 26 for a VAV unit wiring summary and figure 27 for a CAV unit w/CAVB wiring summary.

In addition to providing VFD control (VAV units) and bypass damper control (CAV units), the M2 provides discharge air control for cooling and/or heating. More options are available which control single-stage, two-stage, or modulating power exhaust fans.

Only 4 digital inputs are required to control the rooftop unit for third-party zoning applications: G (blower enable), OCP (occupied), Y1 (enables discharge cooling) and W1 (enables discharge heating).

11.1. Air Delivery Operation

When a G signal is energized, the M2 will control a VFD or bypass damper to hold a constant supply duct static pressure. The M2 uses a pressure sensor input and a PID control loop to maintain duct static pressure. For increased flexibility, the M2 has separate adjustable static pressure set points for ventilation, cooling, heating and smoke alarms.

11.2. Occupied /Unoccupied Operation

When the OCP signal is energized, the M2 will adjust the fresh air damper to a fixed minimum position or a modulating position (based on a CO_2 or outdoor air control sensor). Also during morning warm-up/cool-down the M2 will keep the damper closed based on the settings selected.

11.3. Cooling Operation

When a Y1 signal is energized the M2 will control up to 4 stages of cooling (depending RTU size) to automatically maintain a constant discharge air cooling temperature. The M2 also has advanced discharge air cooling reset options based on return air temperature and/or outside air temperature.

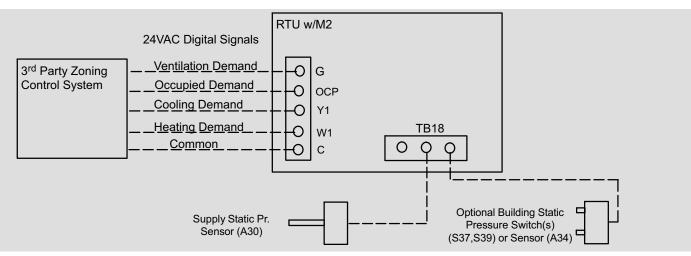


Figure 26. Field Wiring Summary for VAV Unit with Supply Air VFD

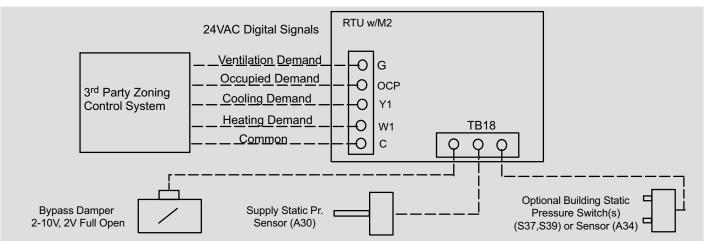


Figure 27. Field Wiring Summary for CAV Unit with Bypass Damper

11.4. DACC Outdoor Air Reset

The outside air reset saves energy by gradually increasing the discharge air set point as the outside air temperature decreases.

11.5. DACC Return Air Reset

The return air reset reduces the possibility of over-cooling by gradually increasing the discharge air set point as the return air temperature decreases. Over-cooling may occur if the zoning system is misapplied, has an abnormal condition, or a dominant zone.

11.6. Heating Operation

When a W1 signal is energized, the M2 will control up to 4 stages of heating (depending on RTU size) to automatically maintain a constant discharge air heating temperature. The M2 also has advanced discharge air heating reset options based on return air temperature and/or outside air temperature.

11.7. DACH Outdoor Air Reset

The outside air reset saves energy by gradually decreasing the discharge air set point as the outside air temperature increases.

11.8. DACH Return Air Reset

The return air reset reduces the possibility of overheating by gradually decreasing the discharge air set point as the return air temperature increases. Overheating may occur if the zoning system is miss-applied, has an abnormal condition, or dominant zone.

11.9. Power Exhaust Operation

The M2 has many power exhaust fan control options that include single-stage, two-stage and modulating control depending on how the unit is equipped. The stage control options can be triggered based on fresh air damper position, pressure switches or pressure analog sensor. The modulating control for units with VFD powered exhaust fans are typically modulated to maintain building static pressure, but can also be staged. See Power Exhaust Section.

11.10. VAV and CAVB Analog Outputs

Refer to the Supply Air Delivery section and the optional Power Exhaust Fan section.

11.10.1. VFD Control

The M2 is only compatible with the factory-installed variable frequency drives (VFD) provided in VAV units. The VFD is used to control the supply blower and exhaust fan(s). The analog control for the VFDs is 0-10Vdc. This manual uses percent (%) to indicate blower and fan speeds. For example, 50% blower speed is equal to 30Hz and 5Vdc.

Speed %	Motor Frequency (Hz)	VFD Control Voltage (VDC)	Speed %	Motor Frequency (Hz)	VFD Control Voltage (VDC)
0	0	0	60	36	6
10	6	1	70	42	7
20	12	2	80	48	8
30	18	3	90	54	9
40	24	4	100	60	10
50	30	5			

11.10.2. Supply Bypass Damper Control

The M2 is only compatible with bypass damper actuators specified in the Engineering Handbook. The actuators control the supply air volume for constant air volume units equipped with a bypass damper (CAVB) in zoning applications. The analog control for the actuator is 2-10Vdc. Dampers are closed at 10Vdc and fully open at 2Vdc. This manual uses percent (%) to indicate bypass damper position. For example, 70% bypass damper position is equal to 4.4Vdc.

Bypass Damper Position (%)	Control Voltage (VDC)						
0 (closed)	10	30	7.6	60	5.2	90	2.8
10	9.2	40	6.8	70	4.4	100	2.0
20	8.4	50	6.0	80	3.6		

Table 33. Air Delivery Setup for CAV w/Bypass for Changeover Zoning Applications

ECTO No.	Name	Default Setting	Setting Required	Description		
0.01	Supply_VAV_ Control_Mode	0	1	Sets PID control of bypass damper for all modes, ventilation, cooling, heating and smoke alarms.		
0.10	PID_P_ Constant	17	Select (Recommend default)	PID Proportional constant		
0.11	PID_I_Constant	12	Select (Recommend default)	PID Integral constant		
0.12	PID_D_ Constant	0	Select (Recommend default)	PID derivative constant		
0.13	CAVB_SMK_SP	1.00"w.c.	Select 0-5"w.c.	Supply static pressure set point during smoke alarm. Typically 1 to 1.5"w.c.		
0.14	CAVB_Vent_SP	1.00"w.c.	Select 0-5"w.c.	Supply static pressure set point during ventilation only. Typically 1 to 1.5"w.c.		
0.15	CAVB_HT_SP	1.00"w.c.	Select 0-5"w.c.	Supply static pressure set point during heating. Typically 1 to 1.5"w.c.		
0.16	CAVB_CL_SP	1.00"w.c.	Select 0-5"w.c.	Supply static pressure set point during cooling. Typically 1 to 1.5"w.c.		
0.17	CAVB_Min_ Output_for SMK_Vent_CL	20%	Select 20-100% (Recommend default)	Minimum output to bypass damper during smoke alarm, ventilation only and cooling. Sets minimum air delivered. Bypass damper motor is set to 10 to 2 volts with 10 v being closed.		
0.18	CAVB_Min_ Output_ for HT	20%	Select 20-100% (Recommend de- fault)	Minimum output to bypass damper during heating. Sets minimum delivered.		
0.19	CAVB_Max_ Output	100%	Select 20-100% (Recommend default)	Maximum output to bypass damper for all modes. Sets the maximum air de- livered.		
0.20	CAVB_ManRS	52%	Select 20-100% (Recommend default)	Bypass damper manual reset value output. Output when blower is off.		
0.21	Supply_Static_ Shutdown_ SP	2.0"w.c.	Select 0-5.0"w.c.	Supply static shutdown set point. Unit will shutdown for ECTO 5.02 minutes if duct pressure exceeds this value for 20 seconds		
0.22	Supply_Static_ Lockout_Counts	3	Select 0-5 counts (Recom- mend default)	The number of occurrences before permanent lockout. Counter resets when M2 resets. A value of 0 will disable lockout.		
		Air I	Delivery Setup Fo	or VAV Zoning Applications		
0.01	Supply_VAV_ Control Mode	0	63	Sets PID control of VFD all modes, ventilation, cooling, heating and smoke alarms.		
0.02	VAV_Press_SMK_ SP	1.00"w.c.	Select 0-5 "w.c.	VAV supply static pressure set point during smoke detection.		
0.03	VAV_Press_Vent_ SP	1.00"w.c.	Select 0-5 "w.c.	VAV supply static pressure set point during ventilation.		
0.04	VAV_Press_HT_SP	1.00"w.c.	Select 0-5 "w.c.	VAV supply static pressure set point during heating.		
0.05	VAV_Press_CL_SP	1.00"w.c.	Select 0-5 "w.c.	VAV supply static pressure set point during cooling.		
0.06	VAV_Min_ Output_for_ CL_VT_ SMK.	50%	Select 30-100%	Supply minimum speed for cooling, ventilation or smoke. If minimum is >= manual reset (ECTO 0.09), then manual reset used is shif- ted to (ECTO 0.07 + ECTO 0.08) / 2		
0.07	VAV_Min_ Output_for_HT	50%	Select 30-100%	Supply minimum speed for heating. If minimum is >= manual reset (ECTO 0.09), then manual reset used is shif- ted to (ECTO 0.06 + ECTO 0.08) / 2		
0.08	VAV_Max_ Output	100%	Select 0-100% 0-100%	Supply maximum output.		
0.09	VAV_PID_ManRS	60%	Select 0-100% (Recommend default)	Supply PID manual reset value.		

ECTO No.	Name	Default Setting	Setting Required	Description
		Air Delive	ry Setup For VAV	Zoning Applications - continued
ECTO No.	Name	Default Setting	Setting Required	Description
0.10	PID_P_ Constant	17	Select (Recommend default)	PID Proportional constant
0.11	PID_I_Constant	12	Select (Recommend default)	PID Integral constant
0.12	PID_D_Constant	0	Select (Recommend default)	PID derivative constant
0.21	Static_ Shutdown_SP	2.0"w.c.	Select 0-5"w.c.	Supply static shutdown set point. Unit will shutdown for ECTO 5.02 minutes if duct pressure exceeds this value for 20 seconds.
0.22	Static_Lock- out_Counts	3	Select 0-3 (Recom- mend default)	The number of occurrences before permanent lockout. Counter resets when M2 resets. A value of 0 will disable lockout.
			Discharge Air Co	ntrol Setup for Cooling
5.04	CL_Stg_Option	2	4	Option 4 sets control to operate discharge air control cooling when Y1 is ener- gized.
7.16	DACC_OCP_SP	55F	Select 40-80F	Discharge Air Control Cooling set point during occupied period.
7.17	DACC_UnOCP_SP	65F	Select 40-80F	Discharge Air Control Cooling set point during unoccupied period.
7.18	DACC_Stg_DB	5F	Select 5-20F	Discharge Air Control Cooling stage dead-band.
7.19	DACC_&_FAC_ StgUp_Delay	180Sec.	Select 0-900 Sec (Recommend de- fault)	Discharge Air Control Cooling and Fresh Air Cooling stage-up delay.
7.20	DAC_&_FAC_Stg- Dn_Delay	120Sec.	Select 0-600Sec. (Recommend de- fault)	Discharge Air Control Cooling and Fresh Air Cooling stage-down time delay.
7.21	DACC_Stg_Diff	2F	Select 2-20F (Recommend de- fault)	Discharge Air Cooling stage differential.
8.01	DACC_RS_Limit	10F	Select 5-20F (Recommend de- fault)	Discharge Air Control Cooling total reset limit. This limits the total DACC reset allowed.
8.02	DACC_RAT_RS_SP	70F	Select 50-80F	Discharge Air Control Cooling return air reset set point
8.03	DACC_RAT_RS_ Proportional_Band	10F	Select 1-30F	Discharge Air Control Cooling return air reset proportional band.
8.04	DACC_RAT_RS_ Adjust_Band	0F (dis- abled)	Select 0-30F	Discharge Air Control Cooling return air reset adjustment band. 0 disables return air cooling reset.
8.05	DACC_OAT_ RS_SP	80F	Select 40-100F	Discharge Air Control Cooling outdoor air temperature cooling reset set point.
8.06	DACC_OAT_RS_ Proportional_ Band.	20F	Select 1-60F	Discharge Air Control Cooling outdoor ambient temperature cooling propor- tional band.
8.07	DACC_OAT_RS_ Adjust_Band	0F (disabled)	Select 0-30F	Discharge Air Control Cooling outdoor temperature ambient cooling adjust- ment reset band. 0 disables outdoor air cooling reset

ECTO No.	Name	Default Setting	Setting Required	Description
			Discharge Air Co	ontrol Setup for Heating
5.09	HT_Staging	2	1	Option 1 sets control to operate discharge air control heating when W1 is energized.
7.10	DACH_OCP_SP	110	Select 80-140F	Discharge Air Control Heating set point during occupied period.
7.11	DACH_UnOCP_SP	100	Select 80-140F	Discharge Air Control Heating set point during unoccupied period.
7.12	DACH_Stg_DB	5F	Select 5-20F (Recommend default)	Discharge Air Control Heating dead-band.
7.13	DACH_&_FAC_ StgUp_Delay	180 Sec.	Select 0-900Sec. (Recommend default)	Discharge Air Control Heating and Fresh Air Heating stage-up time delay.
	·		Discharge Air Co	ontrol Setup for Heating
ECTO No.	Name	Default Setting	Setting Required	Description
7.14	DACH_&_FAC_ SgDn_Delay	120 Sec.	Select 0-600Sec. (Recommend default)	Discharge Air Control Heating and Fresh Air Heating stage-down time delay.
7.15	DACH_Stg_Diff	2F	Select 2-20F (Recommend default)	Discharge Air Control Heating stage differential
8.08	DACH_RS_Limit	10F	Select 5-20F. (Re- commend default)	Discharge Air Control Heating reset limit. This limits the total DACH reset allowed.
8.09	DACH_RAT_RS_SP	70F	Select 50-80F.	Discharge Air Control Heating return air heating reset set point.
8.10	DACH_RAT_RS_ Proportional_ Band.	10F	Select 1-30F.	Discharge Air Control Heating return air heating reset proportional band.
8.11	DACH_RAT_RS_ Adjust_Band	0F (disabled)	Select 0-30F.	Discharge Air Control Heating return reset adjustment band. 0 value disables return air heating reset.
8.12	DACH_OAT_RS_SP	40F	Select -31-60F.	Discharge Air Control Heating outdoor temperature reset set point.
8.13	DACH_OAT_RS_ Proportional_ Band.	20F	Select 1-60F.	Discharge Air Control Heating temperature reset proportional band.
8.14	DACH_OAT_RS_ Adjust_Band	0F (dis- abled)	Select 0-30F.	Discharge Air Control Heating outdoor temperature reset adjustment band. 0 disables outdoor temperature heating reset

ECTO No.	Name	Default Setting	Setting Required	Description
			Power	Exhaust Setup
8.16	Exh_Fan_ Control	0	Select depending on type of exhaust fan.	Single stage (controlled by A55_P265-2 output)ModeEnableInput0-BlowerD_POS1-AlwaysA133_P149-12-OCPA133_P194-13-BlowerA133_P194-14-AlwaysA133_P194-75-OccupiedA133_P194-76-BlowerA133_P194-77-A133_P194-1A133_P194-77-A133_P194-1A133_P194-77-A133_P194-1A133_P194-77-A133_P194-1A133_P194-77-A133_P194-1A133_P194-20-OccupiedA133_P194-110-OccupiedA133_P194-111-BlowerA133_P194-712-AlwaysA133_P194-713-OccupiedA133_P194-713-OccupiedA133_P194-713-OccupiedA133_P194-713-OccupiedA133_P194-714-BlowerA133_P194-715-A133_P194-1A133_P194-715-A133_P194-1A133_P194-715-A133_P194-7A133_P194-715-A133_P194-7A133_P194-716-AlwaysA133_P194-716-AlwaysA133_P194-717-OccupiedA133_P194-718-BlowerA133_P194-719-A133_P194-7A133_P194-718-BlowerA133_P194-719-A133_P194-719-A133_P194-718-BlowerA133_P194-7
				A55_P265-2 and speed controlled by VFD) Mode Enable Analog Input 20 Always A133_P194-7 21 Occupied A133_P194-7 22 Blower A133_P194-7 23 A133_P194-1 A133_P194-7 Always on at least minimum speed when enabled. Speed set point for stage 1 exhaust fan when using a VFD for controlling
8.17	Exh_Fan_Stg_1_ SP	50%	Select 0-100%	exhaust fan in staged mode.
8.18	Exh_Fan_Stg_2_SP	100%	Select 0-100%	Speed set point for stage 2 exhaust fan when using a VFD for controlling exhaust fan in staged mode.
8.19	Exh_Fan_SP_ for _SMK	-0.3"w.c.	Select -0.5 – 0.5"w.c.	Exhaust fan smoke mode set point for PID option control Staged set point for during smoke alarm.
	Staged_SMK	50%	0-100% Select -0.5 –	Value used depends on smoke mode (ECTO 5.01)
8.20	Exh_Fan_SP	-0.3"w.c.	0.5"w.c.	Exhaust fan set point for PID option control
	Stage_1_SP Exh_Fan_Min.	50% 10%	0-100%	Stage 1 set point
0.01		10%	Select 0-100% 0-1.0"w.c.	Exhaust fan minimum speed
8.21		0.04	1 11-11 11:34/ C	Staged 1 dead-band.
	Staged_ 1_DB	0.04		Exhaust fan PID loop manual reset value
8.21	Staged_1_DB Exh_Fan_ManRS	10%	Select 0-100%	·
8.22	Staged_1_DB Exh_Fan_ManRS Stg_1_Off_Delay Exh_Fan_PID_P		Select 0-100% 0-200 Sec. Select	Stage 1 off-delay.
	Staged_1_DB Exh_Fan_ManRS Stg_1_Off_Delay Exh_Fan_PID_P _Constant	10% 100 Sec. 20 Counts	Select 0-100% 0-200 Sec. Select 0-255Counts	Stage 1 off-delay. Exhaust fan PID loop proportional constant
8.22	Staged_1_DB Exh_Fan_ManRS Stg_1_Off_Delay Exh_Fan_PID_P _Constant Stg_2_SP Exh_Fan_PID_	10% 100 Sec.	Select 0-100% 0-200 Sec. Select 0-255Counts -0.5 -0.5"w.c. Select	Stage 1 off-delay.
8.22	Staged_1_DB Exh_Fan_ManRS Stg_1_Off_Delay Exh_Fan_PID_P _Constant Stg_2_SP Exh_Fan_PID_ I_Constant	10% 100 Sec. 20 Counts "w.c. 64 Counts	Select 0-100% 0-200 Sec. Select 0-255Counts -0.5 -0.5"w.c. Select 0-255 Counts	Stage 1 off-delay. Exhaust fan PID loop proportional constant Staged 2 set point. Exhaust fan PID loop integral constant
8.22	Staged_1_DB Exh_Fan_ManRS Stg_1_Off_Delay Exh_Fan_PID_P _Constant Stg_2_SP Exh_Fan_PID_	10% 100 Sec. 20 Counts "w.c.	Select 0-100% 0-200 Sec. Select 0-255Counts -0.5 -0.5"w.c. Select	Stage 1 off-delay. Exhaust fan PID loop proportional constant Staged 2 set point.

11.11. M2 LonTalk[®] Module

The optional M2 LonTalk[®] module allows communication between the Lennox M2 and a LonWorks[®] network. The module translates input and output variables between the Lennox protocol and the LonTalk protocol. The M2 LonTalk module has been developed to communicate with building automation systems that support the LonMark[®] Space Comfort Control (SCC) or Discharge Air Control (DAC) functional profiles. A Lennox non-communicating zone sensor or a LonTalk network zone sensor may be used to send the zone temperature to the M2. Use of a LonTalk thermostat to send direct heating and cooling demands is not supported at this time.

NOTE - A qualified systems integrator with adequate training and experience is required to integrate and commission the M2 LonTalk module into a third-party LonTalk building automation system. A LonWorks network configuration software tool such as LonMaker® (or equivalent) is required to commission the LonWorks network. An external interface file (XIF) will be made available upon request.

Refer to the Installation Instructions for the M2 LonTalk module for installation. Refer to the Service Literature for the M2 LonTalk module for data point and programming information.

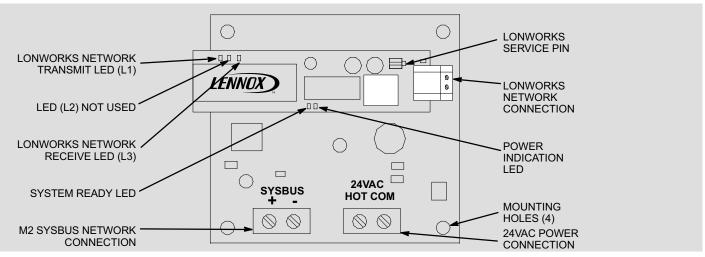


Figure 28. M2 LonTalk Module

12. BACnet®

12.1. M2 BACnet[™] Module

The optional M2 BACnet Module allows communication between the Lennox M2 (M2, version 6.00 and higher) and a BACnet MSTP network. The BACnet module conforms to the BACnet application specific controller (B-ASC) device profile. A Lennox non-communicating zone sensor, a BACnet network zone sensor, or a BACnet thermostat may be used to send the zone temperature or thermostat demands to the M2.

NOTE - A qualified systems integrator with adequate training and experience is required to integrate and commission the M2 BACnet into a third-party BACnet Building Automation System. A BACnet network configuration software tool is required to commission the BACnet network.

Refer to the Installation Instructions for the M2 BACnet Module for installation. Refer to the Service Literature for the M2 BACnet Module for data point and programming information.

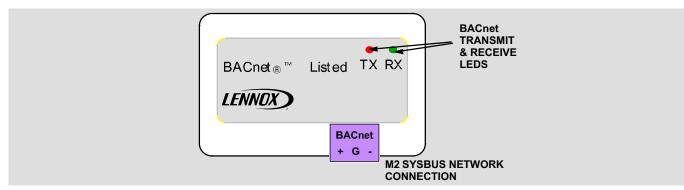


Figure 29. M2 BACnet Module

12.2. Recommendations

- 1. Set all BACnet devices on an MS/TP network to consecutive MAC addresses, starting at 1, so that there are no gaps between MAC address values.
- Set Max_Master device property on all devices to match the largest MAC address on the network. Note, this could be larger than existing network to allow for adding devices to the network with out the need to adjust the Max_Master property.
- 3. Use ReadPropertyMultiple service instead of ReadProperty service when reading multiple analog inputs or values

12.3. Default Settings

device Max_Master = 127 device Max_Info_Frames = 1 device Object_Identifier = MAC address device Object_Name = "Lennox_M2" + MAC address device Location = "US" device Description = "Lennox HVAC Controller" baud rate = 38.4k

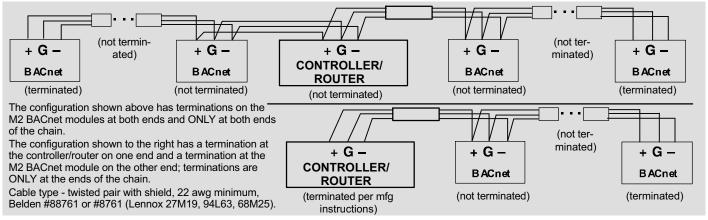


Figure 30. Terminating ends of daisy-chained networks

12.4. Analog Output Objects

Optional Properties Supported:

Min_Pres_Value, Max_Pres_Value

Optional Writable Properties: Out_Of_Service

Analog output object's Overridden status flag set if the equivalent set point in the M2 is written to by an Sbus device.

Object ID	Object Name	Units	Min. Value	Max. Value	Valid Values within Range
101	Application Mode Control	None	0	255	0,1,3,6,9,208,209,216,217,218,224-254,255*
102	Outdoor Air Min Pos Control	Percent	0	255	all
103	Occupancy Override Control	None	0	255	all
104	Occupancy Scheduler Control	None	0	255	all
107	Occupancy Sensor Input	None	0	255	all
108	Space Dehumidification Set point	Percent	0	100	all
109	Temperature Set point (abs)	Deg. F	36.25	100	all
110	Temperature Set point Offset	Deg. F	-32	31.75	all
113	Space Temperature Input	Deg. F	36.25	100	all
114	Emergency Override Control	None	0	255	all
115	Compressor Enable Control	None	0	255	all
117	Primary Heat Enable Control	None	0	255	all
119	Auxiliary Heat Enable Control	None	0	255	all
123	Duct Static Set point	In. of water	0	5	all
124	Building Static Set point	In. of water	-0.5	0.5	all
125	Discharge Air Cooling Set point	Deg. F	40	80	-9,40-80*
126	Discharge Air Heating Set point	Deg. F	80	140	-9,80-140*
127	Supply Fan Capacity Input	Percent	33	255	all*
128	Exhaust Fan Capacity Input	Percent	33	255	all
129	Set Economizer Outdoor Air Suitable	None	0	255	all

Table 34. Analog Output Objects List

* see Application Details section for limitations on data ra

12.5. Analog Value Objects

Optional Properties Supported: Optional Writable Properties: None Present_Value

Table 35. Analog Value Objects List

Object ID	Object Name	Units	Min. Value	Max. Value	Valid Values within Range	Note
1	Baud Rate Setting	None	9600	76800	9600, 19200, 38400, 76800	38400 default
130	Heating Occupied Set point	Deg. F	40	95	all	For occupied and unoccupied set points considered separately, the
131	Cooling Occupied Set point	Deg. F	40	95	all	heating set point must be lower than the cooling set point by at least the
132	Heating Unoccupied Set point	Deg. F	40	95	all	auto-changeover dead-band value set in M2 ECTO 6.15 (default 3 de-
133	Cooling Unoccupied Set point	Deg. F	40	95	all	gF).

12.6. Analog Input Objects

Optional Properties Supported: Optional Writable Properties: None

Out_Of_Service (AI239 - AI252, AI274 - AI285 only)

Table 36. Analog Input Objects List

bject ID	Object Name	Units	Data Range
198	Mac Address	None	0 – 127
199	M2 Address	None	1–31
200*	M2 Version[4]	None	0 – 127
201*	M2 Version[5]	None	0 – 127
202*	M2 Version[6]	None	0 – 127
203*	M2 Version[7]	None	0 – 127
204*	M2 Version[8]	None	0 – 127
205*	M2 Version[9]	None	0 – 127
206*	M2 Version[10]	None	0 – 127
207*	M2 Version[11]	None	0 – 127
231	Unit ID	None	0 – 127
232	Unit Status	None	0 – 255
239	Space Temperature	Deg. F	63.75 – 100.00
240	Discharge Air Temperature	Deg. F	-8.7 - 164.4
241	Effective Occupancy	None	0 – 2
242	Local Outside Air Temperature	Deg. F	-30.6 - 131.6
243	Local Space Temperature	Deg. F	63.75 - 100.00
244	Outside Air Damper	Percent	0 – 100, 255
245	Heat Primary	Percent	0-100
246	Heat Secondary	Percent	0-100
247	Cool Primary	Percent	0-100
248	Economizer Enabled	Percent	0, 1, 255
250	Supply Fan Status	Percent	0 – 100
252	Space Temperature Set Point (Eff)	Deg. F	40.0 - 95.0
253	Current Error	None	0 – 255
254	Error Pointer	None	0-83
255	Most recent Error 1	None	1 – 255
256	Most recent Error 2	None	1 – 255
257	Most recent Error 3	None	1 – 255
258	Most recent Error 4	None	1 – 255
259	Most recent Error 5	None	1 – 255
260	Most recent Error 6	None	1 – 255
261	Most recent Error 7	None	1 – 255
262	Most recent Error 8	None	1 – 255
263	Most recent Error 9	None	1 – 255
264	Most recent Error 10	None	1 – 255
274	Space CO2 Sensor (Eff)	Parts-per-million	0 – 2000
275	Space CO2 Sensor (Local)	Parts-per-million	0 – 2000
276	Space Humidity (Eff)	Percent	0 - 100
277	Space Humidity (Local)	Percent	0 – 100
278	Dehumidification Set Point (Eff)	Percent	0 – 100
279	Dehumidification Status	None	0 – 2
281	Return Air Temperature	Deg. F	-8.7 - 164.4
282	Building Static Pressure	Inches of water	-0.5 - 0.5
283	Duct Static Pressure	Inches of water	0-5.00
285	Exhaust Fan Status	Percent	0 – 100

13. Modulating Gas Valve (MGV)

Units equipped with optional modulating gas valves (MGV) contain two modulating gas valves in addition to two standard gas valves.

13.1. Operation

The M2 will control modulating gas valves to maintain 110°F (default) discharge air during the heating cycle. The left heat section will operate when 25-50% of nameplate heat is needed. Both heat sections will operate when 50-100% of the nameplate heat is needed.

The normally open MGV will allow full heating capacity should the MGV fail.

13.2. Testing

Use the options given under the Prodigy "SERVICE/TEST" menu to run high or low capacity output.

13.3. M2 Output

The M2 0-10VDC output to the MGVs increases to modulate valves further closed during a reduced heating demand. The M2 0-10VDC output to the MGVs decreases to modulate valves further open during a higher heating demand.



14. Load Shedding Options

The M2 may be setup to de-energize half of the mechanical cooling provided by a rooftop unit. A digital input to either the economizer (A55_P297-9) or the (A133) GP1 board is required. This option is set by adjusting ECTO 7.25. See table 37.

Options	Digital Input (energized for load shedding)
2 or 3	A55_P297-9
4 or 5	A133_P194-1 (TB22-1) (A133 DIP set to GP)
6 or 7	A133_P194-2 (TB22-2) (A133 DIP set to GP)
8 or 9	A133_P194-1 (TB19-1) (A133 DIP set to MGV)
10 or 11	A133_P194-2 (TB19-2) (A133 DIP set to MGV)
12 or 13	A133_P194-1 (TB18-1) (A133 DIP set to VAV)
14 or 15	A133_P194-2 (TB18-2) (A133 DIP set to VAV)

Table 37. Adjusting Load Shedding Options

This option also selects the digital input used and determines which compressors are shed on units equipped with 1 or 3 (odd) compressors. See table 38.

Table 38. Compressors Disabled by Load Shedding Options

Unit Size	Compressors Disabled By Option 2, 4, 6, 8, 10, 12, 14	Compressors Disabled By Option 3, 5, 7, 9, 11, 13, 15
1 Compressor	None	CP1
2 Compressors	CP2	CP2
3 Compressors	CP3	CP2 & CP3
4 Compressors	CP3 & CP4	CP3 & CP4

To shut down the whole unit, Digital Input DI 3 on the A55_P299_6 (A42) can be de-energized. This feature must be enabled through Prodigy unit configuration.

The M2 readout will display "LS" when the unit is in load shedding mode.

The special option 1 will shed all compressors when the DI-3 input opens (de-energizes). This option is available on M2 v7.07 and later.

15. Service Relay

15.1. Service Relay Operation

The M2 Service Relay output (A55_P298-8) default operation indicates that service is required. Table 40 indicates these critical alarms with an asterisk.

If the default operation is not required, the Service Relay output may be used as a control output. Use ECTO 7.22 to choose the input which will trigger the Service Relay output. The formula $X + (32 \times Y) + (16 \times Z)$ is used to select the option. See table 39.

If ECTO 7.22 input sources 7-9 are used, the set point and dead-band must be set with ECTO 7.23 and 7.24.

Cont	trol Parameter	Control Value				
No.	Name	Min	Default	Max.	Units	Description
7.22	Service_ Output_ Control_Mode	0	0	127	Option	A55 Service Output Control Mode = X + 32*Y + 16*Z Input source = X: 0- None. Standard Service Output based on alarms. 1- Compressor 1 duty cycle. (Compressor crankcase heater function.) On when OAT < = ECTO 7.23 and >= ECTO 7.24 seconds have passed with compressor 1 off. Off when OAT > ECTO 7.23 + 3 deg F (fixed dead- band) or < ECTO 7.24 seconds have passed with compressor 1 off
7.23	Service_ Output_SP	0 0 0 132	127 996 100 51	255 2000 100 -31	Counts I:ppm P: % Y:DegF	A55 service relay output set point.
7.24	Service_ Output_ DB	2 16 2 1 64	13 102 13 8 416	255 2000 100 162 8160	Counts I:ppm P: % O:DegF D:Sec.	A55 service relay output dead-band or delay.

Table 39. Service Relay Options

Example 1: Use the Service output to energize a dehumidifier at 60% RH and turn off at 55% RH. (Refer to figure 31.)

1. Determine:		
ECTO 7. 22- Input Source X to option "7" (RH) Algorithm Y to option "0" (hysteresis loop) Inversion Z option "0" (output not inverted)		Dehumidifier On
2. Apply step 1 to ECTO 7.22 formula:		
ECTO 7.22 = $X + (32 \times Y) + (16 \times Z)$ = 7 + (32 × 0) + (16 × 0)	l l	↑
= 7	Dehumidifier Off	
3. Set ECTO 7.22 to "7".	55% RH	60% RH
4. Set ECTO 7.23 to 60% (60 counts) for 60% RH	(ECTO 7.23-7.24) 60-5=55%	(ECTO 7.23)
5. Set ECTO 7.24 to 5% (5 counts) for 5% dead-band.	00-5-55%	

Figure 31. Example 1. Service output energizes dehumidifier at 60% RH / turns off at 55% RH

Example 2: Use the service output to energize a humidifier at 30% RH and turn off at 35% RH. (Refer to figure 32.)

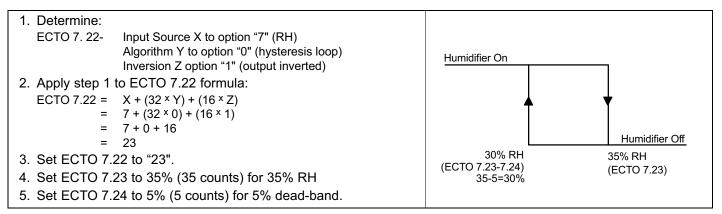


Figure 32. Example 2. Service output energizes dehumidifier at 30% RH / turns off at 35% RH

15.2. OAT Operation

Figure 33 shows the service output being energized at 80°F and off at 70°F (inverted) and the service output operation being energized at 70°F and off at 80°F (not inverted).

IMPORTANT - This applies to input source option 9 (OAT) on ECTO 0.23, 3.21, 7.22, and 9.23.

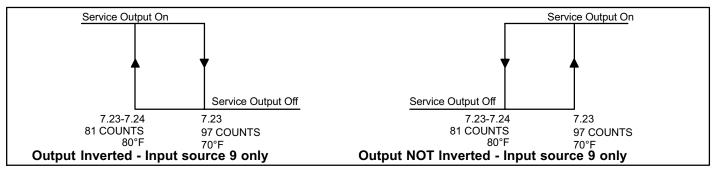


Figure 33. OAT Operation - Service output energized

16. Diagnostics

16.1. M2 Event Codes

When an event occurs, the M2 Unit Controller will display a code which corresponds to control function. See table 40. Error codes are stored and can be recalled later. See the *Installation & Setup Guide For The Prodigy M2 Unit Controller* for information about viewing and silencing the alarms via the user interface.

Code	Display Message	Action
0		
1	ALARM(1) ERRATIC POWER	CHECK POWER CONNECTIONS
2	ALARM(2) CHECK SETTINGS	RESET CONTROLLER. CHECK UNIT SETTINGS. CONTACT LENNOX IF PROBLEM PERSISTS.
3	Reserved	
4	ALARM(4) SMOKE A173	SMOKE MODE. CHECK FOR SOURCE OF SMOKE.
5	ALARM(5) BLOWER S52	UNIT OFF. AIR FLOW SWITCH OPEN 16 SEC AFTER DEMAND. CHECK BLOWER PARTS
6	ALARM(6) FILTER S27	REPLACE FILTER OR CHECK FILTER SWITCH S27
7	ALARM(7) CONTROLLER PROBLEM	RESET CONTROLLER. CHECK UNIT SETTINGS. CONTACT LENNOX IF PROBLEM PERSISTS.
8	ALARM(8) STRIKE 3 ON BLOWER S52	LOCKOUT. MULTIPLE CODE 5. CHECK BLOWER PARTS
9 – 11	Reserved	
12	ALARM(12) COMP 1 HIGH PRESS S4	COMP OFF. CHECK CHARGE, FANS, COIL.
13	ALARM(13) STRIKE 3 ON COMP 1 HIGH PRESS S4	COMP LOCKOUT. CHECK CHECK CHARGE, FANS, COIL. USE SERVICE MENU TO CLEAR LOCKOUTS.
14	ALARM(14) COMP 2 HIGH PRESS S7	COMP OFF. CHECK CHARGE, FANS, COIL.
15	ALARM(15) STRIKE 3 ON COMP 2 HIGH PRESS S7	COMP LOCKOUT. CHECK CHECK CHARGE, FANS, COIL. USE SERVICE MENU TO CLEAR LOCKOUTS.
16	ALARM(16) COMP 3 HIGH PRESS S28	COMP OFF. CHECK CHARGE, FANS, COIL.
17	ALARM(17) STRIKE 3 ON COMP 3 HIGH PRESS S28	COMP LOCKOUT. CHECK CHARGE, FANS, COIL. USE SERVICE MENU TO CLEAR LOCKOUTS.
18	ALARM(18) COMP 4 HIGH PRESS S96	COMP OFF. CHECK CHARGE, FANS, COIL.
19	ALARM(19) STRIKE 3 ON COMP 4 HIGH PRESS S96	COMP LOCKOUT. CHECK CHECK CHARGE, FANS, COIL. USE SERVICE MENU TO CLEAR LOCKOUTS.
NOTE - A	Alarms 12-19 could also be caused by a high temp	perature condition on some compressors equipped with a high temperature shutdown.
20	ALARM(20) UNIT SHUTDOWN A42	CHECK PHASE MONITOR
21	ALARM(21) STRIKE 3 UNIT SHUT- DOWN A42	CHECK PHASE MONITOR
22	ALARM(22) COMP 1 LOW PRESS S87	COMP OFF. CHECK CHARGE, FILTERS, AIR FLOW. COIL
23	ALARM(23) STRIKE 3 ON COMP 1 S87	COMP LOCKOUT. CHECK CHECK CHARGE, FILTER, AIR FLOW, COIL. USE SERVICE MENU TO CLEAR LOCKOUTS.
24	ALARM(24) COMP 2 LOW PRESS S88	COMP OFF. CHECK CHARGE, FILTERS, AIR FLOW. COIL
25	ALARM(25) STRIKE 3 ON COMP 2 S88	COMP LOCKOUT. CHECK CHECK CHARGE, FILTER, AIR FLOW, COIL. USE SERVICE MENU TO CLEAR LOCKOUTS.
26	ALARM(26) COMP 3 LOW PRESS S98	COMP OFF. CHECK CHARGE, FILTERS, AIR FLOW. COIL
27	ALARM(27) STRIKE 3 ON COMP 3 S98	COMP LOCKOUT. CHECK CHECK CHARGE, FILTER, AIR FLOW, COIL. USE SERVICE MENU TO CLEAR LOCKOUTS.
28	ALARM(28) COMP 4 LOW PRESS S97	COMP OFF. CHECK CHARGE, FILTERS, AIR FLOW. COIL
		COMP LOCKOUT. CHECK CHECK CHARGE, FILTER, AIR FLOW, COIL.
29	ALARM(29) STRIKE 3 ON COMP 4 S97	USE SERVICE MENU TO CLEAR LOCKOUTS.

Table 40. M2 Event Codes	Table 4	40. M2	Event	Codes
--------------------------	---------	--------	-------	-------

349 SIDE TEMP 34 ALARM(33) STRIKE 3 COMP 1FRZ. COMP LOCKOUT CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER 34 ALARM(34) COMP 2 FRZSTAT OPEN COMP LOCKOUT, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 35 ALARM(36) STRIKE 3 COMP 2 FRZ COMP LOCKOUT, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 36 ALARM(35) STRIKE 3 COMP 3 FRZ COMP LOCKOUT, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 36 ALARM(36) STRIKE 3 COMP 3 FRZ COMP LOCKOUT, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 37 STAT OPEN SS0 OUTSIDE TEMP OUTSIDE TEMP 38 SA65 SIDE TEMP OUTSIDE TEMP 39 STATA OPEN SS0 OUTSIDE TEMP OUTSIDE TEMP 39 STATA OPEN SS0 OUTSIDE TEMP OUTSIDE TEMP 39 STATA OPEN SS0 OUTSIDE TEMP OUTSIDE TEMP 30 SALARM(40) RETURN AIR OVER HEAT LARM(40) RETURN AIR OVER COMP DE-CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 30 ALARM(41) RETURN AIR OVER COMP DE-CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 310 ALARM(41) RETURN AIR OVER COMP DE-CHECK FRZSTAT, AIR	Code	Display Message	Action
ALARM(2) COMP 1 FRZSTAT OPEN COMP OFF CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 31 SLARM(3) STRIKE 3 COMP 1 FRZ- STAT OPEN SA9 COMP LOCKOUT CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 34 ALARM(3) COMP 2 FRZSTAT OPEN COMP OFF. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 35 ALARM(3) COMP 3 FRZSTAT OPEN COMP OFF. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 36 ALARM(3) STRIKE 3 COMP 3 FRZ COMP IOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 36 ALARM(3) STRIKE 3 COMP 3 FRZ COMP IOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 37 ALARM(3) STRIKE 3 COMP 4 FRZ COMP IOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 38 ALARM(3) STRIKE 3 COMP 4 FRZ COMP IOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 39 ALARM(3) STRIKE 3 COMP 4 FRZ COMP IOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 39 ALARM(40) RETURN AIR OVER HEAT ADOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 40 HEAT JUNIT SHUTDOWN S42 CHECK EXT MTR OVERLOADS 41 COMIN CHECK FRZ STAT, AIR FLOW, CHARGE, COIL, FILTER 42 ALARM(4) RETURN AIR UNDER COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 44<	31		CHECK OVERFLOW SW
33 STAT OPEN 549 OUTSIDE TEMP 34 ALARMG3(COMP 2 FRZSTAT OPEN COMP OPE CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 35 STAT OPEN 550 COMP OPE CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER 36 Stat OPEN 550 COMP OPE, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 37 ALARM(30) STRIKE 3 COMP 3 FRZ- STAT OPEN 550 COMP OPE, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 38 S96 STAT OPEN 550 COMP OPE, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 39 STAT OPEN 550 COMP OPE, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 39 STAT OPEN 550 COMP OPE, CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 41 ALARM(40) RETURN AIR OVER HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 ALARM(41) RETURN AIR UNDER COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 42 ALARM(41) RITUR CHECK EXT MTR OVERLOADS 43 ALARM(41) RTUR SHUTDOWN S42 CHECK EXT MTR OVERLOADS 44 ALARM(42) UNIT SHUTDOWN S42 CHECK EXT MTR OVERLOADS 45 ALARM(42) VALVE ON NO DE- UNIT OFF, GV3 POWER BUT NO DEMAND.	32	ALARM(32) COMP 1 FRZSTAT OPEN	COMP OFF. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT- SIDE TEMP
34 S50 SIDE TEMP 35 ALARM(36) STRIKE 3 COMP 2 FR2- STAT OPEN S50 COMP IOCKOUT CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTEF OUTSIDE TEMP 36 ALARM(36) COMP 3 FR2STAT OPEN SS3 COMP OFF, CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTEF, OUT SIDE TEMP 37 STAT OPEN SS3 COMP OFF, CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTEF, OUT SIDE TEMP 38 S95 COMP 1 FR2STAT OPEN SIDE TEMP COMP OFF, CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTEF, OUT SIDE TEMP 39 ALARM(38) STRIKE 3 COMP 4 FR2- STAT OPEN S95 COMP 1 COKOUT. CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTEF, OUTSIDE TEMP 40 ALARM(40) RETURN AIR OVER HEAT LIMIT RT16 COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR HEAT LIMIT RT16 41 ALARM(40) RETURN AIR UNDER COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR CHECK EXT MTR OVERLOADS 42 ALARM(42) UNT SHUTDOWN S42 OR S135 CHECK EXT MTR OVERLOADS 43 ALARM(43) STRIKE 3 UNIT SHUT- DOWN S42 OR S135 CHECK EXT MTR OVERLOADS 44 ALARM(43) GAS VALVE ON NO DE- MAND WIRING. VALVE 45 ALARM(43) GAS VALVE ON NO DE- MAND WIRING. VALVE 46 Reserved FEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. <t< td=""><td>33</td><td></td><td></td></t<>	33		
35 STAT OPEN S80 OUTSIDE TEMP 36 ALARM(39) COMP 3 FR2STAT OPEN COMP OPEF, CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 37 STAT OPEN S33 COMP 10 FEMP COMP LOCKOUT. CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 38 S95 STAT OPEN S3 COMP 10 FE. CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 39 STAT OPEN S3 COMP 0 FF. CHECK FR2STAT, AIR FLOW, CHARGE, COIL, FILTER, OUT 39 STAT OPEN S3 COMP 10 FEMP 40 ALARM(40) RETURN AIR OVER HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 ALARM(41) RETURN AIR UNDER COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 42 ALARM(42) UNIT SHUTDOWN S42 CHECK EXT MTR OVERLOADS 43 ALARM(42) GAS VALVE ON NO DE- UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS 44 MAND GV3 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK AIR FLOW, LIMIT, 50 ALARM(43) GAS VALVE ON NO DE- UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK AIR FLOW, LIMIT, 51 ALARM(50) STRIKE 3 PRIMARY HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, 50 ALARM(50) PRIMARY HEAT 1 LIMIT HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CH	34	S50	
36 SS3 SIDE TEMP 37 ALARM(37) STRIKE 3 COMP 3 FR2- STAT OPEN SS3 COMP LOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OU SIDE TEMP 38 ALARM(39) STRIKE 3 COMP 4 FR2- STAT OPEN SS3 COMP OFF. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 39 ALARM(40) RETURN AIR OVER HEAT IMIT RT16 COMP LOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 40 ALARM(41) RETURN AIR OVER HEAT MOVER HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 ALARM(42) INIT SHUTDOWN S42 COL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 42 ALARM(43) STRIKE 3 UNIT SHUT- COOL LIMIT RT16 COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 43 ALARM(43) GAS VALVE ON NO DE- MAND GV1 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS MAND GV3 44 MAND GV3 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK AIR FLOW, LIMIT, AND WIRING. 50 ALARM(60) PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 ALARM(61) STRIKE 3 PRIMARY HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 52 ALARM(63) STRIKE 3 PRI ALT 1 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 54	35	STAT OPEN S50	OUTSIDE TEMP
37 STAT OPEN S53 OUTSIDE TEMP 38 ALARM(38) COMP 4 FR2STAT OPEN S95 COMP OFE: CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT SIDE TEMP 39 STAT OPEN S55 COMP LOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUTSIDE TEMP 40 ALARM(40) RETURN AIR OVER HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR COLLIMIT RT16 HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 ALARM(41) RETURN AIR UNDER COOL BLOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR COAL BLOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 42 ALARM(42) STRIKE 3 UNIT SHUT- DOWN S42 OR S135 CHECK EXT MTR OVERLOADS 43 DOWN S42 OR S135 CHECK EXT MTR OVERLOADS 44 MAND GV1 VALVE 45 ALARM(43) GAS VALVE ON NO DE- MAND GV3 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 46 ALARM(50) FRIMARY HEAT 1 LIMIT HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. ALARM(52) SECONDARY HEAT 1 51 ALARM(53) STRIKE 3 SECONDARY HEAT 1 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 52 ALARM(53) STRIKE 3 FERIMARY HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 54 ALARM(53) STRIKE 3 SECONDARY HEAT 1 HEAT	36		
38 SIDE TEMP 39 ALARM(39) STRIKE 3 COMP 4 FR2- OUTSIDE TEMP COMP 10CKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTEF OUTSIDE TEMP 40 HEAT LIMIT RT16 HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 ALARM(40) RETURN AIR OVER HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 ALARM(41) RETURN AIR UNDER COOL LIMIT RT16 COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 42 ALARM(42) UNIT SHUTDOWN S42 OR 5135 CHECK EXT MTR OVERLOADS 43 ALARM(44) GAS VALVE ON NO DE- WAND GV1 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS WALVE 44 ALARM(45) GAS VALVE ON NO DE- WAND GV1 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS WALVE 45 ALARM(50) GR VIAVE ON NO DE- WALVE UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK AIR FLOW, LIMIT, AND WIRING. 50 ALARM(50) PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 ALARM(53) STRIKE 3 SECONDARY HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 53 ALARM(53) STRIKE 3 PRIMARY HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 54 ALARM(54) HEAT 1 ROLL OUT OPEN HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, ALARM(53) STRIKE 3 HEAT 1 NOLL	37		COMP LOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUTSIDE TEMP
39 STAT OPEN S95 OUTSIDE TEMP 40 ALARM(40) RETURN AIR OVER HEAT LIMIT RT16 HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 COOL LIMIT RT16 COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 42 ALARM(41) RETURN AIR UNDER COOL LIMIT RT16 COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 43 ALARM(42) UNIT SHUTDOWN S42 OR S135 CHECK EXT MTR OVERLOADS 44 ALARM(44) GAS VALVE ON NO DE- WAND GV1 CHECK EXT MTR OVERLOADS 45 ALARM(43) GAS VALVE ON NO DE- WAND GV3 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 46 ALARM(50) PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 HEAT 1 LIMIT OPEN S21 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 52 ALARM(52) SECONDARY HEAT 1 LIMIT OPEN S21 HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 53 ALARM(56) STRIKE 3 SECONDARY HEAT 1 ST5 LIMIT OPEN S21 HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 54 ALARM(65) STRIKE 3 HEAT 1 ROLL OUT OPEN HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 55 ALARM(65) STRIKE 3 HEAT 1 CAI WITCH S18 HEAT SECT 1 CHECK GAS ROLL OUT S47	38		COMP OFF. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUT- SIDE TEMP
40 HEAT LIMIT RT16 HEAT ABUVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 41 ALARM(41) RETURN AIR UNDER COOL LIMIT RT16 COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR 42 ALARM(42) UNIT SHUTDOWN S42 OR S135 CHECK EXT MTR OVERLOADS 43 ALARM(43) STRIKE 3 UNIT SHUT- DOWN S42 OR S135 CHECK EXT MTR OVERLOADS 44 ALARM(44) GAS VALVE ON NO DE- MAND GV3 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 45 ALARM(45) GAS VALVE ON NO DE- MAND GV3 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 46 - 49 Reserved UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK AIR FLOW, LIMIT, OPEN S10 50 ALARM(50) PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 HEAT 1 LIMIT OPEN S10 AND WIRING. 52 ALARM(50) STRIKE 3 SECONDARY HEAT 1 HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 53 ALARM(53) STRIKE 3 SECONDARY HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FL- HEAT 1 LIMIT OPEN S21 54 ALARM(54) HEAT 1 S15 LIMIT OPEN HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 55 ALARM(56) STRIKE 3 HEAT 1 S15 LIMIT OPEN HEAT SECT 1 CHECK GAS ROLL OUT S47 64 <	39		COMP LOCKOUT. CHECK FRZSTAT, AIR FLOW, CHARGE, COIL, FILTER, OUTSIDE TEMP
41 COOL DIMIT RT16 COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OF SENSOR 42 ALARM(42) UNIT SHUTDOWN S42 OR S135 CHECK EXT MTR OVERLOADS 43 ALARM(43) STRIKE 3 UNIT SHUT- DOWN S42 OR S135 CHECK EXT MTR OVERLOADS 44 ALARM(44) GAS VALVE ON NO DE- MAND GV1 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 45 ALARM(45) GAS VALVE ON NO DE- MAND GV1 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 46 - 49 Reserved UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK AIR FLOW, LIMIT, AND WIRING. 51 ALARM(50) PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 ALARM(51) STRIKE 3 PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 52 LIMIT OPEN S21 AND WIRING. HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 53 ALARM(53) STRIKE 3 SECONDARY HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 54 ALARM(54) HEAT 1 S15 LIMIT OPEN HEAT SECT 1 CHECK GAS ROLL OUT S47 55 ALARM(56) STRIKE 3 HEAT 1 ROLL OUT OPEN HEAT SECT 1 CHECK GAS ROLL OUT S47 56 ALARM(56) STRIKE 3 HEAT 1 CAI SWITCH S18 HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH AL	40	HEAT LIMIT RT16	HEAT ABOVE SETPOINT. CHECK SPACE CONDITIONS OR SENSOR
42 OR S135 CHECK EXT MITH OVERLOADS 43 DOWN S42 OR S135 CHECK EXT MITH OVERLOADS 44 ALARM(43) STRIKE 3 UNIT SHUT- DOWN S42 OR S135 CHECK EXT MITH OVERLOADS 44 ALARM(44) GAS VALVE ON NO DE- MAND GV1 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 45 ALARM(50) GAS VALVE ON NO DE- MAND GV3 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 46 - 49 Reserved HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 50 ALARM(50) PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 ALARM(52) SECONDARY HEAT 1 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. HEAT SECT 1 SECONDARY HEAT 1 HEAT SECT 1 SECONDARY HEAT 1 HEAT SECT 1 SECONDARY HEAT 1 MAND WIRING. 53 ALARM(53) STRIKE 3 SECONDARY HEAT 1 DUL OUT OPEN HEAT SECT 1 CHECK GAS ROLL OUT S47 54 ALARM(54) HEAT 1 SUITION OPEN. HEAT SECT 1 CHECK GAS ROLL OUT S47 HEAT SECT 1 CHECK GAS ROLL OUT S47 55 ALARM(55) STRIKE 3 HEAT 1 S15 LIMIT OPEN. HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH 57 56 ALARM(56) HEAT 1 NO PROOF GAS VALVE GV1 HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY 59	41	COOL LÌMÍT RT16	COOL BELOW SETPOINT. CHECK SPACE CONDITIONS OR SENSOR
43 DOWN \$42 OR \$135 Check EXT INTH OVERLOADS 44 ALARM(44) GAS VALVE ON NO DE- MAND GV1 UNIT OFF. GV1 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 45 ALARM(45) GAS VALVE ON NO DE- MAND GV3 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 46 - 49 Reserved UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 50 ALARM(50) PRIMARY HEAT 1 LIMIT OPEN \$10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 ALARM(52) SECONDARY HEAT 1 LIMIT OPEN \$21 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 52 ALARM(53) STRIKE 3 SECONDARY HEAT 1 LIMIT OPEN \$21 HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING. 53 ALARM(53) STRIKE 3 SECONDARY HEAT 1 COLOUT OPEN HEAT SECT 1 SECONDARY HEAT 1 MOLL OUT OPEN HEAT SECT 1 CHECK GAS ROLL OUT \$47 54 ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPEN HEAT SECT 1 CHECK GAS ROLL OUT \$47 55 ALARM(56) HEAT 1 CAI SWITCH \$18 HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH 1 HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS VALVE GV1 59 ALARM(69) STRIKE 3 NO PROOF GAS VALVE GV1 HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY 60 ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99 HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW	42	OR S135	CHECK EXT MTR OVERLOADS
44 MAND GV1 VALVE 45 ALARM(45) GAS VALVE ON NO DE- MAND GV3 UNIT OFF. GV3 POWER BUT NO DEMAND. CHECK GAS PRESS, GAS VALVE 46 - 49 Reserved Interpretation 50 ALARM(50) PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 51 ALARM(51) STRIKE 3 PRIMARY HEAT 1 LIMIT OPEN S10 HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 52 ALARM(52) SECONDARY HEAT 1 LIMIT OPEN S21 HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 53 ALARM(63) STRIKE 3 SECONDARY HEAT 1 LIMIT OPEN S21 HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING. 54 ALARM(64) HEAT 1 ROLL OUT OPEN HEAT SECT 1 CHECK GAS ROLL OUT S47 HEAT SECT 1 CHECK GAS ROLL OUT S47 55 ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPEN HEAT SECT 1 CHECK GAS ROLL OUT S47 66 ALARM(55) STRIKE 3 HEAT 1 S15 LIMIT OPEN HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH SWITCH S18 57 ALARM(56) STRIKE 3 NEAT 1 CAI SWITCH S18 HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY 59 ALARM(69) STRIKE 3 NO PROOF HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY 60 ALARM(60) STRIKE 3 NO PRO	43	DOWN S42 OR S135	
43 MAND GV3 VALVE 46 - 49 Reserved	44	MAND GV1	
49Heserved50ALARM(50) PRIMARY HEAT 1 LIMIT OPEN S10HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.51ALARM(51) STRIKE 3 PRIMARY HEAT 1 LIMIT OPEN S10HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.52ALARM(52) SECONDARY HEAT 1 LIMIT OPEN S21HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.53ALARM(53) STRIKE 3 SECONDARY HEAT 1 LIMIT OPEN S21HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING.54ALARM(54) HEAT 1 ROLL OUT OPEN HEAT SECT 1 CHECK GAS ROLL OUT S47HEAT SECT 1 CHECK GAS ROLL OUT S4754ALARM(54) HEAT 1 S15 LIMIT OPEN OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4755ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4756ALARM(56) HEAT 1 CAI SWITCH S18 SWITCH S18HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH57ALARM(56) HEAT 1 CAI SWITCH S18 SWITCH S18HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH58ALARM(58) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	45		
50OPEN S10AND WIRING.51ALARM(51) STRIKE 3 PRIMARY HEAT 1 LIMIT OPEN S10HEAT SECT 1 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.52LIMIT OPEN S21HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMI AND WIRING.53ALARM(53) STRIKE 3 SECONDARY HEAT 1 LIMIT OPEN S21HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING.54ALARM(54) HEAT 1 ROLL OUT OPEN HEAT 1 S15 LIMIT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4755ALARM(54) HEAT 1 S15 LIMIT OPEN UT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4756ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH57ALARM(56) HEAT 1 CAI SWITCH S18 WITCH S18HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT ALARM(61) STRIKE 3 NPROOF MICH S18HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.		Reserved	
51HEAT 1 LIMIT OPEN S10AND WIRING.52ALARM(52) SECONDARY HEAT 1 LIMIT OPEN S21HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMI AND WIRING.53ALARM(53) STRIKE 3 SECONDARY HEAT 1 LIMIT OPEN S21HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING.54ALARM(54) HEAT 1 ROLL OUT OPEN HEAT 1 S15 LIMIT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(54) HEAT 1 S15 LIMIT OPEN OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(56) HEAT 1 CAI SWITCH S18 LIMIT OPENHEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH56ALARM(56) HEAT 1 CAI SWITCH S18 WITCH S18HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH58ALARM(58) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(69) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	50		AND WIRING.
52LIMIT OPEN S21AND WIRING.53ALARM(53) STRIKE 3 SECONDARY HEAT 1 LIMIT OPEN S21HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING.54ALARM(54) HEAT 1 ROLL OUT OPEN ALARM(55) STRIKE 3 HEAT 1 S15 LIMIT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4755ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4755ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4756ALARM(55) STRIKE 3 HEAT 1 S15 LIMIT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4756ALARM(56) HEAT 1 CAI SWITCH S18 SWITCH S18HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH57ALARM(56) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	51		
53HEAT 1 LIMIT OPEN S21TER, LIMIT, AND WIRING.54ALARM(54) HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(54) HEAT 1 S15 LIMIT OPENHEAT SECT 1 LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.55ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S4760ALARM(56) HEAT 1 CAI SWITCH S18HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF, GV1, GAS SUPPLY60ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, ALARM(61) STRIKE 3 PRIMARY	52	LIMIT OPEN S21	HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.
ALARM(54)HEAT 1 S15 LIMIT OPENHEAT SECT 1 LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.55ALARM(55)STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(55)STRIKE 3 HEAT 1 S15 LIMIT OPENHEAT SECT 1 LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.56ALARM(56)HEAT 1 CAI SWITCH S18HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH57ALARM(57)STRIKE 3 HEAT 1 CAI SWITCH S18HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH58ALARM(58)HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(50)STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60)PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	53		HEAT SECT 1 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING.
55ALARM(55) STRIKE 3 HEAT 1 ROLL OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(55) STRIKE 3 HEAT 1 S15 LIMIT OPENHEAT SECT 1 LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.56ALARM(56) HEAT 1 CAI SWITCH S18HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH57ALARM(57) STRIKE 3 HEAT 1 CAI SWITCH S18HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH58ALARM(58) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	54		
55OUT OPENHEAT SECT 1 CHECK GAS ROLL OUT S47ALARM(55) STRIKE 3 HEAT 1 S15 LIMIT OPENHEAT SECT 1 LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.56ALARM(56) HEAT 1 CAI SWITCH S18HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH57ALARM(57) STRIKE 3 HEAT 1 CAI SWITCH S18HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH58ALARM(58) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.			HEAT SECT 1 LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.
LIMIT OPENHEAT SECT 1 LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.56ALARM(56) HEAT 1 CAI SWITCH S18HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH57ALARM(57) STRIKE 3 HEAT 1 CAI SWITCH S18HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH58ALARM(58) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	55	OUT OPEŃ	HEAT SECT 1 CHECK GAS ROLL OUT S47
57ALARM(57) STRIKE 3 HEAT 1 CAI SWITCH S18HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH58ALARM(58) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT,		LIMIT OPEN	
57SWITCH S18HEAT SECT TOFF CHECK COMBOSTION AIR MOTOR & PROOF SWITCH58ALARM(58) HEAT 1 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY59ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY60ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.61ALARM(61) STRIKE 3 PRIMARYHEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	56		HEAT SECT 1 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH
58 VALVE GV1 SUPPLY 59 ALARM(59) STRIKE 3 NO PROOF GAS VALVE GV1 HEAT SECT 1 CHECK IGNITION CONTROL, FLAME PROOF, GV1, GAS SUPPLY 60 ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99 HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 61 ALARM(61) STRIKE 3 PRIMARY HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.	57		HEAT SECT 1 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH
59 GAS VALVÉ GV1 SUPPLY 60 ALARM(60) PRIMARY HEAT 2 LIMIT OPEN S99 HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. 61 ALARM(61) STRIKE 3 PRIMARY HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT,	58	VALVE GV1	SUPPLY
60 OPEN \$99 AND WIRING. 61 ALARM(61) STRIKE 3 PRIMARY HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT,	59	GAS VALVE GV1	SUPPLY
	60	OPEN S99	AND WIRING.
HEAT 2 LIMIT OPEN S99 AND WIRING.	61	ALARM(61) STRIKE 3 PRIMARY HEAT 2 LIMIT OPEN S99	HEAT SECT 2 PRIMARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING.

ALARM(62) HEAT 2 LIMIT OPEN AND WIRING. HEAT SECT 2 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, LIMIT, AND WIRING. ALARM(63) STRIKE 3 HEAT 2 LIMIT OPEN S100 HEAT SECT 2 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FLL TER. LIMIT, ADD WIRING. 64 ALARM(64) HEAT 2 ROLLOUT OPEN ALARM(65) STRIKE 3 ROLLOUT OPEN S69 CHECK ROLLOUT SENSOR AND GAS 66 ALARM(66) HEAT 2 CAI SWITCH 545 HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH ALARM(67) STRIKE 3 HEAT 2 CAI WITCH 545 67 ALARM(67) STRIKE 3 HEAT 2 CAI SWITCH 545 HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH ALARM(67) STRIKE 3 NO PROOF GAS VALVE GV3 68 ALARM(68) HEAT 2 CAI SWITCH 545 HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS SUPPLY 70 Reserved HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS SUPPLY 74 ALARM(74) ZONE SENSOR A2 CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS (LGFTS AND WIRING 75 ALARM(74) ZONE SENSOR A2 CHECK SENSOR AND WIRING 76 ALARM(75) OUTDOOR TEMP SENSOR RT10 CHECK SENSOR AND WIRING 77 ALARM(76) HUMIDITY SENSOR A2 CHECK SENSOR AND WIRING 78 ALARM(76) ADD-ON BOARD PROB- LEM CHECK SENSOR AND WIRING 79 ALARM(76) ADD-ON BOARD PROB- LEM CHECK SENSOR AND WIRING 71 ALARM(78) MOTORECT FU	Code	Display Message	Action
ALARM(6) STRIKE 3 HEAT 2 LIMIT HEAT SECT 2 SECONDARY HEAT LIMIT OPEN. CHECK AIR FLOW, FIL- TER, LIMIT, AND WIRING. 64 ALARM(63) STRIKE 3 ROLLOUT OPEN S69 CHECK ROLLOUT SENSOR AND GAS 65 ALARM(63) STRIKE 3 ROLLOUT CHECK ROLLOUT SENSOR AND GAS 66 ALARM(63) STRIKE 3 HEAT 2 CAI CHECK ROLLOUT SENSOR AND GAS 67 ALARM(63) STRIKE 3 HEAT 2 CAI HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH 68 ALARM(64) HEAT 2 NO PROOF GAS HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH 69 ALARM(76) STRIKE 3 NO PROOF GAS HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 70- Reserved HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 70- Reserved CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS 71 ALARM(73) NETWORK SENSOR EP. ROR CHECK VITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS 72 Reserved CHECK SENSOR AND WIRING CHECK SENSOR AND WIRING 74 ALARM(76) NETURN AIR TEMP CHECK SENSOR AND WIRING CHECK SENSOR AND WIRING 76 ALARM(70) DOLON BOARD PROB- LEM ADD-ON BOARD PROB- ADD-ON BOARD DROLEM, RESET TO CLEAR CHECK CREAR EAT SETTING 74	62		
0 OPEN S100 TER, LIMIT, AND WIRING. 64 ALARM(R6) HEAT 2 ROLLOUT OPEN Seg CHECK ROLLOUT SENSOR AND GAS 65 ALARM(R6) STRIKE 3 ROLLOUT CHECK ROLLOUT SENSOR AND GAS 66 ALARM(R6) STRIKE 3 ROLLOUT CHECK ROLLOUT SENSOR AND GAS 67 ALARM(R6) FAIRE 3 ROLLOUT CHECK ROLLOUT SENSOR AND GAS 68 ALARM(R6) FEAT 2 CAI SWITCH S45 HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH 68 ALARM(R6) FEAT 2 NO PROOF GAS HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 69 ALARM(R6) FEAT RE 3 NO PROOF HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 70 - Reserved CHECK WITH INTEGRATOR FOR REFRESH PATE, NETWORK STATUS 70 - RESORVED CHECK WITH INTEGRATOR FOR REFRESH PATE, NETWORK STATUS 71 ALARM(72) NETWORK SENSOR RE CHECK SENSOR AND WIRING 72 RESORD RT1 CHECK SENSOR AND WIRING 73 ALARM(72) NETWORK SENSOR AS1 CHECK SENSOR AND WIRING 74 ALARM(72) NECHARGE AIR TEMP CHECK SENSOR AND WIRING 75 SENSOR ATT CHECK SENSOR AND WIRING 76 ALARM(77) NECHARGE AIR TE			
Bits Seg CHECK ROLLOUT SENSOR AND GAS 66 ALARM(65) STRIKE 3 ROLLOUT CHECK ROLLOUT SENSOR AND GAS 67 ALARM(66) HEAT 2 CAI SWITCH 545 HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH SWITCH 546 67 ALARM(67) STRIKE 3 HEAT 2 CAI HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH SWITCH 546 68 ALARM(67) STRIKE 3 NO PROOF GAS GAS VALVE GV3 HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS SUPPLY 70 - 72 Reserved HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS SUPPLY 73 ALARM(74) ZONE SENSOR AP CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS LIGHTS AND WIRING 74 ALARM(74) ZONE SENSOR AP CHECK SENSOR AND WIRING 74 ALARM(74) ZONE SENSOR AP CHECK SENSOR AND WIRING 75 ALARM(76) HUMIDITY SENSOR AP CHECK SENSOR AND WIRING 76 ALARM(76) HUMIDITY SENSOR AP CHECK SENSOR AND WIRING 77 SENSOR RT10 CHECK SENSOR AND WIRING 78 SENSOR RT10 CHECK SENSOR AND WIRING 79 ALARM(79) ADD-ON BOARD PROB- LEM CHECK REHEAT SETT NO 79 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO C	63	OPEN S100	
00 000000000000000000000000000000000000	64	S69	CHECK ROLLOUT SENSOR AND GAS
ALARWIG9 STRIKE 3 HEAT 2 CAI HEAT SECT 2 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH 67 SWITCH S45 HEAT SECT 2 OFF CHECK COMBUSTION AIR MOTOR & PROOF, GV3, GAS 68 ALARMIG9 STRIKE 3 NO PROOF SUPPLY 69 ALARMIG9, TRIKE 3 NO PROOF HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 70 - Reserved HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 71 ALARMI(73) NETWORK SENSOR ER- CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS 72 Reserved CHECK SENSOR AND WIRING 73 ROR CHECK SENSOR AND WIRING 74 ALARMI(73) NETWORK SENSOR A2 CHECK SENSOR AND WIRING 75 ALARMI(75) OUTDOOR TEMP CHECK SENSOR AND WIRING 76 ALARMI(75) DISCHARGE AIR TEMP CHECK SENSOR AND WIRING 77 ALARMI(75) DISCHARGE AIR TEMP CHECK SENSOR AND WIRING 78 ALARMI(79) ADD-ON BOARD PROB- CHECK SENSOR AND WIRING 79 ALARMI(78) RETURN AIR TEMP CHECK SENSOR AND WIRING 79 ALARMI(78) NOTOCRECT SETTINGS ADD-ON BRD PROBLEM, RESET TO CLEAR 80 LEM ADA-ON BRD PROBLEM CHECK SENSOR ATION 81 ALARMI(80) INC	65		CHECK ROLLOUT SENSOR AND GAS
of SWITCH \$45 HEAT SECT 2 OFF CHECK COMBOSTION ALL MOTOR & PHOOP SWITCH 68 ALARM(68) HEAT 2 NO PROOF GAS HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 70 ALARM(69) STRIKE 3 NO PROOF HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS 70 Reserved SUPPLY 71 Reserved CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS 74 ALARM(73) NETWORK SENSOR RA CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS 76 ALARM(75) OUTDOOR TEMP CHECK ZONE SENSOR AND WIRING 76 ALARM(76) HUMIDITY SENSOR A91 CHECK SENSOR AND WIRING 77 SENSOR RTI-0 CHECK SENSOR AND WIRING 78 SENSOR RTI-0 CHECK SENSOR AND WIRING 78 SENSOR RTI-0 CHECK SENSOR AND WIRING 79 ALARM(78) RETURN AIR TEMP CHECK SENSOR AND WIRING 79 SENSOR RTI-0 CHECK SENSOR AND WIRING 79 ALARM(80) ADD-ON BOARD PROB- ADD-ON BRD PROBLEM, RESET TO CLEAR 80 ALARM(81) REHEAT SETUP ERROR CHECK CONFIGURATION 84 Reserved CHECK CONTROLLER RESET	66		HEAT SECT 2 CHECK COMBUSTION AIR MOTOR & PROOF SWITCH
065 VALVE GV3 SUPPLY 699 ALARM(69) STRIKE 3 NO PROOF GAS VALVE GV3 HEAT SECT 2 CHECK IGNITION CONTROL, FLAME PROOF, GV3, GAS SUPPLY 70 72 Reserved CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS LIGHTS AND WIRING 74 ALARM(74) ZONE SENSOR A2 CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS LIGHTS AND WIRING 75 SENSOR RT17 CHECK SENSOR AND WIRING 76 ALARM(74) DUDOOR TEMP CHECK SENSOR AND WIRING 76 ALARM(74) HUMIDITY SENSOR A2 CHECK SENSOR AND WIRING 77 SENSOR RT16 CHECK SENSOR AND WIRING 78 SENSOR RT16 CHECK SENSOR AND WIRING 78 SENSOR RT16 CHECK SENSOR AND WIRING 79 LEM CHECK SENSOR AND WIRING 79 LEM CHECK SENSOR AND WIRING 79 LEM CHECK SENSOR AND WIRING 70 ALARM(79) DDD-ON BOARD PROB- LEM ADD-ON BAD PROBLEM, RESET TO CLEAR 80 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BAD PROBLEM 70 LEM CHECK HEHEAT SETTINGS 71 RESERVED CHECK HUMIDITROL SETTINGS	67		HEAT SECT 2 OFF CHECK COMBUSTION AIR MOTOR & PROOF SWITCH
Bits GAS VALVE GV3 SUPPLY 70- 72 Reserved - 73 ROR - 74 ALARM(73) NETWORK SENSOR R2 CHECK ZONE SENSOR AND WIRING - 74 ALARM(74) ZONE SENSOR A2 CHECK ZONE SENSOR AND WIRING - 75 SENSOR RT17 CHECK SENSOR AND WIRING 76 ALARM(76) OUTDOOR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 77 ALARM(77) DISCHARGE AIR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 78 ALARM(77) DISCHARGE AIR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 79 LEM CHECK SENSOR AND WIRING 79 LEM CHECK SENSOR AND WIRING 79 LEM ADD-ON BOARD PROB- ELM ADD-ON BOARD PROB- ADD-ON BRD PROBLEM, RESET TO CLEAR 80 LEM ADD-ON BOARD PROB- BLEM ADD-ON BOARD PROB- ADD-ON BRD PROBLEM 81 ALARM(81) REHEAT SETUP ERROR CHECK CONFIGURATION CHECK 82 ALARM(81) INCORRECT SETTINGS CHECK HUMIDITROL SETTINGS CHECK CONFIGURATION 84 Reserved CHECK HUMIDITROL SETTINGS CHECK ATARM(80) CONTROLLER PROB- LEM CHE	68		
72 Heserved 73 ALARM(73) NETWORK SENSOR ER- ROR CHECK WITH INTEGRATOR FOR REFRESH RATE, NETWORK STATUS LIGHTS AND WIRING 74 ALARM(74) ZONE SENSOR A2 CHECK ZONE SENSOR AND WIRING 75 ALARM(75) OUTDOOR TEMP SENSOR RT17 CHECK SENSOR AND WIRING 76 ALARM(76) HUMIDITY SENSOR A91 CHECK SENSOR AND WIRING 77 ALARM(77) RETURN AIR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 78 SENSOR RT6 CHECK SENSOR AND WIRING 79 ALARM(79) RETURN AIR TEMP SENSOR RT16 CHECK SENSOR AND WIRING 79 ALARM(79) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO CLEAR 80 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM 81 ALARM(81) INCORRECT SETTINGS CHECK CONFIGURATION 84 Reserved CHECK HUMIDITROL SETTINGS 86 ALARM(80) INCORRECT HU- MIDITROL SETTINGS CHECK CONFIGURATION 86 ALARM(80) CONTROLLER RESET CHECK SENSOR SIMULTANEOUS HEAT AND COOL AND WIRING 87 Reserved CHECK CONTROLLER PROBLEM. RESET TO CLEAR. 88 ALARM(80) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 91 ALARM(90) CONTROLLER PROB- LE	69		
74 ALARM(74) ZONE SENSOR A2 CHECK ZONE SENSOR AND WIRING 74 ALARM(75) OUTDOOR TEMP SENSOR RT17 CHECK SENSOR AND WIRING 75 ALARM(75) OUTDOOR TEMP SENSOR RT17 CHECK SENSOR AND WIRING 76 ALARM(76) HUMIDITY SENSOR A91 CHECK SENSOR AND WIRING 77 ALARM(77) DISCHARGE AIR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 78 ALARM(78) RETURN AIR TEMP SENSOR RT16 CHECK SENSOR AND WIRING 79 LEM CHECK SENSOR AND WIRING 80 ALARM(79) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO CLEAR 80 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM 81 ALARM(80) NCORRECT SETTINGS CHECK CONFIGURATION 82 ALARM(80) INCORRECT SETTINGS CHECK CONFIGURATION 84 Reserved CHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING 85 ALARM(80) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 88 ALARM(80) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 89 Reserved INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 91 ALARM(80) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.		Reserved	
75 ALARM(75) OUTDOOR TEMP SENSOR RT17 CHECK SENSOR AND WIRING 76 ALARM(76) HUMIDITY SENSOR A91 CHECK SENSOR AND WIRING 77 ALARM(77) DISCHARGE AIR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 78 ALARM(76) RETURN AIR TEMP SENSOR RT16 CHECK SENSOR AND WIRING 79 LEM CHECK SENSOR AND WIRING 79 ALARM(79) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO CLEAR 80 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM 81 ALARM(81) REHEAT SETUP ERROR CHECK CONFIGURATION 82 ALARM(82) CONTROLLER RESET NO ACTION NEEDED 83 ALARM(83) INCORRECT HU- MIDITROL SETTINGS CHECK HUMIDITROL SETTINGS 84 Reserved CHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING 85 ALARM(88) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 89 Reserved INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 89 ALARM(91) OUTDO	73		
75 SENSOR RT17 CHECK SENSOR AND WIRING 76 ALARM(72) HUMIDITY SENSOR A91 CHECK SENSOR AND WIRING 77 ALARM(72) NECHARGE AIR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 78 ALARM(73) RETURN AIR TEMP SENSOR RT16 CHECK SENSOR AND WIRING 79 ALARM(79) ADD-ON BOARD PROB- LEM CHECK SENSOR AND WIRING 80 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO CLEAR 81 ALARM(80) ADD-ON BOARD PROB ADD-ON BRD PROBLEM 82 ALARM(82) CONTROLLER RESET NO ACTION NEEDED 83 ALARM(82) CONTROLLER RESET NO ACTION NEEDED 84 Reserved CHECK HUMIDITROL SETTINGS 85 ALARM(88) INCORRECT HU- MIDITROL SETTINGS CHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING 86 PUT WIRING CHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING 87 Reserved INTERNAL CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 89 Reserved INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 80 ALARM(90) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 81 ALARM(90) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 82 ALARM(90) CONTROLLER PROB- LEM CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND	74	ALARM(74) ZONE SENSOR A2	CHECK ZONE SENSOR AND WIRING
77 ALARM(77) DISCHARGE AIR TEMP SENSOR RT6 CHECK SENSOR AND WIRING 78 ALARM(78) RETURN AIR TEMP SENSOR RT16 CHECK SENSOR AND WIRING 79 ALARM(79) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO CLEAR 80 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO CLEAR 81 ALARM(80) REHEAT SETUP ERROR CHECK REHEAT SETTINGS 82 ALARM(82) CONTROLLER RESET NO ACTION NEEDED 83 ALARM(82) INCORRECT SETTINGS CHECK CONFIGURATION 84 Reserved CHECK HUMIDITROL SETTINGS 86 ALARM(86) INCORRECT HU- MDITROL SETTINGS CHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING 87 Reserved INTERNAL CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 88 ALARM(80) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 90 ALARM(90) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 91 ALARM(91) OUTDOOR ENTH SENSOR A7 CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING 92 ALARM(92) INDOOR ENTH SENSOR A62 CHECK COM LOSS WITH NETWORK SENSOR 94 ALARM(94) BAD ZONE SENSOR CHECK SETPOINT AND EMS PROGRAMMING	75		CHECK SENSOR AND WIRING
77 SENSOR RT6 CHECK SENSOR AND WIRING 78 ALARM(78) RETURN AIR TEMP SENSOR RT16 CHECK SENSOR AND WIRING 79 ALARM(79) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM, RESET TO CLEAR 80 ALARM(80) ADD-ON BOARD PROB- LEM ADD-ON BRD PROBLEM 81 ALARM(81) REHEAT SETUP ERROR CHECK REHEAT SETTINGS 82 ALARM(83) INCORRECT SETTIP ERROR CHECK CONFIGURATION 83 ALARM(83) INCORRECT SETTINGS CHECK CONFIGURATION 84 Reserved CHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING 85 ALARM(86) CONFLICTING TSTAT IN- PUT CHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING 86 ALARM(88) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 89 Reserved INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 89 Reserved INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 90 ALARM(90) CONTROLLER PROB- LEM INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 91 ALARM(91) OUTDOOR ENTH SENSOR A7 INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. 91 ALARM(91) OUTDOOR ENTH SENSOR A7 CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING 93 ALARM(92) INDOOR ENT	76	ALARM(76) HUMIDITY SENSOR A91	CHECK SENSOR AND WIRING
78SENSOR RT16CHECK SENSOR AND WIRING79LAARM(79) ADD-ON BOARD PROB- LEMADD-ON BRD PROBLEM, RESET TO CLEAR80ALARM(80) ADD-ON BOARD PROB- LEMADD-ON BRD PROBLEM81ALARM(81) REHEAT SETUP ERRORCHECK REHEAT SETTINGS82ALARM(82) CONTROLLER RESETNO ACTION NEEDED83ALARM(83) INCORRECT SETTINGSCHECK CONFIGURATION84ReservedCHECK HUMIDITROL SETTINGS85ALARM(85) INCORRECT HU- MIDITROL SETTINGSCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING86ALARM(86) CONFLICTING TSTAT IN- PUTCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING87ReservedINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR. LEM88ALARM(86) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK COMM LOSS WITH NETWORK SENSOR94ALARM(93) BACKUP MODECHECK SETPOINT AND EMS PROGRAMMING95ALARM(94) BAD ZONE SENSOR SETTINGS HAVE SETTINGS HAVE CHANGED AT THE UNIT96ReservedSETTINGS HAVE SETTINGS HAVE SETTINGS HAVE CHANGED AT THE UNIT	77		CHECK SENSOR AND WIRING
79LEMADD-ON BAD PROBLEM, RESET TO CLEAR80ALARM(80) ADD-ON BOARD PROB- LEMADD-ON BRD PROBLEM81ALARM(81) REHEAT SETUP ERRORCHECK REHEAT SETTINGS82ALARM(82) CONTROLLER RESETNO ACTION NEEDED83ALARM(83) INCORRECT SETTINGSCHECK CONFIGURATION84Reserved85ALARM(85) INCORRECT HU- MIDTROL SETTINGSCHECK HUMIDITROL SETTINGS86ALARM(86) CONFLICTING TSTAT IN- PUTCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING87Reserved88ALARM(80) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK COMM LOSS WITH NETWORK SENSOR93ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(96) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96ReservedSETTINGS HAVE CHANGES	78		CHECK SENSOR AND WIRING
80LEMADD-ON BRD PROBLEM81ALARM(81) REHEAT SETUP ERRORCHECK REHEAT SETTINGS82ALARM(82) CONTROLLER RESETNO ACTION NEEDED83ALARM(83) INCORRECT SETTINGSCHECK CONFIGURATION84Reserved85ALARM(85) INCORRECT HU- MIDITROL SETTINGSCHECK HUMIDITROL SETTINGS86ALARM(86) CONFLICTING TSTAT IN- PUTCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING87Reserved88ALARM(86) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR AC2CHECK COM LOSS WITH NETWORK SENSOR94ALARM(93) BACKUP MODECHECK COM LOSS WITH NETWORK SENSOR94ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	79		ADD-ON BRD PROBLEM, RESET TO CLEAR
82ALARM(82) CONTROLLER RESETNO ACTION NEEDED83ALARM(83) INCORRECT SETTINGSCHECK CONFIGURATION84Reserved85ALARM(85) INCORRECT HU- MIDITROL SETTINGSCHECK HUMIDITROL SETTINGS86ALARM(86) CONFLICTING TSTAT IN- PUTCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING87Reserved88ALARM(88) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK COM LOSS WITH NETWORK SENSOR93ALARM(93) BACKUP MODECHECK COM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR SETTINGS HAVE CHANGESCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96ReservedSETTINGS HAVE CHANGED AT THE UNIT	80		ADD-ON BRD PROBLEM
83ALARM(83) INCORRECT SETTINGSCHECK CONFIGURATION84Reserved	81	ALARM(81) REHEAT SETUP ERROR	CHECK REHEAT SETTINGS
84Reserved85ALARM(85) INCORRECT HU- MIDITROL SETTINGSCHECK HUMIDITROL SETTINGS86ALARM(86) CONFLICTING TSTAT IN- PUTCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING87Reserved88ALARM(88) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94SALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96ReservedSETTINGS HAVE CHANGED AT THE UNIT	82		
85ALARM(85) INCORRECT HU- MIDITROL SETTINGSCHECK HUMIDITROL SETTINGS86ALARM(86) CONFLICTING TSTAT IN- PUTCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING87Reserved88ALARM(88) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR SETTINGS HAVE CHANGESCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96ReservedSETTINGS HAVE CHANGED AT THE UNIT	83		CHECK CONFIGURATION
85MIDITROL SETTINGSCHECK HOMIDITROL SETTINGS86ALARM(86) CONFLICTING TSTAT IN- PUTCHECK TSTAT INPUTS FOR SIMULTANEOUS HEAT AND COOL AND WIRING87Reserved88ALARM(88) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR CHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	84		
80PUTWIRING87Reserved88ALARM(88) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	85	MIDITROL SETTINGS	CHECK HUMIDITROL SETTINGS
88ALARM(88) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	86		
88LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.89Reserved90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	87		
90ALARM(90) CONTROLLER PROB- LEMINTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING94ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR SETPOINT94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	88	LEM	INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.
90LEMINTERNAL CONTROLLER PROBLEM. RESETTO CLEAR.91ALARM(91) OUTDOOR ENTH SENSOR A7CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	89		
91SENSOR Á7WIRING92ALARM(92) INDOOR ENTH SENSOR A62CHECK ECON DIP SWITCH AND ENTH DIAL SETTINGS, SENSOR AND WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	90		INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.
92A62WIRING93ALARM(93) BACKUP MODECHECK COMM LOSS WITH NETWORK SENSOR94ALARM(94) BAD ZONE SENSOR SETPOINTCHECK SETPOINT AND EMS PROGRAMMING95ALARM(95) SETTINGS HAVE CHANGESSETTINGS HAVE CHANGED AT THE UNIT96Reserved	91		
94 ALARM(94) BAD ZONE SENSOR SETPOINT CHECK SETPOINT AND EMS PROGRAMMING 95 ALARM(95) SETTINGS HAVE CHANGES SETTINGS HAVE CHANGED AT THE UNIT 96 Reserved End of the content of t	92		
94 SETPOINT CHECK SETPOINT AND EWS PROGRAMMING 95 ALARM(95) SETTINGS HAVE CHANGES SETTINGS HAVE CHANGED AT THE UNIT 96 Reserved SETTINGS HAVE CHANGED AT THE UNIT	93	ALARM(93) BACKUP MODE	CHECK COMM LOSS WITH NETWORK SENSOR
95 CHANGES SETTINGS HAVE CHANGED AT THE UNIT 96 Reserved	94		CHECK SETPOINT AND EMS PROGRAMMING
96 Reserved	95		SETTINGS HAVE CHANGED AT THE UNIT
97 Reserved	96		
	97	Reserved	

Code	Display Message	Action
98	ALARM(98) CONTROLLER PROB- LEM	INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.
99	ALARM(99) OUTDOOR ECON SENSOR A24	CHECK SENSOR AND WIRING
100	ALARM(100) AIR VOL CONTROL SETUP ERROR	CHECK FOR PROPER INSTALLATION OF GP BOARD AND SETTINGS
101	ALARM(101) MGV CONTROL SETUP ERROR	CHECK FOR PROPER INSTALLATION OF GP BOARD AND SETTINGS
102	ALARM(102) GP CONTROL SETUP ERROR	CHECK FOR PROPER INSTALLATION OF GP BOARD AND SETTINGS
103	ALARM(103) ADVANCED CONTROL SETUP ERROR	CHECK PRODIGY SETTINGS
104	Reserved	
105	ALARM(105) ADVANCED ECON CONTROL SETUP ERROR	CHECK ECON SWITCHES, DIALS, AND PRODIGY SETTINGS
106	ALARM(106) BUILDING PRESS SENSOR A34	CHECK SENSOR AND WIRING
107	ALARM(107) DUCT SUPPLY PRESS SENSOR A30	CHECK SENSOR AND WIRING
108	ALARM(108) DUCT SUPPLY HIGH PRESS SENSOR A30	CHECK SENSOR AND WIRING
109	ALARM(109) STRIKE 3 DUCT SUP- PLY PRESS SENSOR A30	CHECK SENSOR AND WIRING
110	ALARM(110) WAITING ON NET- WORK DATA	CHECK NETWORK OR COMFORT SENSOR AND WIRING
111	ALARM(111) CONTROLLER PROB- LEM	INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.
112	ALARM(112) CONTROLLER PROB- LEM	INTERNAL CONTROLLER PROBLEM. RESET TO CLEAR.
113	Reserved	
114	ALARM(114) CONTROLLER PROB- LEM	POWER NOISE PROBLEM. RESET TO CLEAR.
115	ALARM(115) UNIT OFFLINE FOR TEST	CHECK PRODIGY SERVICE TEST MODE
116	Reserved	
117	Reserved	
118	ALARM(118) NO DISPLAY	DISPLAY NOT DETECTED
119	STATUS(119) RESET CAUSED BY WATCHDOG TIMEOUT	CONTACT LENNOX
120	ALARM(120) ADD-ON BOARD MCB PROBLEM	MCB CONFIGURATION SETUP PROBLEM. RESET TO CLEAR OR AD- VANCED SETUP.
121	ALARM(121) LINE FREQ DOES NOT MATCH UNIT CONFIG	
122	ALARM(122) 24VAC PRIMARY VOLTAGE LOW	
123	ALARM(123) 24VAC PRIMARY VOLTAGE HIGH	
124	ALARM(124) 24VAC SECONDARY VOLTAGE LOW	
125	ALARM(125) 24VAC SECONDARY VOLTAGE HIGH	
126	ALARM(126) LINE PHASING DOES NOT MATCH UNIT CONFIG	
127	Reserved	
128	ALARM(128) 24VAC POWER LOSS	
129	Reserved	

17. Electronic Configure To Order (ECTO) Control Parameters

Many M2 main control operations may be varied within a set range. Default settings are based on common or average applications; change ECTO settings only when custom applications, preferences or local building codes exist. Default, minimum, and maximum range settings are found in table 41.

NOTICE: Units with Novar 2051 module!

Failure to perform the following steps may result in unsatisfactory unit operation.

- 1. Prior to changing ECTO's, unplug the Novar phone cable to M2 sysbus.
- 2. When ECTO changes are complete, return DB1 to DISPLAY mode and reconnect the Novar phone cable.

ECTO parameters may be changed two different ways:

- using the Prodigy Display
- using an optional PC Unit Controller (UC) software

17.1. Using the Prodigy Display

Set ECTOs using Prodigy menu, SETTINGS > CONTROL > ECTO. Refer to the Prodigy Installation and Setup Guide. The parameters are set up in ten different blocks or groups. The first digit of each parameter indicates the block as follows:


- 0- VAV/CAVB
- 1- heat pump heating
- 2- electric heating
- 3- gas heating
- 4- cooling
- 5- miscellaneous
- 6- system 1
- 7- system 2
- 8- system 3
- 9- GP board

An M2 board configured for a gas heating unit will skip heat pump block 1 and electric heating block 2 readouts. An M2 board configured for an electric heating unit will skip heat pump block 1 and gas heating block 3 readouts. An M2 board configured for a heat pump unit will skip electric heating block 2 and gas heating block 3 readouts.

17.2. Reset To Factory ECTO Parameters

To restore the factory ECTO parameters, refer to the Prodigy Installation and Setup Guide.

17.3. Unit Controller PC Software

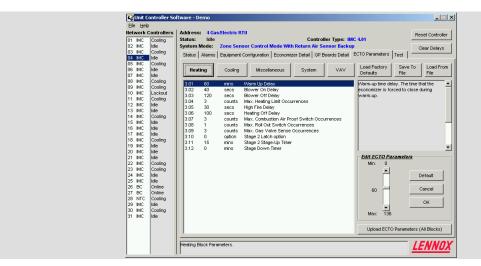

The L connection unit controller PC software is recommended when adjusting multiple ECTO parameters. Unit controller PC software allows the user to adjust parameters using real units (no conversion from display readout). PC software is faster than using the push-button/display interface on the M2 board.

In addition, the PC software allows the user to save unit configuration files. The saved file can be used to apply the same settings to other units.

The unit controller software can directly access a unit by plugging into the M2 board phone jack and connecting to a serial port using a PC converter. Any unit on the same daisy-chained network can be adjusted from any unit M2 board or the NCP. A LAN Ethernet converter and phone modem are also available for remote connections.

Cont	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
A BO	OX 3-5 ton	l				Parameters
0.01	Supply_VAV_ Control_Mode	0	0 (6 ton) 64 (3,4,5 ton Std Eff) 68 (3 ton High Eff) 72 (4 ton High Eff) 76 (5 ton High Eff)	255	Option	Supply VAV control mode selection by weight: 4 - MCB 3 ton direct drive 8 - MCB 4 ton direct drive 12 - MCB 5 ton direct drive 16 - MCB indoor blower high speed when running on OCP 32 - MCB indoor blower high speed when running on G 64 - MCB exists
0.02	VAV_SMK_ Stg_Output	0 0	55 (3,4,5 ton Std Eff) 55 (3 ton High Eff) 80 (4 ton High Eff) 59 (5 ton High Eff)	100 100	Counts P: %	Blower staged % output during smoke detection.
0.04	VAV_HT_ Stg_Output	0 0	55 (3,4,5 ton Std Eff) 55 (3 ton High Eff) 80 (4 ton High Eff) 59 (5 ton High Eff)	100 100	P: %	Blower staged % output high speed; used for heating and high cooling or ventilation.
0.05	VAV_CL_ Stg_1_Output	0 0	28 (3,4,5 ton Std Eff) 28 (3 ton High Eff) 40 (4 ton High Eff) 36 (5 ton High Eff)	100 100	P: %	Blower staged % output low speed; used for low cooling or ventilation.
0.09	Min_Damper_ Position_ Low_BLR	0 0	30 30	100 100	P: %	Minimum damper position during low speed blower operation. Use ECTO 5.24 during high speed blower operation
0.27	Free_CL_Stg_ Up_Delay	0 0	38 304	255 2040	Counts C: Sec	Free cooling blower stage-up delay. Blower runs low speed during delay, and then shifts to high speed. Set to 0 for immediate high speed, or XXX to stay in low speed.
A (6	ton), B, C, D	, & E	BOXES Block 0	VAV, (CAVB, &	MSAV Parameters
0.01	Supply_VAV_ Control_Mode	0	0	63	Option	 Add the weights for each control description to determine option. Weight- Description 1- GP1 board present, DIP set to VAV mode for VAV or CAVB control action. 2- VAV control action. 0 for CAVB control action. See table 29. The following weights are used for VAV: 4- PID control when smoke detected. 0 for staged 8- PID control when running ventilation. 0 for staged. 16- PID control when running heating. 0 for staged For VAV control action, either PID or staged control can be selected. For CAVB control action, PID is automatically used. (Staged is not available for CAVB). Configuration alarm will occur if GP board (W/DIP set to VAV) is installed and at least one of the following ECTO parameters value are not set to non-zero: ECTO 0.01, 0.23 or 8.16
0.02	VAV_Press_ SMK_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	VAV supply static pressure set point during smoke detection.
	 VAV_SMK_ Stg_Output	0	51	100	P: %	VAV staged % output during smoke detection.
0.03	VAV_Press_ Vent_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	VAV supply static pressure set point during ventilation.
	VAV_VT_Stg_ Output	0	51	100	P:%	VAV staged % output during ventilation and economizer free cooling.
0.04	VAV_Press_ HT_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	VAV supply static pressure set point during heating.
	VAV_HT_Stg_O utput	0	51	100	P:%	VAV staged % output during heating.
0.05	VAV_Press_ CL_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	VAV supply static pressure set point during cooling.
	VAV_CL_Stg_1 _ Output	0	51	100	P:%	VAV staged % output while cooling compressor 1 is on.

Table 41. M2 ECTO Control Parameters

Cont	rol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
B, C	, D, & E BOX	ES	Block 0 VAV,	CAVB,	& MSAV	Parameters (continued)
0.06	VAV_Min_Out- put_for_CL_ VT_SMK	30 30	50 50	100 100	Counts P:%	VAV supply minimum output for cooling, ventilation or smoke. If minimum is >= manual reset (ECTO 0.09), then manual reset used is shifted to (ECTO 0.06 + ECTO 0.08) / 2
0.07	VAV_Min_Out- put_for_HT	30 30	50 50	100 100	Counts P:%	VAV supply minimum output for heating. If minimum is >= manual reset (ECTO 0.09), then manual reset used is shifted to (ECTO 0.07 + ECTO 0.08) / 2
0.08	VAV_Max_Out- put	40 40	100 100	100 100	Counts P:%	VAV supply maximum output.
0.09	VAV_PID_ ManRS	0 0	60 60	100 100	Counts P:%	VAV supply PID manual reset value. If minimum output, ECTO 0.06 or 0.07 is greater, a computed ManRS value is used. See ECTO 0.06 and 0.07.
0.10	PID_P_Con- stant	0	17	127	Counts	VAV or CAVB supply PID Proportional constant.
0.11	PID_I_ Constant	0	12	127	Counts	VAV or CAVB supply PID Integral constant.
0.12	PID_D_ Constant	0	0	127	Counts	VAV or CAVB supply PID derivative constant.
0.13	CAVB_SMK_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	Constant air volume with bypass damper static pressure set point during smoke alarm.
0.14	CAVB_VT_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	Constant air volume with bypass damper static pressure set point for ventilation.
	VAV_CL_Stg_2 _Output	0	51	100	P:%	VAV staged % output while cooling compressors 1 and 2 are on.
0.15	CAVB_HT_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	Constant air volume with bypass damper static pressure set point for heating
	VAV_CL_Stg_3 _Output	0	51	100	P:%	VAV staged % output while cooling compressors 1, 2, and 3 are on.
0.16	CAVB_CL_SP	0 0	51 1.00	255 5.0	Counts N:"w.c.	Constant air volume with bypass damper static pressure set point for cooling
	VAV_CL_Stg_4 _Output	0	51	100	P:%	VAV staged % output while cooling compressors 1, 2, 3, and 4 are on.
0.17	CAVB_Min_ Output_for CL_VT_SMK	20 20	20 20	100 100	Counts P:%	Constant air volume with bypass damper minimum output for cooling, ventilation and during smoke alarms. This sets the minimum air delivered. Bypass damper motor is set to 10 to 2 volts with 10 v being closed. 20% setting = 2 volts or damper completely opened.
0.18	CAVB_Min_ Output_ for_HT	20 20	20 20	100 100	Counts P:%	Constant air volume with bypass damper minimum output for heating. This sets the minimum air delivered. Bypass damper motor is set to 10 to 2 volts with 10 v being closed. 20% setting = 2 volts or damper completely opened.
0.19	CAVB_ Max_output	40 40	100 100	100 100	Counts P:%	Constant air volume with bypass damper maximum output. This sets the maximum air delivered. Bypass damper motor is set to 10 to 2 volts with 10 v being closed. 100% setting = 10 volts or damper completely closed.
0.20	CAVB_ ManRS	20 20	52 52	100 100	Counts P:%	Constant air volume with bypass damper manual reset value output. This is the output when unit is off.
0.21	Static_ Shut- down_SP	0 0	102 2.0	255 5.0	Counts N:"w.c.	Supply static shutdown set point. Unit will shutdown for ECTO 5.02 minutes if duct pressure exceeds this value for 20 seconds.
0.22	Static_Lock- out Counts	0	3	8	Counts	The number of occurrences before permanent lockout. Counter re- sets when M2 resets. A value of 0 will disable lockout.

Cont	rol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
B , C	, D, & E BOX	ES	Block 0 VAV,	CAVB,	& MSAV	Parameters (continued)
0.23	DO_Mode_ A133_(VAV mode)	0	0	127	Option	A133 (w/DIP set to VAV) Digital Out Mode = X + 32*Y + 16*Z Input source= X: 0 None. Output enables exhaust fan stage 2. 1 Compressor 1 duty cycle. (Compressor crankcase heater func- tion.) On when OAT <= ECTO 0.24 and >= ECTO 0.25 seconds have passed with compressor 1 off. Off when OAT > ECTO 0.24 + 3 deg F (fixed dead-band) or < ECTO 0.25 sec have passed with compressor 1 off. 2 On when occupied. 3 On when blower on. 4 On when heating demand. 5 On when heating or cooling demand. 6. On when heating or cooling demand. 5 On when heating or cooling demand. 6. On when heating or cooling demand. 7 System OAT (A55_P298_5 RH) 8 System OAT (A55_P298_3 IAQ) 9 System OAT (A55_P297_1/2 OAT) 10 A11. (A133_P194-6). 11 A12. (A133_P194-7). 12 A13. (A133_P194-7). 13 A14. (A133_P194-7). 14 AO1. (A133_P194-7). 15 AO2. (A133_P194-7). 14 AO1. (A133_P194-7). 15 AO2. (A133_P194-7). 16 AI3. (A133_P194-7). 17 A12. (A133_P194-7). 18 AV4. (A133_P194-7). 19 A14. (A133_P194-7). 10 A11. (A133_P194-7). 12 A13. (A133_P194-7). 13 A14. (A133_P194-7). 14 AO1. (A133_P194-7). 15 AO2. (A133_P194-7). 15 AO2. (A133_P194-7). 16 AU3. (A133_P194-7). 17 AD3. (A133_P194-7). 18 AV4. (A133_P194-7). 19 A13. (A133_P194-7). 19 A14. (A133_P194-7). 10 A11. (A133_P194-7). 10 A11. (A133_P194-7). 12 A13. (A133_P194-7). 13 A14. (A133_P194-7). 14 AO1. (A133_P194-7). 15 AO2. (A133_P194-7). 15 AO2. (A133_P194-7). 16 A01. (A133_P194-7). 17 AD3. (A133_P194-7). 19 A14. (A133_P194-7). 19 A14. (A133_P194-7). 10 A11. (A133_P194-7). 10 A11. (A133_P194-7). 10 A11. (A133_P194-7). 12 A13. (A133_P194-7). 13 A14. (A133_P194-7). 14 AO1. (A133_P194-7). 15 AO2. (A133_P194-7). 15 AO2. (A133_P194-7). 16 (Fixed 3-count hysteresis loop on rising and falling edges of window.) 2 Delayed-onf. On when input is >= ECTO 0.24 - 3. (Fixed 3-count hysteresis loop on edge.) 10 A11. (A134_Count hysteresis loop on edge.) 10 A11. (A134_Count hysteresis loop on edge.) 10 A12. (A134_Count hysteresis loop on edge.) 10 A12. (A134_Count
0.24	DO_SP_ A133_ (VAV mode)	0 0 0 132 05 0	127 5.0 996 100 51 0 2.5	255 10.0 2000 100 -31 0.5 5.0	Counts R:Volts I:ppm P:% Y:DegF M:"w.c. N:"w.c.	A133 (w/DIP set to VAV) digital output mode set point
0.25	DO_DB_A133_ (VAV mode)	2 0 16 2 1 64 0.01 0	13 .50 102 13 8 416 0.05 .25	255 10.0 2000 100 162 8160 1.0 5.0	Counts R:Volts I:ppm P:% O:DegF D:Sec. L:"w.c. N:"w.c.	A133 (w/DIP set to VAV) digital output mode dead-band or delay.
0.26	Supply_Static- Sensor_Low_ Alarm_Check	30 30	40 40	101 101	Count P:%	Supply Static Pressure Sensor (A30) connected at (A133_P195_6) (TB18_6) alarm threshold. Blower percent speed before checking sensor after a 20 second delay. A value of 101 disables the low threshold or "open" alarm trap.

Con	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 1	Heat	Pump He	eating Parameters
1.01	WmUp_Delay	28 896	56 1792	255 8160	Counts D:Sec.	Warm-up time delay. The time that the supplemental heat is held off during the first demand of warm-up. This parameter is only used if the parameter 1.17 is set to option 1.
1.02	BL_On_Delay	0 0	0 0	15 60	Counts B:Secs	Blower on delay. The time before the blower turns on after a heating demand.
1.03	BL_Off_Delay	0 0	5 20	75 300	Counts B:Secs	Blower off delay. The time the blower stays on after the heating de- mand is lost
1.04	Max_HT_ LT_ Occurrences	1	5	15	Counts	Service output activation. Maximum Primary and Secondary Limit occurrences stored before service relay is energized. If max value is set, service output is disabled. Note: Heating stage is not locked out.
1.05	Sup_HT_Stg_ Delay	3 12	3 12	15 60	Counts B:Secs	Time delay between 1 & 2 stage of supplemental heat.
1.06	Sup_HT_2_ Lockout_Temp.	113 60	160 30	175 20	Counts Y:DegF	Temperature set point for lockout for the second bank of supplemental heat. Note: Temperature must be < or = to ECTO 1.07.
1.07	Sup_HT_1_ Lockout_Temp.	113 60	144 40	175 20	Counts Y: Deg.	Temperature set point for lockout of first bank of supplemental heat. Note: Temperature must be = to or > ECTO1.06.
1.08	Compr_1_ Low_Temp_ Lockout	81 80	255 -31	254 -30	Counts Y: Deg.	Low ambient lockout for compressor 1. 254 value equals -30 °F (-34°C). A value of 255 (-31°F) will disable low ambient lockout function. Note: This lockout is for heating only. Temperature must be < or = 1.09.
1.09	Compr_2_ Low_Temp_ Lockout	81 80	255 -31	254 -30	Counts Y: Deg.	Low ambient lockout for compressor 2. 254 value equals -30 °F (-34°C). A value of 255 (-31°F) will disable low ambient lockout function. Note: This lockout is for heating only. Temperature must be > or = 1.08.
1.10	Compr_Min_ Off_Delay	30 60	150 300	255 510	Counts A:Sec	Compressor minimum off delay. Used on 1 PH units. Also used on all units after an alarm occurs.
1.11	Compr_Min_ Run_Time	30 60	120 240	255 510	Counts A:Sec	Compressor minimum run time. Used on 3 PH units.
1.12	Max_HP_ Occurrences	1	3	8	Counts	Maximum High Pressure occurrences stored before control locks off compressor stage and energizes the service output. If max value is set, lock-out and service output features are disabled.
1.13	Max_LP_ Occurrences	1	3	8	Counts	Maximum Low Pressure occurrences stored before control locks off compressor stage and energizes the service output. If max value is set, lock-out and service output features are disabled.
1.14	Defrost_Sup_ HT_Option	0	1	1	Option	Defrost options: 0: No supplemental heating during defrost. 1: Supplemental heating on during defrost.
1.15	Min_Time_ Between _De- frost	1	2	3	Option	Minimum time allowed between defrost cycles. 1= 32 minutes 2= 64 minutes 3=96 minutes
1.16	Max_Defrost_ Time	2 10	3 15	5 25	Counts Min	Maximum defrost time allowed.
1.17	WmUp_Option	0	0	2	Option	 Warm-up mode option. Supplemental heat may be used during warm-up. Use depends on outdoor temperature. See ECTO 1.06 and 1.07. For the first demand cycle, lockout supplemental heat for the first 30 minutes (default). Time is adjustable by changing the parameter WARM-UP DLY # 1.01. For future use.
1.18	Sup_HT_1_ Diff	0 0	8 2	15 3.75	Counts W:DegF	Supplemental heat stage 1 differential. Used in zone sensor applica- tions. Note: Differential temperature must be = to or < ECTO 1.19.
1.19	Sup_HT_2_Diff	0 0	12 3	15 3.75	Counts W:DegF	Supplemental heat stage 2 differential. Used in zone sensor applica- tions. Note: Differential temperature must be = to or > ECTO 1.18
1.20	Sup_HT_1_ Latch_Option	0	0	1	Option	Supplemental heat stage 1 latch option. Used in zone sensor applica- tions. 0: Latch Disabled 1: Latch Enabled
1.21	Sup_HT_2_ Latch_Option	0	0	1	Option	Supplemental heat stage 2 latch option. Used in zone sensor applica- tions. 0: Latch Disabled 1: Latch Enabled

Con	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 1 Heat I	Pump	Heating	Parameters (continued)
1.22	Sup_HT_1_ StgUp_Timer	0 0	0 0	225 3600	Counts F:Sec	Supplemental heat stage 1 stage-up timer. The maximum time that stage 1 runs before calling supplemental heat stage 1. Used in zone sensor applications. Disabled if set to 0.
1.23	Sup_HT_2_ StgUp_Timer	0 0	0 0	225 3600	Counts F:Sec.	Supplemental heat stage 2 stage-up timer. The maximum time that supplemental heat 1 runs before calling supplemental heat stage 2. Used in zone sensor applications. Disabled if set to 0.
1.24	StgDn_Timer	0 0	19 304	225 3600	Counts F:Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.
1.25	Heat Pump Type	0	0	1	Option	0: Air Source Heat Pump 1: Reserved
			Block	2 Elec	tric Hea	ting Parameters
2.01	WmUp_Delay	0	112 3584	255 8160	Counts D:Sec	Warm-up time delay. The time that the economizer is forced closed during warm-up (first occupied +heat demand)
2.02	BL_On_Delay	0	0	0	Counts B:Secs	Blower on delay. The time before the blower turns on after a heating demand. Reserved for future use
2.03	BL_Off_Delay	0 0	5 20	75 300	Counts B:Secs	Blower off delay. The time the blower stays on after the heating de- mand is lost.
2.04	Max_HT_LT_ Occurrences	1	3	15	Counts	Service output activation. Maximum Primary and Secondary Limit occurrences stored before service relay is energized. If max value is set, service output is disabled. Note: Heating stage is not locked out
2.05	HT_Stg_Delay	3 12	3 12	15 60	Counts B:Secs	Time delay between heat stages.
2.06	Stg_Latch_ Option	0	0	1	Option	Stage latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled
2.07	StgUp_Timer	0 0	57 912	225 3600	Counts F:Sec	Stage up timer. The maximum time that lower stage runs before call- ing next heat stage. Used in zone sensor applications. Disabled if set to 0.
2.08	StgDn_Timer	0 0	0 0	225 3600	Counts F: Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.
			Bloc	k 3 Ga	as Heatii	ng Parameters
3.01	WmUp_Delay	0 0	112 3584	255 8160	Counts D: Sec.	Warm-up time delay. The time that the economizer is forced closed during warm-up (first occupied + heat demand).
3.02	BL_On_Delay	2 8	10 40	15 60	Counts B: Sec.	Blower on delay. The time before the blower turns on after a heating demand.
3.03	BL_Off_Delay	20 80	30 120	75 300	Counts B:Sec.	Blower off delay. The time the blower stays on after the heating demand is lost.
3.04	Max_Ht_LT_ Occurrences	1	3	15	Counts	Service relay activation. Maximum Primary and Secondary Limit occurrences stored before service relay is energized. If max value is set, service output is disabled. Note: Heating stage is not locked out.
3.05	High_Fire_ Delay	15 30	15 30	150 300	Counts A:Sec.	The minimum low fire time before high fire is allowed.
3.06	HT_Off_Delay	15 30	50 100	150 300	Counts A:Sec.	Heating off delay.
3.07	Max_CAI_ Proof_Switch_ Occurrences	1	3	6	Counts	Service relay activation. Maximum Combustion Air Inducer proof switch occurrences stored before service output is energized. If max value is set, service output is disabled. Note: Heating stage is not locked out.
3.08	Max_Roll_Out_ Switch_ Occurrences	1	1	4	Counts	Service output activation. Maximum Roll Out Switch occurrences stored before service relay is energized. If max value is set, ser- vice output disabled. Note: Heating stage is not locked out.
	Max_GV_ Sense_ Occurrences	1	3	6	Counts	Service output activation. Maximum Gas Valve Sense occurrences stored before service output is energized. If max value is set, service output is disabled. Note: Heating stage is not locked out.
3.09						Otomo latab antion, llagad in mana annualizations
3.09	Stg_Latch_Op- tion	0	0 57	1	Option	Stage latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled

Control Parameter			Control Value								
No.	Name	Min.	Default	Max.	Units	Description					
	Block 3 Gas Heating Parameters (continued)										
3.12	StgDn_Timer	0 0	0 0	225 3600	Counts F: Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.					
3.13	MGV_Control_ Mode	0	0	6	Option	 Modulating Gas Valve Mode A133 (GP1) not installed. A133 (GP1 w/DIP set to MGV) installed, but no MGV. Data log- ging only. Two-stage fire; min. or 100% (with or without low-fire FAH) 2 + modulating FAH Direct mode. Al1 (A133_P194-11) scaled to 0-100% and output on AO1. Al2 (A133_P194_12)scaled to 0-100% and output on AO2. DACH control; min. to maximum (with or without lo-fire FAH) 5 + modulating FAH Lighting sequence is followed for all modes; 2-6. See ECTO 3.14 and 3.15. 					
3.14	MGV_startup_ Phase2_delay	2 4	8 16	150 300	Counts A: Sec.	Modulating gas startup delay. At startup, run burners on low stage main gas valves(s) with MGV(s) at 100% for ECTO 3.05 seconds. Increase burners to high stage of main gas valve(s) with MGV(s) opened to ECTO 3.15 for ECTO 3.14 seconds. Begin PID or staged control of MGV(s).					
3.15	MGV_Max	60 60	80 80	100 100	Counts P:%	Modulating gas valve maximum.					
3.16	MGV_Min	0 0	20 20	100 100	Counts P:%	Modulating gas valve minimum.					
3.17	MGV_PID_ ManRS	0 0	50 50	100 100	Counts P:%	Modulating gas valve PID manual reset value.					
3.18	MGV_PID_P_ Constant	0	40	127	Counts	Modulating gas valve PID proportional constant.					
3.19	MGV_PID_I_ Constant	0	0	127	Counts	Modulating gas valve PID integral constant.					
3.20	MGV_PID_D_ Constant	0	0	127	Counts	Modulating gas valve PID derivative constant.					

Con	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 3 Ga	is Hea	ting Par	ameters (continued)
3.21	DO_ Mode_ A133 (MGV mode)	0	0	127	Option	 GP1 Digital Out Mode = X + 32*Y + 16*Z Input source= X: 0- None. 1- Compressor 1 duty cycle. (Compressor crankcase heater function.) On when OAT <= ECTO 3.22 and >= ECTO 3.23 seconds have passed with compressor 1 off. Off when OAT > ECTO3.22 + 3°F (fixed dad-band) or < ECTO 3.23 sec have passed with compressor 1 off. 2- On when occupied. 3- On when blower on, 4- On when heating demand. 5- On when neating demand. 6- On when heating or cooling demand. 6- On when heating or cooling demand. 6- On when heating or cooling demand. 7- System RIA (A55 P298 5 RH) 8- System OAT (A55 P267 1/2 OAT) 7- System RH (Either A55 P114-10 or network RH) 11- Al2 (A133 P194-7) (SP and DB set with ECTO3.22 & 3.23) 12- Al3 (A133 P194-9) (SP and DB set with ECTO3.22 & 3.23) 13- Al4 (A133 P194-1) (SP and DB set with ECTO3.22 & 3.23) 14- AO1 (A133 P194-1) 15- AO2 (A133 P194-12) Algorithm Y for input sources 7-15: 0- Hysteresis loop On when input is in range; >= ECTO 3.22 off when input is N range; >= ECTO 3.22 and <= ECTO 3.22 + ECTO 3.22 - 3. (Fixed 3-count hysteresis loop on rising and falling edges of window.) 2- Delayed-onf. On when input is >= ECTO 3.22 - 3. (Fixed 3-count hysteresis loop on edge.) 3- Delayed-off. On when input is <= ECTO 3.22 - 3. (Fixed 3-count hysteresis loop on edge.) Inversion Z: 0 - Output not inverted. 0 - Output not inverted. 0 - Output not inverted. 0 - Output intot inverted.
3.22	DO_SP_A133 (MGV mode)	0 0 0 132 -0.5 0	127 5.0 996 100 51 0 2.5	255 10.0 2000 100 -31 0.5 5.0	Counts R:Volts I:ppm P:% Y:DegF M:"w.c. N:"w.c.	A133 (w/DIP set to MGV) digital output mode set point
3.23	DO_DB_A133_(MGV mode)	2 0 16 2 1 64 0.01 0	13 .50 102 13 8 416 0.05 .25	255 10.0 2000 100 162 8160 1.0 5.0	Counts R:Volts I:ppm P:% O:DegF D:Sec. L:"w.c. N:"w.c.	A133 (w/DIP set to MGV) digital output mode dead-band or delay.

Con	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			BI	ock 4	Cooling	Parameters
4.01	CoolDn_Delay	0 0	56 1792	255 8160	Counts D:Sec.	Cool down tine delay. Time that Y2 is ignored during cool down period (when first occupied + cool demand) This delay is only used if an economizer is used and the outdoor air is suitable.
4.02	BL_On_Delay	0 0	0 0	15 60	Counts B:Sec.	Blower on delay. The time before the blower turns on after a cooling demand.
4.03	BL_Off_Delay	0 0	0 0	60 240	Counts B:Sec.	Blower off delay. The time the blower stays on after the cooling de- mand is lost.
4.04	Max_Frz_Stat_ Occurrences	1	3	5	Counts	Service output activation and compressor lockout. Maximum Freeze Stat occurrences stored before service relay is energized and com- pressor is locked-out. If value (4 or 5) is set, service output is dis- abled and compressor is not locked-out. If value 5 is set, alarms are not stored, but only displayed as they occur.
4.05	Cond_Fan_ ReStart_ Delay	0 0	3 6	8 16	Counts A:Sec.	Low ambient anti-windmilling condenser fan delay. The time period that the last operating fan is turned off before starting the next fan.
4.06	LAC_SP_ Temp_ 1	113 60	144 40	191 10	Counts Y:DegF	Low ambient outdoor air limit temp. 1. Parameters 4.06 and 4.07 are used to shed fans. See Operation section. Temperature setting must be $<$ or = 4.07.
4.07	LAC_SP_ Temp_2	113 60	120 55	191 10	Counts Y:Deg.F	Low ambient outdoor air limit temp. 2. Parameters 4.06 and 4.07 are used to shed fans. See Operation section. Temperature setting must be > or = 4.06 .
4.08	Com- pr_1_Low_Temp Lockout	81 80	207 0	255 -31	Counts Y:DegF	Low ambient lockout for compressor 1. A value of 255 (-31°F) will disable low ambient lockout function. Temperature setting must be < or = 4.09 .
4.09	Com- pr_2_Low_Temp _ Lockout	81 80	207 0	255 -31	Counts Y:Deg.F	Low ambient lockout for compressor 2. A value of 255 (-31F) will disable low ambient lockout function. Temperature setting must be $>$ or = 4.08 AND $<$ or = 4.10.
4.10	Com- pr_3_Low_Temp Lockout	81 80	207 0	255 -31	Counts Y:DegF	Low ambient lockout for compressor 3. A value of $255(-31F)$ will disable low ambient lockout function. Temperature setting must be > or = 4.09 AND < or = 4.11.
4.11	Com- pr_4_Low_Temp	81 80	207 0	255 -31	Counts Y:DegF	Low ambient lockout for compressor 4. A value of 255 (-31F) will disable low ambient lockout function. Temperature setting must be $>$ or = 4.10.
4.12	Compr_Min_ Off_Delay	30 60	150 300	255 510	Counts A:Sec.	Compressor minimum off delay. Used on 1 PH units.
4.13	Compr_Min_ Run_Time	30 60	120 240	255 510	Counts A:Sec.	Compressor minimum run time. Used on 3 PH units.
4.14	Max_HP_ Occurrences	1	3	8	Counts	Maximum High Pressure occurrences that are stored before control locks off compressor stage and energizes the service output. If max value is set, lockout and service output features are disabled.
4.15	Max_LP_ Occurrences	1	3	8	Counts	Maximum Low Pressure occurrences that are stored before control locks off compressor stage and energizes the service relay. If max value is set, lockout and service output features are disabled.
4.16	Cond_Fan_ Delay	0 0	1 2	120 240	Counts A:Sec.	Condenser fan delay. Used only on 6 fan units.
4.17	Stg_2_Latch	0	0	1	Option	Stage 2 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled
4.18	Stg_3_Latch	0	0	1	Option	Stage 3 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled
4.19	Stg_4_Latch	0	0	1	Option	Stage 4 latch option. Used in zone sensor applications. 0: Latch Disabled 1: Latch Enabled
4.20	Stg_2_StgUp_ Timer	0 0	57 912	225 3600	Counts F:Sec	Stage 2 stage up timer. The maximum time that cooling stage 1 runs before calling cooling stage 2. Used in zone sensor applications. Disabled if set to 0.
4.21	Stg_3_StgUp_ Timer	0 0	57 912	225 3600	Counts F:Sec	Stage 3 stage up timer. The maximum time that cooling stage 2 runs before calling cooling stage 3. Used in zone sensor applications. Disabled if set to 0.

Con	Control Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
4.22	Stg_4_StgUp_ Timer	0 0	57 912	225 3600	Counts F:Sec	Stage 4 stage up timer. The maximum time that cooling stage 3 runs before calling cooling stage 4. Used in zone sensor applications. Disabled if set to 0.
4.23	StgDn_Timer	0 0	57 912	225 3600	Counts F:Sec	Time delay before a lower stage turns off following a higher stage termination. Used in zone sensor applications.

Cont	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 4	Coolir	ng Paran	neters (continued)
4.24	Reheat_ Control	0	0	7	Option	 Reheat Control Mode 0- No reheat. 1- Supermarket reheat using De-Humidistat (Tstat mode only) 2- Supermarket reheat using RH sensor. 3- Humiditrol reheat. Conditions: Blower must be energized, Must be occupied, At least one previous cooling demand. 4- RH measurement / display. No Supermarket or Humiditrol reheat. 5- Humiditrol reheat. Conditions: At least one previous cooling demand. 6- Humiditrol reheat. Conditions: Blower must be energized, Must be occupied. 7- Humiditrol reheat. Conditions: None
4.25	Reheat_SP	0 0	60 60	100 100	Counts P:%RH	Percent relative humidity where supermarket or Humiditrol reheat demand is energized. Used of Reheat option 2,3,5,6,or 7. Reheat is de-energized at set point – dead-band (ECTO 4.26). If value = 100, Humiditrol reheat is controlled by the digital input A55_P299-8 Digital Input 4 only. Energized input signal calls for reheat demand. L Connection Network RH set point will override this set point. (Such as from NCP).
4.26	Reheat_ RH_DB	1 1	3 3	10 10	Counts P:%RH	Reheat RH dead-band. Used of Reheat option 2,3,5,6,or 7. Reheat is on when RH>=ECTO 4.25 and off when RH< ECTO 4.25 – ECTO 4.26.
4.27	FC_LAL_SP	81 80	120 55	136 45	Counts Y:DegF	Free-cooling Low Ambient Lockout Set point. When outdoor air is suitable for free cooling and an economizer is present, the compressor will not run when ambient is below this value. A value of 207 (0 degF) disables this feature. A value of 81 (80 degF) locks out compressor operation whenever OAS, regardless of OAT.
			Block	5 Mis	cellaneo	ous Parameters
5.01	SMK_Alarm	0	0	7	Option	 Smoke alarm control options. 0- Unit off. 1- Blower on, exhaust fan off, OD air damper open (positive pressure) 2- Blower on, exhaust fan on, OD air damper closed (negative pressure). On VAV units, exhaust fan will run at speed set in ECTO 8.19 with blower). 3- Blower on, exhaust fan on, OD air damper open (purge). On VAV units, exhaust fan on, OD air damper open (purge). On VAV units, exhaust fan on, OD air damper closed (negative pressure). On VAV units, exhaust fan will run at speed set in ECTO 8.19. 4- Blower off, exhaust fan on, OD air damper closed (negative pressure). On VAV units, exhaust fan will run at speed set in ECTO 8.19. 5- Blower on, exhaust fan on, OD air damper closed (negative pressure). On VAV units, exhaust fan will run to maintain pressure set point set in ECTO 8.19 with blower). 6- Blower on, exhaust fan on, OD air damper open (purge). On VAV units, exhaust fan will run to maintain pressure set point set in ECTO 8.19. 7- Blower off, exhaust fan on, OD air damper closed (negative pressure). On VAV units, exhaust fan will run to maintain pressure in ECTO 8.19. 7- Blower off, exhaust fan on, OD air damper closed (negative pressure). On VAV units, exhaust fan will run to maintain pressure in ECTO 8.19.
5.02	Error_Timed_ Off_Delay	8 64	38 304	225 1800	Counts C:Sec.	Off time delay if a "no-run" error occurs. Off delay for error codes 5, 10, 11, 20, 21, 44, 45, 83, 86, 87 and 114.
5.03	Display_Temp	0	0	1	Option	Degrees Celsius option for A55 Display 0: Displays degrees Fahrenheit 1: Displays degrees Celsius

Cont	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 5 Mis	cellan	eous Pa	rameters (continued)
5.04	CL_Staging	0	2	4	Option	 Cooling staging options: No cooling operation Basic Tstat operation. Two cooling stages. Units with Economizers Y1=Free Cooling, Y2=adds all mechanical stages. Basic Tstat operation. Two cooling stages. Units with Economizers Y1=Free Cooling, Y2= adds first stage of mechanical. Basic Tstat operation. Three cooling stages. Y1 only = first stage, Y2 only = second stage, Y1+Y2 = third stage. Units with Economizers Y2 only adds first stage of mechanical, Y1+Y2 adds first and second stage of mechanical. Discharge air control. Up to four stages.
5.05	RAT_LT	0	0	1	Option	Enables return air temperature limit option. Return air limits may be used for limiting zone temperatures. Continu- ous fan operation recommended.
5.06	RAT_HT_LT	95 100	117 85	154 60	Counts X:DegF	Return air limit for heating. If the return air heating limit is exceeded, the heating demands are interrupted. 5.05 MUST BE SET TO 1 TO ENABLE
5.07	RAT_CL_LT	124 80	146 65	154 60	Counts X:DegF	Return air limit for cooling. If the return air cooling limit is exceeded, the cooling demands are interrupted. 5.05 MUST BE SET TO 1 TO ENABLE
5.08	A42_Input_ Occurrences	1	3	15	Counts	A42 input occurrences before service relay is energized. (A55_P299_6)
5.09	HT_Staging	0	2	2	Option	 Heating staging options: 0- No heating operation. 1- Discharge air control with up to 4 stages. 2- Thermostat operation.
5.10	LP_Strike_3_ Run_Time_1	0 0	45 360	255 2040	Counts C:Sec.	Ignore LP trip when compressor run time less than this. LONG/HOT condition.
5.11	LP_Strike_3_ Run_Time_2	0 0	90 720	255 2040	Counts C: Sec.	Ignore LP trip when compressor run time less than this. LONG/COLD condition.
5.12	LP_Strike_3_ Run_Time_3	0 0	15 120	255 2040	Counts C:Sec.	Ignore LP trip when compressor run time less than this. SHORT/HOT condition.
5.13	LP_Strike_3_ Run_Time_4	0 0	38 304	255 2040	Counts C:Sec.	Ignore LP trip when compressor run time less than this. SHORT/ COLD condition.
5.14	LP_Strike_3_ Off_Time	28 3584	113 14464	169 21632	Counts E:Sec	Low Pressure Switch Strike Three compressor off time break point for LONG/SHORT evaluation.
5.15	LP_Strike_3_ Temp_SP	50 100	97 70	191 10	Counts Y:Deg.	Low Pressure Switch Strike Three outdoor air temperature break point for HOT/COLD evaluation.
5.16	DCV_Max_ Damper Open	0 0	100 100	100 100	Counts P:%	Maximum allowed Demand Control Ventilation damper open position. (Set to 0 to disable IAQ). Also used for OAC.
5.17	DCV_Damper _Start_Open_ SP	0 0	64 502	255 2000	Count I:PPM	Damper "start open" CO_2 set point for Demand Control Ventilation. Level where fresh air damper begins to open.
	OAC_Dampr_St art_Open_SP	0	2.51	10	R: Volt	Damper "start open" set point for Outdoor Air Control. Level where fresh air damper begins to open.
5.18	DCV_Dampr_ Full_Open_SP	0 0	128 1004	255 2000	Count I:PPM	Damper "full open" CO ₂ set point for Demand Control Ventilation. Level where fresh air damper is opened to maximum.
	OAC_Dampr_F ull Open SP	0	5.02	10	R: Volt	Damper "full open" set point for Outdoor Air Control. Level where fresh air damper is opened to maximum.
5.19	DCV_Low_Tem p_Override_ Full_Closed	0 132	191 10	255 -31	Counts Y:Deg.F	Low outdoor air temp. where fresh air damper is closed to minimum position for Demand Control Ventilation and Outdoor Air Control (OAC).
5.20	DCV_Low_Tem p_Override_ Start_Closing	0 132	144 40	255 -31	Counts Y:Deg.F	Low outdoor air temp. where fresh air damper begins to close. Set ECTO 5.20 = 255 to disable the outdoor Low Temp. override of DCV operation. Also used for OAC.
5.21	DCV - HighTemp. Override Start Closing	0 132	89 75	255 -31	Counts Y:Deg.F	High outdoor air temp. where fresh air damper begins to close. Set 5.21 =0 to disable the outdoor High Temp override of DCV operation. Also used for OAC.
5.22	DCV_High_Tem p_ Override_ Full_Close	0 132	42 105	255 -31	Counts Y:Deg.F	High outdoor air temp. where fresh air damper is closed to minimum position. Also used for OAC.
5.23	Free_CL_ Max_Damper	0 0	100 100	100 100	Counts P:%	The maximum allowed fresh air damper opening for FREE COOL- ING.

Cont	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 5 Mis	cellan	eous Pa	rameters (continued)
5.24	Min_Damper_ Position	0 0	101 101	100 100	Counts P: %	Minimum fresh air damper position during occupied operation. Value of 101 allows adjustment by potentiometer on economizer board A55 only. When in global mode with A55 EM1 versions 2.01 and earlier, only 101 should be used.
5.25	Zone_Sensor_ StartUp_ Delay	15 2	15 2	225 30	Counts C:Min.	Start-up demand delay. Holds off all unit operation zone sensor and CAVB applications. Hold off FAH-Reheat, FAC, FAH options and all GP outputs. May be used to stagger unit start-ups. Does NOT delay demands in thermostat mode.
5.26	IAQ_Input_ Source/Mode	0	0	5	Option	 IAQ input source and mode (0-3 operate only when blower is on). DCV System IAQ. Either P298-3 or network IAQ. DCV System IAQ. Either P298-3 or network IAQ with no OAT limits. Outdoor Air Control Sensor A24 (A133_P194-6) (TB22-6). Outdoor Air Control Sensor A24 (A133_P194-6) (TB22-6) with no OAT limits. DCV System IAQ. Either P298-3 or network IAQ with blower on/auto operation. DCV System IAQ. Either P298-3 or network IAQ with blower on/auto operation.
5.27	Net_Sig_ Sources	0	0	15	Option	Network Signal Sources Weight Description 1- IAQ (A63) 2- Zone Temp. (A2) 4- Outdoor Enthalpy (A7) 8- Indoor RH (A91) Option is sum of the weights for all input signals that are provided remotely over the network. Note: When network sensor is used the physical analog input is ignored. Loss of sensor alarms will not occur unless network communication is lost for 5 minutes, or has not been established within 5 minutes after reset.
			Blo	ck 6 S	System 1	Parameters
6.01	System_Mode	0	0	12	Option	System mode of operation. Control System Backup Value Mode Mode 0- Local Thermostat None 1- Zone Sensor None 2- Zone Sensor Local Thermostat 3- Zone Sensor Return Air Sensor 4- Remote Demand None 5- Remote Demand Local Thermostat 6- Remote Demand Return Air Sensor 7- Remote Demand Zone Sensor
6.02	OCP_HT_ BkUp_SP	20 95	120 70	240 40	Counts Z:DegF	Backup occupied heating set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only with zone sensor applications. Set point temperature must be < or = (6.04 - 6.15).
6.03	UnOcp_HT_ BkUp_SP	20 95	160 60	240 40	Counts Z:DegF	Backup unoccupied heating set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only in zone sensor applications. Set point temperature must be $< $ or $= (6.05 - 6.15)$.
6.04	Ocp_CL_ BkUp_SP	20 95	100 75	240 40	Counts Z:DegF	Backup occupied cooling set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only in zone sensor applications. Set point temperature must be > or = $(6.02 + 6.15)$.
6.05	UnOcp_CL_ BkUp_SP	20 95	60 85	240 40	Counts Z:DegF	Backup unoccupied cooling set point. Used if the communications link is lost for 5 minutes between the M2 and NCP. Used only in zone sensor applications. Set point temperature must be > or = $(6.03 + 6.15)$.
6.06	Override_ Timer	0 0	28 3584	225 28800	Counts E: Sec	After hours override timer. Only used on zone sensor applications without a Network Control Panel (NCP).
6.07	HT_Stg_DB	4 1	4 1	15 3.75	Counts W:DegF	Heating dead-band. Used only with M2 zone sensor applications. Dead band must be $<$ or = 6.15 - 6.08.

Con	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 6 S	ysten	n 1 Parai	neters (continued)
6.08	CL_Stg_DB	4 1	4 1	15 3.75	Counts W:DegF	Cooling dead-band. Used only with zone sensor applications. Dead band must be $<$ or = 6.15 - 6.07.
6.09	Stg_1_HT_Diff	0 0	2 0.5	12 3	Counts W:DegF	Heating stage 1 differential. Used only with zone sensor applications. Differential temperature must be < or = 6.11.
6.10	Stg_1_CL_Diff	0 0	2 0.5	12 3	Counts W:DegF	Cooling stage 1 differential. Used only with zone sensor applications. Differential temperature must be < or = 6.12.
6.11	Stg_2_HT_Diff	0 0	4 1	12 3	Counts W:DegF	Heating stage 2 differential. Used only with zone sensor applications. Differential temperature must be > or = 6.09.
6.12	Stg_2_CL_Diff	0 0	4 1	12 3	Counts W:DegF	Cooling stage 2 differential. Used only with zone sensor applications. Differential temperature must be > or = 6.10 AND < or = 6.13.
6.13	Stg_3_CL_Diff	0 0	6 1.5	12 3	Counts W:DegF	Cooling stage 3 differential. Used only with zone sensor applications. Differential temperature must be > or = 6.12 AND < or = 6.14.
6.14	Stg_4_CL_Diff	0 0	8 2	12 3	Counts W:DegF	Cooling stage 4 differential. Used only with zone sensor applications. Differential temperature must be $>$ or = 6.13.
6.15	Zone_Sensor Autochangeover DB_Min	8 2	12 3	40 10	Counts W:DegF	Minimum autochangeover dead-band temperature. Dead band must be > or = (6.07 + 6.08). Used in zone sensor applications.
6.16	Autochangeover _Delay	15 60	75 300	225 900	Counts B: Sec	Autochangeover time delay. Delay between heating and cooling modes.
6.17	BL_Con- trolZone_Senso r	0	0	1	Option	Blower control option for zone sensor applications during occupied periods. 0 = Blower cycles with demands 1 = Continuous blower
6.18	Zone_Sensor_ Calibration	-20 -5	0 0	20 5	Counts W:DegF	Zone sensor calibration offset. Counts: $-20 - 16 - 12 - 8 - 4 0 4 8 12 16 20$ Offset(°F)-5 -4 -3 -2 -1 0 1 2 3 4 5 °F is an offset added to the zone sensor reading. Example: If the zone sensor is reading 2°F high, it can be corrected by setting the count value to -8 (-2°F offset).
6.19	Free_CL_ Lock- out_SP	112 60	161 Disabled	160 30	Counts Y:DegF	Free cooling lockout SP. Locks out free cooling when outdoor temper- ature is below this value. Default value 161 disables free cooling lock- out.
6.20	FAH_SP	139 70	138 Disabled	183 40	Counts X:DegF	Fresh Air Heating set point. To enable FAH, set this to a value between 40F (183) and 70F(139). Minimum value (138) disables Fresh Air Heating.
6.21	FAH_Stg_DB	5 3	15 10	22 15	Counts V:DegF	Fresh Air Heating stage dead-band.
6.22	FAH_Min_ Cycle_ Time	15 120	60 480	225 1800	Counts C:Sec	Fresh Air heating minimum cycle time.
6.23	Free_Cooling_ Supply_SP	146 65	161 55	176 45	Counts X:Deg.F	Economizer modulates dampers to maintain supply air temperature (RT6) at this set point during free cooling. DACC reset applies. See ECTO 8.01-8.07.
6.24	Stg_3_HT_Diff	0 0	6 1.5	12 3	Counts W:DegF	Heating stage 3 differential temperature. Used only with zone sensor applications. Differential temperature must >= ECTO 6.11.
6.25	Stg_4_HT_Diff	0 0	8 2	12 3	Counts W:DegF	Heating stage 4 differential temperature. Used only with zone sensor applications. Differential temperature must >= ECTO 6.24.
6.26	Economizer_ Free_CL_SP	97 70	191 10	2507 0	Counts Y:DegF	A55 DIP switch selects temperature (TMP) or enthalpy (ODE) mode. When in TMP mode, outdoor air is suitable for free-cooling when OAT < ECTO for ECTO 41-70 degF, or when OAT < RAT - ECTO for ECTO 0-40 degF. This ECTO is not used in ODE mode. OAT = OUTDOOR TEMPERATURE RAT=RETURN TEMPERATURE
6.27	Economizer_ Profile	0	2	2	Option	 Economizer operating profile during free cooling when compressor cooling is on. 0 - Damper continues to modulate. 1 - Damper opens to ECTO 5.23. 2 - Same as 1, but additionally holds off compressor cooling until the damper has modulated to ECTO 5.23 value for 3 minutes.

Con	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Blo	ck 7 S	System 2	Parameters
7.01	FAH_Stg_Diff	0 0	3 2	30 20	Counts V:DegF	Fresh Air Heating stage differential. 0 value for first stage heating only for Fresh Air Heating.
7.02	Reheat_FAH_ OAT_SP	113 60	136 45	175 20	Counts Y:DegF	Outdoor air temperature set point that enables fresh air heating for reheat demand and opens damper to ECTO 7.03 when outdoor air is less than set point.
7.03	Reheat_FAH _%_ Damper	5 5	40 40	100 100	Counts P:%	Fresh air damper position during Fresh Air Heating reheat operation.
7.04	Reheat_FAH _SP	139 70	138 Disabled	183 40	Counts X:DegF	Fresh Air Heating Reheat set point. Minimum value of 138 disables FAH-Reheat.
7.05	FAT_Autochang e _Delay	28 896	56 1792	225 7200	Counts D: Sec.	Fresh air Tempering (FAH or FAC) auto-changeover delay.
7.06	FAC_SP	109 90	108 Disabled	154 60	Counts X:DegF	Fresh Air Cooling set point. To enable FAC, set this to a value between 60°F (154) and 90°F(109). Minimum value of 91°F (108) disables FAC.
7.07	FAC_Stg_DB	5 3	15 10	22 15	Counts V:DegF	Fresh Air Cooling stage dead-band.
7.08	FAC_Min_ Cycle	15 120	60 480	225 1800	Counts C: Sec.	Fresh Air Cooling minimum cycle time.
7.09	FAC_Stg_Diff	0 0	3 2	30 20	Counts V:DegF	Fresh Air Cooling stage differential between stages. Set to 0 for first stage cooling only for Fresh Air Cooling.
7.10	DACH_OCP _SP	36 140	80 110	154 60	Counts X:DegF	Discharge Air Control Heating set point during occupied period.
7.11	DACH_Un- OCP_SP	36 140	95 100	154 60	Counts X:DegF	Discharge Air Control Heating set point during unoccupied period.
7.12	DACH_Stg_ DB	7 5	7 5	30 20	Counts V:DegF	Discharge Air Control Heating dead-band.
7.13	DACH_&_FAH_ StgUp_Delay	0 0	45 180	225 900	Counts B: Sec.	Discharge Air Control Heating and Fresh Air Heating stage-up time delay.
7.14	DACH_&_FAH_ StgDn_Delay	0 0	30 120	150 600	Counts B: Sec.	Discharge Air Control Heating and Fresh Air Heating stage-down time delay.
7.15	DACH_Stg_ Diff	3 2	3 2	30 20	Counts V:DegF	Discharge Air Control Heating stage differential
7.16	DACC_OCP _SP	95 100	161 55	183 40	Counts X:DegF	Discharge Air Control Cooling set point during occupied period.
7.17	DACC_ UnOCP_SP	95 100	146 65	183 40	Counts X:DegF	Discharge Air Control Cooling set point during unoccupied period.
7.18	DACC_ Stg_DB	7 5	7 5	30 20	Counts V:DegF	Discharge Air Control Cooling stage dead-band.
7.19	DACC_&_FAC_ StgUp_Delay	0 0	45 180	225 900	Counts B: Sec.	Discharge Air Control Cooling and Fresh Air Cooling stage-up delay.
7.20	DACC_&_FAC_ StgDn_Delay	0 0	30 120	150 600	Counts B: Sec.	Discharge Air Control Cooling and Fresh Air Cooling stage-down time delay.
7.21	DACC_Stg_ Diff	3 2	3 2	30 20	Counts V:DegF	Discharge Air Cooling stage differential.

Con	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 7 S	System	n 2 Para	meters (continued)
7.22	Service_ Output_ Control_Mode	0	0	127	Option	A55 Service Output Control Mode = X + $32*Y + 16*Z$ Input source = X: 0- None. Standard Service Output based on alarms. 1- Compressor 1 duty cycle. (Compressor crankcase heater function.) On when OAT < = ECTO 7.23 and >= ECTO 7.24 seconds have passed with compressor 1 off. Off when OAT > ECTO 7.23 + 3 deg F (fixed dead-band) or < ECTO 7.24 seconds have passed with compressor 1 off 2- On when occupied. 3- On when blower on, 4- On when heating demand. 5- On when cooling demand. 5- On when cooling demand. 6- On when heating or cooling demand. 7- System RI (A55_P298_5 RH) 8- System IAQ. (A55_P298_3 IAQ) 9- System OAT (A55_P267_1/2 OAT) 10- Energy Recovery System (ERS) option. 11- SCR option for electric heat. DO-1 on with blower but off with cooling. Algorithm Y for input sources 7-9: 0- Hysteresis loop On when input >= ECTO 7.23 Off when input >= ECTO 7.24 (Fixed 3-count hysteresis loop on rising and falling edges of window.) 2- Delayed-on On when input is <= ECTO 7.23. Off when input is <= ECTO 7.23. Off when input is <= ECTO 7.23. (Fixed 3-count hysteresis loop on edge.) 3- Delayed-off On when input is <= ECTO 7.23 - 3 for >= ECTO 7.24 seconds. (Fixed 3-count hysteresis loop on edge.) 1-version Z: 0 - Output not inverted. 6- Coutput not inverted. 0 - Output not inv
7.23	Service_ Output_SP	0 0 132	127 996 100 51	255 2000 100 -31	Counts I:ppm P: % Y:DegF	A55 service relay output set point.
7.24	Service_ Output_DB	2 16 2 1 64	13 102 13 8 416	255 2000 100 162 8160	Counts I:ppm P: % O:DegF D:Sec.	A55 service relay output dead-band or delay.

Cont	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 7 S	Systen	n 2 Parai	meters (continued)
7.25	Load_Shed_ Option	0	0	15	Option	 Load shedding option used to disable half of available mechanical cooling. Select the load shedding input signal source: 0- No load shedding. 1- Special case. Shed all compressors when DI-3 opens. M2 v7.07 and later. 2- EM1 GLO (A55_P265-3) (economizer DIP NOT set to global mode). 4- DI1 (A133_P194-1, DIP set to GP) 6- DI2 (A133_P194-2, DIP set to GP) 8- DI1 (A133_P194-1, DIP set to MGV). 10- DI2 (A133_P194-2, DIP set to MGV) 11- A133_P194-1, DIP set to VAV) 14- DI2 (A133_P194-2, DIP set to VAV)
						 These options select load shedding that will round up (fractional compressors on). 1 compressor unit – compressor is not disabled. 3 compressor unit – only compressor 3 is disabled. Add one to any option to select load shedding that will round down (fractional compressors off). 1 compressor unit – compressor is disabled. 3 compressor unit – compressors 2 and 3 are disabled.
7.26	BACnet_MAC	0	128	128	Address / Option	BACnet MAC Address. A value of 0-127 sets the BACnet MAC ad- dress to that value; 128 sets the MAC address to the unit address set on the ADDRESS DIP switch.
	I		Blo	ock 8 S	System 3	Parameters
8.01	DACC_RS_ Total_LT	7 5	15 10	29 20	Counts V:DegF	Discharge Air Control Cooling total reset limit. This limits the total DACC reset allowed. Also used to reset free cooling set point (6.23).
8.02	DACC_RAT_RS _SP	124 80	139 70	169 50	Counts X:DegF	Discharge Air Control Cooling return air reset set point. Also used to reset free cooling set point (6.23).
8.03	DACC_RAT_ RS_Proportion- al_Band.	1 1	15 10	44 30	Counts V:DegF	Discharge Air Control Cooling return air reset proportional band. Also used to reset free cooling set point (6.23).
8.04	DACC_RAT_ RS_Adjust_ Band	0 0	0 0	44 30	Counts V:DegF	Discharge Air Control Cooling return air reset adjustment band. 0 disables return air cooling reset. Also used to reset free cooling set point (6.23).
8.05	DACC_OAT_ RS_SP	50 100	81 80	144 40	Counts Y:DegF	Discharge Air Control Cooling outdoor air temperature cooling reset set point. Also used to reset free cooling set point (6.23).
8.06	DACC_OAT_ RS_ Proportion- al_ Band.	1 1	31 20	94 60	Counts O:DegF	Discharge Air Control Cooling outdoor ambient temperature cooling proportional band. Also used to reset free cooling set point (6.23).
8.07	DACC_OAT_ RS_Adjust_ Band	0 0	0 0	47 30	Counts O:DegF	Discharge Air Control Cooling outdoor temperature ambient cooling adjustment reset band. 0 disables outdoor air cooling reset. Also used to reset free cooling set point (6.23).
8.08	DACH_RS_ Limit	7 5	15 10	29 20	Counts V:DegF	Discharge Air Control Heating reset limit. This limits the total DACH reset allowed.
8.09	DACH_RAT_ RS_SP.	124 80	139 70	169 50	Counts X:DegF	Discharge Air Control Heating return air heating reset set point.
8.10	DACH_RAT_ RS_Proportion- al_Band	1 1	15 10	44 30	Counts V:DegF	Discharge Air Control Heating return air heating reset proportional band.
8.11	DACH_RAT_ RS_Adjust_ Band	0 0	0 0	44 30	Counts V:DegF	Discharge Air Control Heating return reset adjustment band. 0 value disables return air heating reset.
8.12	DACH_OAT_ RS_SP	113 60	144 40	255 -31	Counts Y:DegF	Discharge Air Control Heating outdoor temperature reset set point.
8.13	DACH_OAT_R S_Proportional_ Band.	1	31 20	94 60	Counts O:DegF	Discharge Air Control Heating temperature reset proportional band.
8.14	DACH_OAT_R S_Adjust_ Band	0 0	0 0	47 30	Counts O:DegF	Discharge Air Control Heating outdoor temperature reset adjust- ment band. 0 disables outdoor temperature heating reset

Cont	rol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
			Block 8 S	System	n 3 Para	meters (continued)
8.15		0	0	255	Counts	Reserved.
8.16	Exh_Fan_ Control	0	0	23	Option	Single stage (controlled by A55_P265-2 output)Mode EnableInput 10-BlowerD_POS1-AlwaysA133_P194-12-OCPA133_P194-13-BlowerA133_P194-74-AlwaysA133_P194-75-OccupiedA133_P194-76-BlowerA133_P194-77-A133_P194-1A133_P194-77-A133_P194-1A133_P194-77-Ati33_P194-1A133_P194-77-Ati33_P194-1A133_P194-77-AlwaysA133_P194-77-AlwaysA133_P194-18-BlowerD_POS9-AlwaysA133_P194-110-OccupiedA133_P194-111-BlowerA133_P194-712-AlwaysA133_P194-713-OccupiedA133_P194-714-BlowerA133_P194-715-A133_P194-714-BlowerA133_P194-715-A133_P194-714-BlowerA133_P194-715-A133_P194-716-AlwaysA133_P194-7A133_P194-717-Occupied17-Occupied18-Blower19-A133_P194-719-A133_P194-719-A133_P194-719-A133_P194-719-A133_P194-719-A133_P194-719-A133_P194-719-A133_P194-719-A133_P194-7
8.17	Exh_Fan_ Stg_1_SP	0 0	50 50	100 100	Counts P:%	Speed set point for stage 1 exhaust fan when using a VFD for con- trolling exhaust fan in staged mode.
8.18	Exh_Fan_ Stg_2_SP	0	100 100	100 100	Counts P:%	Speed set point for stage 2 exhaust fan when using a VFD for con- trolling exhaust fan in staged mode.
8.19	Exh_Fan_ SP_for _SMK	0 0.5	50 -0.3	255 0.5	Counts M:"w.c.	Exhaust fan smoke mode set point for PID option control
	Staged_SMK	0	50	100	P:%	Staged set point for during smoke alarm. Value used depends on smoke mode (ECTO 5.01)
8.20	Exh_Fan_SP	0 -0.5	50 -0.3	255 0.5	Counts M:"w.c.	Exhaust fan set point for PID option control
	Stage_1_SP	0 -0.5	50 -0.3	100 0.5	P:% M:"w.c.	Stage 1 set point.
8.21	Exh_Fan_Min	0 0	10 10	255 100	Counts P:%	Exhaust fan minimum speed.
	Staged_1_DB	0	10 0.04	100 1.0	P:% L:"w.c.	Staged 1 dead-band.
8.22	Exh_Fan_ ManRS	0	50 50	1.0 100 100	Counts P: %	Exhaust fan PID loop manual reset value.
	Stg_1_Off_ Delay	0	100	200	A:Sec.	Stage 1 off-delay. (Only used for 2 stage operation)
8.23	Exh_Fan_PID_ P Constant	0	20	255	Counts	Exhaust fan PID loop proportional constant. The P constant must be limited to 127. Recommended setting = 17.

501	trol Parameter		Control Value				
No.	Name	Min.	Default	Max.	Units	Description	
			Block 8 S	Systen	n 3 Para	meters (continued)	
		0	.78	10.0	R:Volts		
	Stg_2_SP	0 -0.5	20 42	100 0.5	P:% M:"w.c.	Staged 2 set point.	
		-0.5	42	0.5	IVI. W.C.	Exhaust fan PID loop integral constant. T	ha Laanstant must ha limitad
8.24	Exh_Fan_PID_I	0	64	255	Counts	to 127.	
	_Constant					Recommended setting = 12.	
	Stg_2_DB	0 0	64 0.25	100 1.0	P:% L:"w.c.	Staged 2 dead-band.	
	Exh_Fan_PID_	-					
8.25	D_Constant	0	0	127	Counts	Exhaust fan PID loop derivative constant.	
8.26	Unit_Run_Op- tions	0	1	1	Option	Add the weights for each control descripti 1 - Occupied following reset until network received.	
	Stg_2_On_ Delay	0	0	254	A: Sec.	Staged 2 on-delay.	
		k 9 On	tional A133 Bo	ard in	GP Mod	e (DIP switch set to GP) Para	ameters
	Bioo					Analog output channel 1 control mode.	
						0 - No operation. Analog Output 1 off.	
						Enabled When	Control
						1- Occupied	PID set point A
						Unoccupied	PID set point B
						2- Occupied	PID set point A
						Unoccupied	Staged output B
						3- Occupied	Staged output A
						Unoccupied	PID set point B
						4- Occupied	Staged output A
						Unoccupied 5- Blower On	Staged output B PID set point A
						Blower Off	PID set point B
						6- Blower On	PID set point A
9.01	A01_control_	0	0	11	Option	Blower Off	Staged output B
	mode				•	7- Blower On	Staged output A
						Blower Off	PID set point B
						8- Blower On	Staged output A
						Blower Off	Staged output B
						9 -DI2 (A133_P194-2) on DI1 (A133_P194-1) on	PID set point B (1) PID set point A (2)
						Otherwise off	· · · · · · · · · · · · · · · · · · ·
						10-DI2 (A133_P194-2) on	PID set point B (1)
						DI1 (A133_P194-1) on	Staged output A (2)
						Otherwise off	
						11-DI2 (A133_P194-2) on DI1 (A133_P194-1) on	Staged output B (1) Staged output A (2)
						Otherwise off	Staged Output A (2)
						(1) -DI1 (A133 P194-2) doesn't matte	r
						(2) -DI2 (A133_P194-1) is off	
		0	127	255	Counts		
9.02	AO1_SP_A	0 -0.5	5.00 0	10.0 0.5	R:Volts M:"w.c.	Analog output channel 1 set point A	
		-0.5	2.5	5.0	N:"w.c.		
	Stg_Output_A	0	100	100	P:%	Staged output A	
		0	127	255	Counts		
		0 -0.5	5.00	10.0	R:Volts	Analog output channel 1 set point B	
9.03	AUT SP B		0	0.5	M:"w.c. N:"w.c.		
9.03	AO1_SP_B	-0.5	2.5	5.0	14. 44.0.		
9.03	Stg_Output_B		2.5	5.0 100	P:%	Staged output B.	
	Stg_Output_B AO1_Startup_	0	100 50	100 100	P:% Counts	Analog output channel 1 startup value. Va	
	Stg_Output_B AO1_Startup_ Value	0 0 0 0	100 50 50	100 100 100	P:% Counts P:%	Analog output channel 1 startup value. Va during the optional startup time delay set	by ECTO 9.05.
9.04	Stg_Output_B AO1_Startup_ Value AO1_Startup_	0 0 0 0 0	100 50 50 0	100 100 100 250	P:% Counts P:% Counts	Analog output channel 1 startup value. Va during the optional startup time delay set Analog output channel 1 startup delay. Op	by ECTO 9.05.
9.03 9.04 9.05	Stg_Output_B AO1_Startup_ Value AO1_Startup_ Delay	0 0 0 0 0 0	100 50 50 0 0	100 100 100 250 500	P:% Counts P:% Counts A:Sec.	Analog output channel 1 startup value. Va during the optional startup time delay set Analog output channel 1 startup delay. Op loop starts.	by ECTO 9.05. otional time delay before PID
9.04	Stg_Output_B AO1_Startup_ Value AO1_Startup_	0 0 0 0 0	100 50 50 0	100 100 100 250	P:% Counts P:% Counts	Analog output channel 1 startup value. Va during the optional startup time delay set Analog output channel 1 startup delay. Op	by ECTO 9.05. otional time delay before PID

Cont	rol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
	-	tional	A133 Board in	GP Mo	ode (DIP	switch set to GP) Parameters (continued)
9.08	AO1_PID_ ManRS	0 0	50 50	100 100	Counts P:%	Analog output channel 1 PID loop manual reset value.
9.09	AO1_PID_P_ Constant	0	0	127	Counts	Analog output channel 1 PID loop proportional constant.
9.10	AO1_PID_I_ Constant	0	0	127	Counts	Analog output channel 1 PID loop integral constant.
9.11	AO1_PID_D_ Constant	0	0	127	Counts	Analog output channel 1 PID loop derivative constant.
9.12	AO2_Control_ Mode	0	0	11	Option	Analog output channel 2 control mode. Control 0 - No operation. Analog Output 2 off. Enabled When Control 1- Occupied PID set point A Unoccupied PID set point B 2- Occupied PID set point A Unoccupied Staged output B 3- Occupied Staged output A Unoccupied Staged output A Blower On PID set point A Blower Off PID set point A Blower Off Staged output B 7- Blower On Staged output A Blower Off Staged output A Blower Off Staged output A Blower Off Staged output B 9- DI2 (A133_P194-2) on PID set point B(1) DI1 (A133_P194-1) on Staged output A (2) Otherwise off The staged output A (2) Otherwise off The Staged output A (2)
9.13	AO2_SP_A	0 0 -0.5 0	127 5.00 0 2.5	255 10.0 0.5 5.0	Counts R:Volts M:"w.c. N:"w.c.	Analog output channel 2 set point A
	Stg_Output_A	0	100	100	P:%	Staged output A.
9.14	AO2_SP_B	0 0 -0.5 0	127 5.00 0 2.5	255 10.0 0.5 5.0	Counts R:Volts M:"w.c. N:"w.c.	Analog output channel 2 set point B.
	Stg_Output_B	0	100	100	P:%	Staged output B.
9.15	AO2_Startup_ Value	0 0	50 50	100 100	Counts P:%	Analog output channel 2 startup value. Value set to Analog Output during the optional startup time delay set by ECTO 9.16.
9.16	AO2_Startup_ Delay	0 0	0 0	250 500	Counts A:Sec.	Analog output channel 2 startup delay. Optional time delay before P loop starts.
9.17	AO2_Min_ Out- put	0 0	20 20	100 100	Counts P:%	Analog output channel 2 minimum output.
9.18	AO2_Max_Out- put	0 0	100 100	100 100	Counts P:%	Analog output channel 2 maximum output.
9.19	AO2_PID_ ManRS	0 0	50 50	100 100	Counts P:%	Analog output channel 2 PID loop manual reset value.
9.20	AO2_PID_P_ Constant	0	0	127	Counts	Analog output channel 2 PID loop proportional constant.
9.21	AO2_PID_I_ Constant	0	0	127	Counts	Analog output channel 2 PID loop integral constant.

Conf	trol Parameter		Control Value			
No.	Name	Min.	Default	Max.	Units	Description
	Block 9 Op	tional	A133 Board in (GP Mo	de (DIP	switch set to GP) Parameters (continued)
9.23	DO_Control_ Mode	0	0	127	Option	GP1 Digital Out Control Mode = X + 32*Y + 16*Z Input source = X:0-None.1-Compressor 1 duty cycle. (Compressor crankcase heater function.) On when OAT <= ECTO 9.24 and >= ECTO 9.25 seconds have passed with compressor 1 off. Off when OAT > ECTO 9.24 + 3 deg F (fixed dead-band) or < ECTO 9.25 seconds have
9.24	DO_SP	0 16 0 132 -0.5 0	127 5.0 996 100 51 0 2.5	255 10.0 2000 100 -31 0.5 5.0	Counts R:Volts I:ppm P: % Y:DegF M:"w.c. N:"w.c.	Digital output control mode set point
9.25	DO_DB	2 0 2 1 64 0.01 0	13 .50 102 13 8 416 .05 .25	255 10.0 2000 100 162 8160 1.0 5.0	Counts R:Volts I:ppm P: % O:DegF D:Sec. L:"w.c. N:"w.c.	Digital output control mode dead-band or delay.

Table 42. ECTO Parameter Code Conversion Table									
i				Codes A T			D	-i	i
Counts Sec. Min.		Sec.	B Sec. Min.		C Sec. Min.		E Hrs.	F Min.	
Counts	Sec.					-	Min.		
0	0	0	0	0	0	0	0	0	0
10	20	0.33	40	0.67	80	1.33	5.33	0.36	2.67
20	40	0.67	80	1.33	160	2.67	10.67	0.71	5.33
30	60	1.00	120	2.00	240	4.00	16.00	1.07	8.00
40	80	1.33	160	2.67	320	5.33	21.33	1.42	10.67
50	100	1.67	200	3.33	400	6.67	26.67	1.78	13.33
60	120	2.00	240	4.00	480	8.00	32.00	2.13	16.00
70	140	2.33	280	4.67	560	9.33	37.33	2.49	18.67
80	160	2.67	320	5.33	640	10.67	42.67	2.84	21.33
90	180	3.00	360	6.00	720	12.00	48.00	3.20	24.00
100	200	3.33	400	6.67	800	13.33	53.33	3.56	26.67
110	220	3.67	440	7.33	880	14.67	58.67	3.91	29.33
110	220	4.00							
			480	8.00	960	16.00	64.00	4.27	32.00
130	260	4.33	520	8.67	1040	17.33	69.33	4.62	34.67
140	280	4.67	560	9.33	1120	18.67	74.67	4.98	37.33
150	300	5.00	600	10.00	1200	20.00	80.00	5.33	40.00
				Codes I Th	-			1	
0	<u> </u>	ppm	J mA	L Pres. "w.c.		M . "w.c.	N Pres. "w.c.		O Temp. F (C)
Counts									/
0		0	0	0		0.5	0	•).00)
10 20		.43 5.86	0.78	0.04).46).42	0.20		(3.53)
30		5.29	2.35	0.08).42	0.39		(7.07)
40		3.72	3.14	0.12).34	0.59		(10.60) (14.13)
50		2.15	3.92	0.10).30	0.78		(14.13) (17.67)
60		0.58	4.71	0.20).26	1.18		(11.07) (21.20)
70		9.01	5.49	0.24).20	1.10		(21.20) (24.73)
80		7.44	6.27	0.27).19	1.57		(24.73) (28.27)
90		5.87	7.06	0.31).15	1.76		(31.80)
100		4.3	7.84	0.39).11	1.96		(35.33)
110		2.73	8.63	0.43).07	2.16		(38.87)
120		1.16	9.41	0.43).03	2.10		(42.40)
120		19.6	10.20	0.47		.01	2.55		(42.40) (45.93)
130		198	10.20	0.55		.01	2.75		(49.47)
150		76.5	11.76	0.59		.00	2.94		(53.00)
160		54.9	12.55	0.63		.00	3.14		(56.53)
170		33.3	13.33	0.67		.10	3.33		(60.07)
180		11.7	14.12	0.71		.21	3.53		(63.60)
190		90.2	14.90	0.75		.25	3.73		(67.13)
200		68.6	15.69	0.78		.28	3.92		(70.67)
210		47	16.47	0.82		.32	4.12		(74.20)
220		25.5	17.25	0.86		.36	4.31		(77.73)
230		03.9	18.04	0.90		.40	4.51		(81.27)
240		32.3	18.82	0.94		.44	4.71		(84.80)
250		60.8	19.61	0.98		.48	4.90		(88.33)
		1							

Table 42. ECTO Parameter Code Conversion Table (continued)												
	Codes P Through Z											
	Р	R	\ \	/		V)	x	١	(Ż	2
			Diff. 1	emp.	Diff.	Гетр.	Ter	np.	Temp.		Temp.	
Counts	%	VDC	F	С	F	С	F	С	F	С	F	С
0	0	0	0	0	0	0	164.45	73.58	131.56	55.31	100	37.78
10	10	0.39	6.79	3.77	2.50	1.39	157.66	69.81	125.20	51.78	97.50	36.39
20	20	0.78	13.58	7.55	5.00	2.78	150.87	66.04	118.84	48.24	95.00	35.00
30	30	1.18	20.38	11.32	7.50	4.17	144.07	62.26	112.48	44.71	92.50	33.61
40	40	1.57	27.17	15.09	10.00	5.56	137.28	58.49	106.12	41.18	90.00	32.22
50	50	1.96	33.96	18.87	12.50	6.94	130.49	54.72	99.76	37.64	87.50	30.83
60	60	2.35	40.75	22.64	15.00	8.33	123.70	50.94	93.40	34.11	85.00	29.44
70	70	2.75	47.54	26.41	17.50	9.72	116.91	47.17	87.04	30.58	82.50	28.06
80	80	3.14	54.34	30.19	20.00	11.11	110.11	43.40	80.68	27.04	80.00	26.67
90	90	3.53	61.13	33.96	22.50	12.50	103.32	39.62	74.32	23.51	77.50	25.28
100	100	3.92	67.92	37.73	25.00	13.89	96.53	35.85	67.96	19.98	75.00	23.89
110	100	4.31	74.71	41.51	27.50	15.28	89.74	32.08	61.60	16.44	72.50	22.50
120	100	4.71	81.50	45.28	30.00	16.67	82.95	28.30	55.24	12.91	70.00	21.11
130	100	5.10	88.30	49.05	32.50	18.06	76.15	24.53	48.88	9.38	67.50	19.72
140	100	5.49	95.09	52.83	35.00	19.44	69.36	20.76	42.52	5.84	65.00	18.33
150	100	5.88	101.88	56.60	37.50	20.83	62.57	16.98	36.16	2.31	62.50	16.94
160	100	6.27	108.67	60.37	40.00	22.22	55.78	13.21	29.80	-1.22	60.00	15.56
170	100	6.67	115.46	64.15	42.50	23.61	48.99	9.44	23.44	-4.76	57.50	14.17
180	100	7.06	122.26	67.92	45.00	25.00	42.19	5.66	17.08	-8.29	55.00	12.78
190	100	7.45	129.05	71.69	47.50	26.39	35.40	1.89	10.72	-11.82	52.50	11.39
200	100	7.84	135.84	75.47	50.00	27.78	28.61	-1.88	4.36	-15.36	50.00	10.00
210	100	8.24	142.63	79.24	52.50	29.17	21.82	-5.66	-2.00	-18.89	47.50	8.61
220	100	8.63	149.42	83.01	55.00	30.56	15.03	-9.43	-8.36	-22.42	45.00	7.22
230	100	9.02	156.22	86.79	57.50	31.94	8.23	-13.20	-14.72	-25.96	42.50	5.83
240	100	9.41	163.01	90.56	60.00	33.33	1.44	-16.98	-21.08	-29.49	40.00	4.44
250	100	9.80	169.80	94.33	62.50	34.72	-5.35	-20.75	-27.44	-33.02	37.50	3.06
255	100	10.00	173.20	96.22	63.75	35.42	-8.75	-22.64	-30.62	-34.79	36.25	2.36

Table 43. Code Conversion

Code	Туре	Value	Convert Counts to Value	Convert Value to Counts
А	Timer	Seconds	2 x Counts	Seconds / 2
В	Timer	Seconds	4 x Counts	Seconds / 4
С	Timer	Seconds	8 x Counts	Seconds / 8
D	Timer	Seconds	32 x Counts	Seconds / 32
Е	Timer	Seconds	128 x Counts	Seconds / 128
F	Timer	Seconds	16 x Counts	Seconds / 16
I	IAQ	ppm CO ₂	7.843 x Count	ppm / 7.843
J	0-20mA	mA	Counts / 12.75	mA x 12.75
L	"w.c. Differential For M	"W.C.	Counts / 255	"w.c. x 255
М	"w.c0.5 - +0.5	"W.C.	(Count/255) - 0.5	("w.c. + 0.5) x 255
Ν	"w.c. Differential For N	"W.C.	Count / 51	"w.c. x 51
Ν	N (0.0 - 5.0)	"W.C.	Count / 51	"w.c. x 51
0	OAT Differential	Degrees °F	0.6360 x Count	Deg F / 0.6360
Р	Percent	Percent	Counts (maximum = 100)	Percent
R	0-10V	Volt	Count / 25.5	Volt x 25.5
V	RAT, DAT Differential	Degrees °F	0.6792 x Counts	Deg F / 0.6792
W	ZAT Differential	Degrees °F	Counts / 4	Deg F x 4
Х	RAT, DAT	Degrees °F	164.45 - (.6792 x Counts)	(164.45 - Deg F) / 0.6792
Y	OAT	Degrees °F	131.56 - (.6360 x Counts)	(131.56 - Deg F) / 0.6360
Z	ZAT	Degrees °F	100 - (Counts / 4)	(100 - Deg F) x 4

18. Networking The Controllers

A network control panel (NCP) and NCP PC software can be used to schedule building operation for any M2 on the same daisy-chained I connection network.

The network thermostat controller (NTC) is an L connection direct digital controller used on units which are not equipped with an M2. The Building Controller (BC) is used to control building functions such as lights and signs. Use L connection specific network cable and daisy chain as shown in figure 35.

Up to 31 controllers can be daisy chained on a single L connection network. Any combination of M2, M1, NTC, and BC controller can be used (see figure 34).

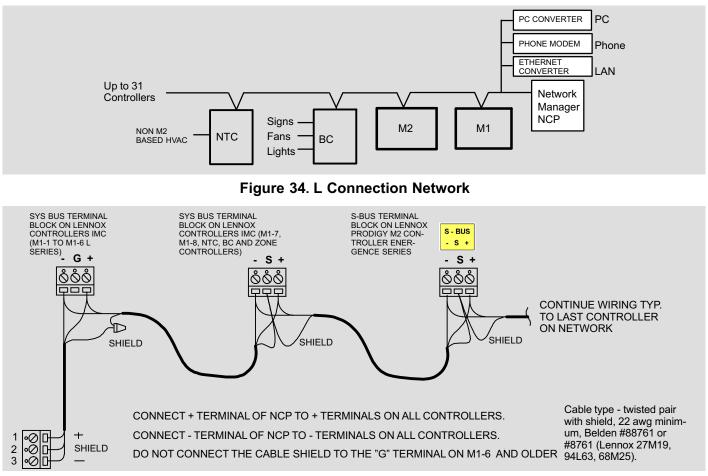


Figure 35. L Connection® Network Daisy-chain Communication Wiring

19. Sequence of Operation

19.1. Unit Controller Control Modes

Unit Controller can operate in several different control modes. The selection of these control modes will depend upon several factors:

- Unit type constant air volume (CAV) or variable air volume (VAV) with supply fan variable frequency drive.
- Zoning application (single zone, bypass zoning or zoning)
- Which device will control rooftop unit staging and unit operation (thermostat / third party unit controller or the Unit Controller)
- The desired level of unit heating and cooling staging (2 heat / 2 cool or 4 heat / 4 cool)

19.1.1. Unit Controller In Zone Sensor Mode

When in the zone sensor mode, the unit controller can provide up to four stages of mechanical heating and cooling operation. Constant volume units in single zone applications can use this control mode. The zone sensor will provide space temperature information to the unit controller. The unit controller houses all space temperature set points and controls all rooftop unit staging and general operation. The unit controller also determines unit error codes, provides diagnostic information and maintains safe operation limits. It is important to note that scheduling and/or set point control requires the use of a L Connection Network Control Panel.




Figure 36. Constant Air Volume Unit in Single Zone Application

19.1.2. Unit Controller In Thermostat Mode

When in the thermostat mode, the unit controller can provide up to two stages of mechanical heating and cooling operation. Constant volume units in either single zone or bypass zoning applications can use this control mode. To operate correctly, a Lennox or third-party thermostat or unit control must provide the following wiring connections to the unit controller:

- 1. Ventilation demand
- 2. Occupied demand
- 3. Heating demand one
- 4. Heating demand two
- 5. Cooling demand one
- 6. Cooling demand two

In this configuration, either the thermostat or unit control will control the rooftop unit staging and general operation. The unit controller functions primarily to determine unit error codes, provide diagnostic information and maintain safe operation limits.

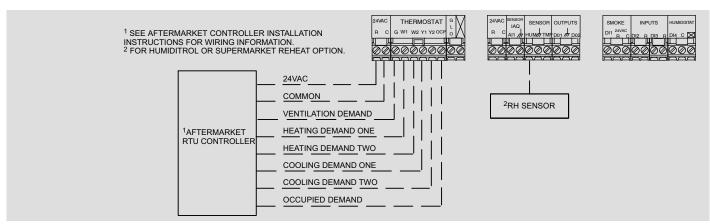


Figure 37. Constant Air Volume Unit In Single Zone Application


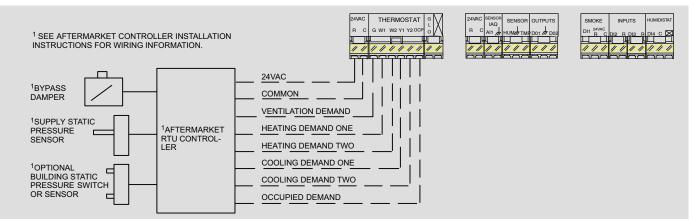


Figure 38. Constant Air Volume Unit in Bypass Zoning Application

When in thermostat mode and configured for discharge air temperature control, the unit controller can provide up to four stages of mechanical heating and cooling operation. Variable air volume units using a variable frequency drive on the supply fan and operating in a zoning application must use this control mode. Although not as common, constant volume units in either single zone or bypass zoning applications may also use this control mode. To operate correctly, a Lennox or third-party thermostat or unit control must provide the following wiring connections to the unit controller:

- 1. Ventilation demand
- 2. Occupied demand
- 3. Heating demand
- 4. Cooling demand

In this control mode the unit controller will control all cooling and heating staging to maintain the the discharge air temperature set points set in the unit controller (typically 55°F for cooling and 110°F for heating). A third-party unit control, or a thermostat can provide these inputs to the unit controller. For example, if the unit control passes along a demand for cooling then the unit controller will activate the refrigeration system and increase or decrease cooling stages to maintain the discharge supply air temperature set point. In this mode, the unit controller will also maintain the supply duct static pressure by directly controlling the supply fan variable frequency drive. Along with providing control of the rooftop unit, the unit controller will also provide error codes and diagnostic information.

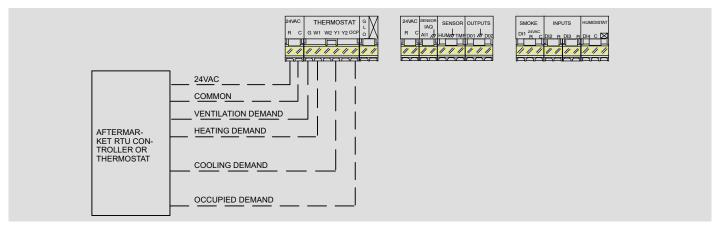



19.1.3. Operations Common to All Rooftop Units

The following sequence of operation information applies to all Energence rooftop units regardless of unit controller control mode, unit type or zoning application.

19.1.3.1. Heating Operation (Modulating Gas)

The Energence unit features two separate gas burner sections, each with a modulating gas valve and a shut-off valve. The modulating gas heat section can provide continuous operation from 25-100% of total heat capacity. Upon receiving a heating demand, the unit controller will instruct the modulating gas unit to maintain a discharge air temperature set point (default 110°F). The unit maintains this set point by feeding information from a discharge air temperature sensor located in the supply duct back to the unit controller. Based on this information, the unit controller increases or decreases gas heat output to maintain the desired heating set point. The unit controller controls modulation by adjusting either one or both of the gas burner sections. Upon receiving a heating demand, the unit controller will bring on both gas burner sections at 100%. When the discharge air temperature reaches the set point (default 110°F), the unit controller will modulate both gas burner sections by the same amount between 100% and 50% to maintain the set point. If less heat is required to maintain the set point, the unit controller will turn off the second gas burner section and modulate the first gas burner section between 100% and 50% (50% to 25% of total unit capacity).

The basic operation of modulating gas remains the same regardless of unit type or unit controller mode. Gas heat modulation requires the necessary mechanical components, a discharge air temperature sensor located in the supply duct and a single heating demand to the unit controller.

19.1.3.2. Occupied Demand

Upon receiving occupied and ventilation demands from the Lennox or third party unit controller, the unit controller adjusts the fresh air damper to either a fixed minimum position or allows it to modulate based on a CO2 sensor (demand control ventilation). The CO2 sensor can be wired directly to the unit controller, to another controller that can monitor the sensor and pass a signal to the unit controller for damper control, or to both the unit controller and another device for monitoring through the desired man-machine interface while the unit controller maintains damper control.

During morning warm-up the unit controller keeps the fresh air damper closed based on unit controller configuration settings. Set points for minimum and maximum damper position and CO2 control reside in the unit controller memory, have factory default settings, and may be adjusted at start up. The user can change these settings either locally or remotely through Lennox' L Connection Network® Unit Controller Software. The user will not have the ability to adjust the settings through third party software or control devices.

19.1.3.3. Demand Control Ventilation

Demand control ventilation is used in applications where the demand for fresh outdoor air fluctuates during the occupied time period. Using a CO2 sensor connected directly to the unit controller, the unit can intelligently increase or decrease the amount of fresh outdoor air by changing the outdoor air damper position. The unit controller has two operation modes available, set point or proportional, to control the outdoor air damper position.

19.1.3.4. Fresh Air Tempering (FAT)

In applications with large outdoor air requirements, Fresh Air Tempering is used to minimize temperature fluctuations in the conditioned space. The unit controller controls discharge air temperature by energizing heating or cooling in response to the discharge supply air duct temperature. Fresh air tempering only occurs when there is no heating or cooling demand from the occupied space. The user must configure the unit controller to turn on the fresh air tempering option.

Heating is energized when discharge air temperature falls below fresh air heating set point (60°F default) and terminates when the return air temperature is less than the set point. Cooling is energized when discharge air temperature rises above fresh air cooling set point (80°F default) and terminates when the return air temperature is greater than the set point. FAT will operate up to four stages of heating and cooling to maintain discharge air temperature. Standard heating and cooling demands will override FAT heating and cooling demands.

19.1.3.5. Hot Gas Bypass

By selecting the hot gas bypass option, the unit can operate in low airflow applications down to 12.5% of nominal capacity. As the suction line pressure decreases and the potential for coil frosting increases, the mechanical system bypasses hot refrigerant gas from the first stage compressor discharge line back to the suction line. The hot gas increases the pressure of the suction line and reduces the compressor capacity. A de-superheater valve bypasses refrigerant from the liquid line and mixes it with the hot gas before entering the suction line to maintain the set point suction gas superheat entering the compressor.

19.1.3.6. Discharge Air Cooling Reset Operation

Discharge air cooling reset operation saves energy by gradually increasing the discharge air set point as outside air temperature decreases. This operation also reduces the potential for over-cooling if the zoning system is misapplied, has an abnormal condition, or has a dominant zone. The unit controller has various advanced discharge air cooling reset options which can be selected at start up and are based on either return air temperature, outside air temperature, or both return and outdoor air temperature.

19.1.3.7. Discharge Air Heating Reset Operation

Discharge air heating reset operation saves energy by gradually decreasing the discharge air set point as outside air temperature increases. This operation reduces the potential for overheating if the zoning system is misapplied, has an abnormal condition, or has a dominant zone. The unit controller has various advanced discharge air heating reset options which can be selected at start up and are based on either return air temperature, outside air temperature or both return and outdoor air temperature.

19.1.3.8. Building Pressure Control for Standard or High Static Power Exhaust Fans

Energence units can control building static pressure with either a standard or high static power exhaust fan. Each fan type is available in either a 50% (one fan) or 100% (two fans) configuration. Standard static power exhaust fans use a propeller while high static power exhaust fans use a centrifugal blower. All units featuring power exhaust fans must also have an economizer for proper operation.

Control of the fans can occur based on damper position or building differential static pressure transducers located outside the building and in the return duct. Using the differential pressure transducer allows for more precise control of building static pressure and ultimately better performance. Control of power exhaust fans can occur through the unit controller, third party device or separate unit controller.

19.1.3.9. Damper Position Control

Power exhaust fans (standard or high static) with damper position control use damper position to determine when to activate fan operation. When the economizer damper is closed, the power exhaust fan will remain off. Once the economizer modulates open past a pre-determined position, the power exhaust fan will turn on. This allows the unit to relieve a portion of the incoming fresh outdoor air and help reduce building static pressure.

If using a 100% (two fans) power exhaust configuration, a second power exhaust fan will turn on once the economizer damper modulates open past a second pre-determined position. Turning on the second fan will allow the unit to further reduce building static pressure.

19.1.3.10. Differential Static Pressure Control

Power exhaust fans (standard or high static) with building differential static pressure transducer control use the actual building static pressure relative to the outdoor atmospheric pressure to activate fan operation. Based on actual building static pressure as determined by the building differential pressure transducer, the unit controller, third party device or unit controller will instruct the power exhaust fan(s) to turn on or off as needed to maintain the building static pressure set point. Turning on the fans decreases building pressure, while stopping fan operation increases building pressure. Power exhaust confirmations with two fans have two stage capability for improved building static pressure performance and enhanced control. The building pressure set point resides in the unit controller.

19.1.3.11. Building Pressure Control for High Static Power Exhaust Fans with Variable Frequency Drives

Energence units can control building static pressure with a high static power exhaust fan featuring a variable frequency drive, using building differential static pressure control. This system provides precise and powerful control of building static pressure. This system uses actual building static pressure relative to the outdoor atmospheric pressure and a variable frequency drive to activate fan operation and modulate fan speed. It is important to note that the unit controller connects directly to and controls the variable frequency drive and that the building static pressure set point resides in the unit controller.

Based on the actual building static pressure (as determined by the building pressure transducer) the unit controller instructs the power exhaust fan(s) to increase or decrease speed as needed to maintain the building static pressure set point. Increasing fan speed decreases building pressure while decreasing fan speed increases building pressure. Power exhaust configurations with two fans (100% capacity) have the ability to remove more exhaust air than single fan configurations.

19.1.4. Constant Air Volume (CAV) Units in Single Zone Applications with a Lennox Zone Sensor (4 Heat / 4 Cool)

19.1.4.1. Unit Controller Operation

When using a Lennox zone sensor with the unit controller operating in zone sensor mode, a packaged rooftop unit can provide up to four stages each of mechanical heating and cooling operation. The zone sensor provides space temperature information to the unit controller. The unit controller houses all space temperature set points and controls all rooftop unit staging and general operation functions. The unit controller also determines unit error codes, provides diagnostic information and maintains safe operation limits.

19.1.4.2. Ventilation Demand

When the unit controller is in zone sensor control mode, the user has several different ventilation sequence of operation scenarios to choose from. The default mode causes the unit controller to activate the supply fan when both a ventilation and either heating or cooling demand are present. This occurs independent of receiving an occupied demand. The user can change the default setting to allow the supply fan to run continuously when the unit controller receives both a ventilation and occupied demand. This is independent of a call for either heating or cooling. When the unit controller receives a ventilation demand and occupied demand is not present, the unit controller will only activate the supply fan when it receives either a heating or cooling demand.

19.1.4.3. Cooling Demand

The unit controller directly monitors space temperature through the zone sensor. Based on this information, the unit controller activates the different compressor stages to maintain the desired occupied space temperature set point. Increasing compressor stages provides more cooling capacity while decreasing compressor stages provides less cooling capacity. The unit controller has direct control over the rooftop unit mechanical cooling staging operation. The user has the option to configure the unit controller so that if the zone sensor fails, the unit controller can use a backup operation to control unit operation.

Energence units feature four separate compressors and refrigeration circuits that can provide up to four stages of mechanical cooling operation. For stage one operation, the unit controller activates the first compressor (25% of total unit capacity). For stage two operation, the unit controller activates the second compressor (50% unit capacity). For stage three operation, the unit controller activates the third compressor (75% total unit capacity). For stage four operation, the unit controller activates the fourth compressor (100% unit capacity). Depending on the zone sensor configuration setting, occupants in the space can change the set point. The unit controller automatically recognizes this change and instructs the unit to respond accordingly.

19.1.4.4. Cooling Demand with Economizer

If the outdoor air is suitable for free cooling and the unit has an economizer, the unit controller will open the economizer and use fresh air for stage one cooling. For stage two cooling operation, the unit controller activates the first compressor. For stage three cooling operation, the unit controller activates the second compressor. For stage four cooling operation, the unit controller activates the remaining compressors (number three and four). The unit controller has direct control over the rooftop unit mechanical cooling staging and economizer operation.

19.1.4.5. Heating Demand (General Operation)

The unit controller directly monitors space temperature through the zone sensor. Based on this information, the unit controller turns on or off the heating stages to maintain the desired temperature set point. Increasing heating stages provides additional heating capacity while decreasing heating stages provides less heating capacity. The unit controller has direct control over rooftop unit mechanical heating staging operation. Energence units feature four separate heating stages that can provide up to four stages of mechanical heating operation. The specific heating capacity varies for each stage depending on the heat source. Depending on the zone sensor configuration setting, occupants in the space can change the set point. The unit controller automatically recognizes this change and instructs the unit to respond accordingly.

19.1.4.6. Heating Demand (Electric)

Energence units feature multiple electric heat sections available in sizes from 30 kW to 180 kW (depending on unit size and voltage). Units can provide up to four stages of mechanical heating depending on the size of the electric heater. Staged operation occurs similar to cooling operation, with the unit controller activating or deactivating sections of the electric heater as the demand for heat increases or decreases.

19.1.4.7. Humiditrol Dehumidification Operation - Dehumidification Demand

Upon a dehumidification only demand, the unit controller activates compressors number one and two. At the same time, the unit controller uses solenoid valves to divert hot gas from compressors one and two to the first reheat coil. The cooled and dehumidifed air from the evaporator is then reheated as it passes through the reheat coil. The de-superheated and partially condensed refrigerant continues to the outdoor condenser coil where condensing is completed.

The reheat coil is sized to offset most of the first and second stages of sensible cooling effect during reheat only operation. This reduction in sensible cooling capacity extends compressor run time to control humidity when cooling loads are light. The unit continues to operate in this mode until the dehumidification demand is satisfied. A heating demand terminates reheat operation.

The unit controller relative humidity set point is set at the factory for 60% and can be adjusted at the unit controller or with the L Connection Network Unit Controller Software. For Network Control Panel (NCP) applications, the humidity set point can be adjusted at the NCP. The unit controller also has an option for an external digital input for the dehumidification demand. This demand must be provided from an external third party unit controller.

19.1.4.8. Humiditrol Dehumidification Operation - Cooling Demand Only

The unit will operate conventionally whenever there is a demand for cooling and no dehumidification demand. The unit can provide up to four stages of mechanical cooling in this scenario. Free cooling is only permitted when an economizer is present, there is no demand for dehumidification and the outdoor air is suitable for this function.

19.1.4.9. Humiditrol Dehumidification Operation - Cooling and Dehumidification Demand

Stage one cooling demand with dehumidification demand: If both a dehumidification demand and a first stage cooling demand occur, the system activates the first three compressors plus reheat. This provides approximately 75% humidity removal capacity plus 25% cooling capacity.

Stage two cooling demand with dehumidification demand: A demand for second stage cooling plus dehumidification activates all four compressors plus reheat. This provides 100% humidity removal capacity plus approximately 50% cooling capacity.

Stage three cooling demand with dehumidification demand: A demand for stage three cooling plus dehumidification activates all three compressors. The fourth compressor and reheat coil will cease operation. This provides approximately 75% of humidity removal capacity and 75% cooling capacity.

Stage four cooling demand with dehumidification demand: A demand for stage four cooling plus dehumidification activates all four compressors. This will provide 100% humidity removal capacity and 100% cooling capacity.

19.1.5. Constant Air Volume (CAV) Units in Single Zone Applications with a Thermostat or Third Party Unit Controller (2 Heat / 2 Cool)

19.1.5.1. Unit Controller Operation

When using a two-stage heat/ cool thermostat or third party unit controller with the unit controller in the thermostat mode, a packaged rooftop unit can provide up to two stages of mechanical heating and cooling operation. To operate correctly, a thermostat or third party unit controller must provide the following wiring connections to the unit controller:

- 1. Ventilation demand
- 2. Occupied demand
- 3. Heating demand one
- 4. Heating demand two
- 5. Cooling demand one
- 6. Cooling demand two

In this set up, either the thermostat or third party unit controller controls the rooftop unit staging and general operation. The unit controller functions primarily to determine unit error codes, provide diagnostic information and maintain safe operation limits.

19.1.5.2. Ventilation Demand

Upon receiving a ventilation demand from the thermostat or third party unit controller, the unit controller instructs the supply fan to start operation. The supply fan runs at full capacity as long as a ventilation demand is present.

19.1.5.3. Cooling Demand

Upon receiving a stage one demand for cooling from the thermostat or third party unit controller, the unit controller activates the first two compressors, providing 50% cooling capacity.

If the unit is unable to satisfy the call for cooling within a specified time period and receives a stage two cooling demand from the thermostat or third party unit controller, the unit controller activates the third and fourth compressors, providing 100% cooling capacity. The thermostat or third party unit controller has direct control over the rooftop unit's staging capability.

19.1.5.4. Cooling Demand With Economizer

If the unit features an economizer and outdoor air is suitable for free cooling, a call for stage one cooling will activate the economizer. The unit will try to satisfy the cooling demand using outdoor air rather than mechanical cooling.

If the unit is unable to satisfy the call for cooling within a specified time period using the economizer and receives a stage two call for cooling from the thermostat or third party unit controller, the unit controller activates all four compressors. This will provide 100% cooling capacity. It is important to note that the thermostat or third party unit controller has direct control over the rooftop unit's staging capability. While the unit controller typically has direct control over the economizer, it is possible for a thermostat or third party unit controller to directly control this functionality.

19.1.5.5. Heating Demand (General Operation)

Upon receiving a stage one heating demand from the thermostat or third party unit controller, the unit controller activates the unit's heating section to start operation. This activates the first two stages of mechanical heat, providing approximately 66% heating capacity.

If the unit is unable to satisfy the call for heating within a specified time period and receives a stage two heating demand from the thermostat or third party controller, the unit controller activates the third and fourth stages of heat, providing 100% heating capacity. It is important to note that the thermostat or third party unit controller has direct control over the rooftop unit's staging capability.

19.1.5.6. Heating Demand (Electric)

Units feature multiple electric heat sections available in sizes from 30 kW to 180 kW (depending on unit size and voltage). Units can provide up to two stages of mechanical heating depending on the size of the electric heater. Staged operation occurs similar to cooling operation, with the thermostat or third party unit controller activating or deactivating sections of the electric heater as the demand for heat increases or decreases.

19.1.5.7. Humiditrol Dehumidification Operation - Dehumidification Demand

Upon a dehumidification demand, the unit controller activates compressor number one and two. At the same time, the unit controller uses solenoid values to divert hot gas from compressor one and two to the first reheat coil. The cooled and dehumidifed air from the evaporator is then reheated as it passes through the reheat coil. The de-superheated and partially condensed refrigerant continues to the outdoor condenser coil where condensing is completed. The reheat coil is sized to offset most of the first and second stages of sensible cooling effect during reheat only operation. This reduction in sensible cooling capacity extends compressor run time to control humidity when cooling loads are light.

The unit will continue to operate in this mode until the dehumidification demand is satisfied. A heating demand will terminate reheat operation.

The unit controller relative humidity set point is factory configured for 60% and can be adjusted at the unit controller or with the L Connection Network Unit Controller software. For Network Control Panel (NCP) applications, the humidity set point can be adjusted at the NCP. The unit controller also has an option for an external digital input to signal the dehumidification demand. This demand must be provided from an external third party DDC.

19.1.5.8. Humiditrol Dehumidification Operation - Cooling Demand Only

The unit operates conventionally whenever there is a demand for cooling and no dehumidification demand. The unit can provide up to two stages of mechanical cooling in this scenario. Free cooling is only permitted when an economizer is present, there is no demand for dehumidification and outdoor air is suitable for this function.

19.1.5.9. Humiditrol Dehumidification Operation - Cooling and Dehumidification Demand

Stage one cooling demand with dehumidification demand: If both a dehumidification demand and a first stage cooling demand occur, the system activates all four compressors plus the first stage of reheat. This provides 100% humidity removal capacity with approximately 50% cooling capacity.

Stage two cooling demand with dehumidification demand: A demand for second stage cooling activates all four compressors plus terminates any reheat operation. This provides 100% humidity removal capability and 100% cooling capacity. The unit controller activates all compressors until the cooling demand is satisfied

19.1.6. Constant Air Volume (CAV) Units in Single Zone Applications with a Thermostat or Third Party Unit Controller and the Unit Operating in Discharge Air Temperature Control (4 Heat / 4 Cool)

19.1.6.1. Unit Controller Operation

When using a thermostat or third party unit controller with the unit controller operating in the thermostat mode configured for discharge air temperature control, a packaged rooftop unit can provide up to four stages of mechanical heating and cooling operation.

To operate correctly, a thermostat or third party controller must provide the following wiring connections to the unit controller:

- 1. Ventilation demand
- 2. Occupied demand
- 3. Heating demand
- 4. Cooling demand

In this configuration the unit controller will control the rooftop staging and general operation. The thermostat or third party unit controller only informs the unit controller if there is a specific demand. For example, if the thermostat or third party unit controller passes along a demand for cooling, the controller increases or decreases cooling stages to maintain the discharge supply air temperature set point. Along with providing control of the rooftop unit, the unit controller also provides error codes, diagnostic information and maintains safe operating limits.

19.1.6.2. Ventilation Demand

Upon receiving a ventilation demand from the thermostat or unit controller, the unit controller activates the supply fan. The supply fan operates at 100% capacity until the ventilation demand has been removed.

19.1.6.3. Cooling Demand

Upon receiving a cooling demand from the the thermostat or unit controller, the unit controller instructs the unit to maintain a cooling discharge air temperature set point. The unit controller has direct control over the rooftop unit staging. The discharge supply air temperature set point resides in the unit controller, has a factory default setting, and can be adjusted at start-up. The user can adjust the set point either locally or remotely with Lennox' L Connection Network Unit Controller software or at the unit controller board. The user can not adjust the set point through a a third party control device or software program.

The unit controller receives discharge supply air temperature information directly from the temperature sensor, located in the supply duct system. Based on this information, the unit controller activates the different compressor stages to maintain the discharge supply air temperature set point (55°F default). Increasing compressor stages provides more cooling capacity while decreasing compressor stages provides less cooling capacity.

Energence units feature four separate compressors and refrigeration circuits that can provide up to four stages of mechanical cooling operation.

- For stage one operation, the unit controller activates the first compressor (25% of total unit capacity).
- For stage two operation, the unit controller activates the second compressor (50% unit capacity).
- For stage three operation, the unit controller activates the third compressor (75% total unit capacity).
- For stage four operation, the unit controller activates the fourth compressor (100% unit capacity).

19.1.6.4. Cooling Demand With Economizer

If outdoor air is suitable for free cooling and the unit has an economizer, the unit controller opens the economizer and uses fresh air for stage one cooling.

• For stage two operation, the unit controller activates one compressor.

- For stage three operation, the unit controller activates a second compressor.
- For stage four operation, the unit controller activates the remaining compressors (number three and four).

The unit controller has direct control over the rooftop unit staging and economizer operation.

19.1.6.5. Heating Demand (General Operation)

Upon receiving a heating demand from a thermostat or a third party controller, the unit controller instructs the unit to maintain a heating discharge air temperature set point. The unit controller has direct control over the rooftop unit heating staging operation. The unit controller receives discharge supply air temperature information directly from the temperature sensor located in the supply duct. Based on this information, the unit controller activates the different heating stages to maintain the discharge supply air temperature set point (110°F default). Turning on additional heating stages increases the heating capacity, while turning off heating stages decreases the heating capacity. The heating discharge air temperature set point resides in the unit controller, has a factory default setting, and may be adjusted at start up. The user can adjust the set point either locally or remotely with Lennox' L Connection Network Unit Controller software or at the unit controller board. The user can not adjust the set point through a third party control device or software program.

19.1.6.6. Heating Operation (Electric)

Units feature multiple electric heat sections available in sizes from 30 kW to 180 kW (depending on unit size and voltage). Units can provide up to four stages of mechanical heating depending on the size of the electric heater. Staged operation occurs similar to cooling operation, with the unit controller activating or deactivating sections of the electric heater to maintain the discharge air temperature set point.

19.1.7. Constant Air Volume (CAV) Units in Single Zone Applications with a Thermostat or Third Party Unit Controller (2 Heat / 2 Cool)

19.1.7.1. Unit Controller Operation

When using a third-party unit controller and the unit controller is operating in the thermostat mode, a packaged rooftop unit can provide up to two stages of mechanical heating and cooling operation. To operate correctly, a unit controller must provide the following wiring connections to the unit controller:

- 1. Ventilation demand
- 2. Occupied demand
- 3. Heating demand one
- 4. Heating demand two
- 5. Cooling demand one
- 6. Cooling demand two

In this configuration the third party unit controller will control the rooftop unit staging and general operation. The unit controller functions primarily to determine unit error codes, provide diagnostic information and maintain safe operating limits.

19.1.7.2. Unit Sequence Of Operation

Constant air volume units in bypass zoning applications featuring a Lennox or third party unit controller with the unit controller operating in thermostat mode, have the same basic heating and cooling unit sequence of operations as constant air volume units in single zone applications featuring a third party unit controller, with the unit controller operating in thermostat mode. For specific information, refer to the Constant Air Volume in Single Zone Applications with a Thermostat or Third Party Unit Controller section.

The following sequence of operation information is specific to constant air volume units in bypass zoning applications.

19.1.7.3. Supply Duct Bypass Damper

To maintain accurate supply duct static pressure control, constant volume units in bypass zoning applications use a bypass damper between the supply and return air ducts. In this scenario, the supply duct static pressure transducer and damper connect directly to the third party unit controller. Based on actual static pressure relative to set point, the third party unit controller either modulates open or closes the damper. It the damper modulates further closed, the static pressure in the supply air duct increases. If the damper modulates further open, the static pressure in the supply air duct decreases. The unit controller does not have direct control over the bypass damper in this scenario.

19.1.8. Constant Air Volume Units in Bypass (CAVB) Zoning Applications with a Third Party Unit Controller and the Unit Operating in Discharge Air Temperature Control (4 Heat / 4 Cool)

19.1.8.1. Unit Controller Operation

When using a third party unit controller and the unit controller is operating in thermostat mode and configured for discharge air temperature control, a packaged rooftop unit can provide up to four stages of mechanical heating and cooling operation. To operate correctly, a third party unit controller must provide the following wiring connections to the unit controller:

- 1. Ventilation demand
- 2. Occupied demand

- 3. Heating demand
- 4. Cooling demand

In this configuration, the unit controller controls the rooftop staging and general operation. The third party unit controller only informs the unit controller controller as to whether or not there is a specific demand. For example, if the third party unit controller passes along a demand for cooling, then the unit controller increases or decreases cooling stages to maintain the discharge supply air temperature set point. Along with controlling the rooftop unit, the unit controller also determines error codes, provides diagnostic information and maintains safe operating limits.

19.1.8.2. Unit Sequence of Operation

Constant air volume units in bypass zoning applications featuring a third party unit controller with the unit controller operating in thermostat mode, configured for discharge air temperature control have the same basic heating and cooling unit sequence of operations as constant air volume units in single zone applications featuring a third party unit controller, with the unit controller operating in thermostat mode with discharge air temperature control.

For specific unit sequence of operation information refer to the Constant Air Volume Units in Single Zone Applications with a Thermostat or Third Party Unit Controller and the Unit Operating in Discharge Air Temperature Control section.

The following sequence of operation information is specific to constant air volume units in bypass zoning applications.

19.1.8.3. Supply Duct Bypass Damper

To maintain accurate supply duct static pressure control, constant volume units in bypass zoning applications typically feature a bypass damper between the supply and return air ducts. In this scenario, the supply duct static pressure transducer and damper connect directly to the third party unit controller. Based on actual static pressure relative to set point, the unit controller either modulates open or modulates closed the bypass damper.

If the damper modulates further closed, the static pressure in the supply air duct increases. If the damper modulates further open, the static pressure in the supply air duct decreases. The unit controller does not have any direct control over the bypass damper in this scenario.

19.1.9. Variable Air Volume (VAV) Units in Zoning Applications with a Third Party Unit Controller and the Unit Operating in Discharge Air Temperature Control (4 Heat / 4 Cool)

19.1.9.1. Unit Controller Operation

When using a third party unit controller with the unit controller operating in thermostat mode configured for discharge air temperature control, a packaged rooftop unit can provide up to four stages of mechanical heating and cooling operation. To operate correctly, a third party unit controller must provide the following wiring connections to the unit controller:

- 1. Ventilation demand
- 2. Occupied demand
- 3. Heating demand
- 4. Cooling demand

In this configuration, the unit controller controls the rooftop unit staging and general operation. The third party unit controller only informs the unit controller as to whether or not there is a specific demand. For example, if the unit controller passes along a demand for cooling, then the unit controller increases or decreases cooling stages to maintain the discharge supply air temperature set point. In this mode, the unit controller also maintains the supply duct static pressure by directly controlling the supply fan variable frequency drive. Along with providing control of the rooftop unit, the unit controller determines error codes, supplies diagnostic information and maintains safe operating limits.

19.1.9.2. Ventilation Demand

Upon receiving a ventilation demand from the unit controller, the unit controller instructs the supply fan variable frequency drive to start the supply fan and maintain a constant supply duct static pressure set point. The unit controller has direct control over the variable frequency drive and supply fan.

The unit controller receives supply duct static pressure information directly from a supply duct static pressure sensor located approximately three quarters down the length of the longest main supply duct. Based on information from the supply duct static pressure transducer relative to set point, the unit controller instructs the variable frequency drive to either increase or decrease the speed of the supply fan. Speeding up the supply fan will increase the supply duct static pressure while slowing down the supply fan speed will decrease the supply duct static pressure. For increased flexibility, the unit controller has separate, adjustable static pressure set points for ventilation, cooling, heating and smoke alarms. These set points reside in the unit controller memory, have factory default settings and may be adjusted in the field prior to start-up.

19.1.9.3. Cooling Demand

Upon receiving a cooling demand from the unit controller, the unit controller instructs the unit to maintain a cooling discharge air temperature set point. The unit controller has direct control over the rooftop unit staging. The unit controller receives discharge supply air temperature information directly from the supply duct temperature sensor located in the supply duct system. Based on this information, the unit controller turns on or off the different compressor stages to maintain the discharge supply air temperature set point (55°F default). Increasing compressor stages provides more cooling capacity while decreasing compressor stages provides less cooling capacity.

Energence units feature four separate compressor and refrigeration circuits that can provide up to four stages of mechanical cooling operation.

- For stage one operation, the unit controller activates the first compressor (25% of total unit capacity).
- For stage two operation, the unit controller activates the second compressor (50% unit capacity).
- For stage three operation, the unit controller activates the third compressor (75% total unit capacity).
- For stage four operation, the unit controller activates the fourth compressor (100% unit capacity).

The discharge supply air temperature set point resides in the unit controller, has a factory default setting, and can be adjusted at start-up. The user can adjust the set point either locally or remotely with the L Connection Network Unit Controller software or at the unit controller board. The user cannot adjust the set point through a third party control device or software program.

19.1.9.4. Cooling Demand With Economizer

If outdoor air is suitable for free cooling and the unit has an economizer, the unit controller opens the economizer and uses fresh air for stage one cooling.

- For stage two operation, the unit controller activates one compressor.
- For stage three operation, the unit controller activates a second compressor.
- For stage four operation, the unit controller activates the remaining compressors (number three and four).

The unit controller has direct control over the rooftop unit staging and economizer operation.

19.1.9.5. Heating demand (general operation)

Upon receiving a heating demand from the third party unit controller, the unit controller instructs the unit to maintain a heating discharge air temperature set point. The unit controller has direct control over the rooftop unit heating staging operation. The unit controller receives discharge supply air temperature information directly from the supply duct temperature sensor located in the supply duct system. Based on this information, the unit controller turns on or off mechanical heating stages to maintain the discharge supply air temperature set point (110°F default). Adding heat stages increases heat capacity while removing heat stages decreases heat capacity.

The heating discharge air temperature set point resides in the unit controller, has a factory default setting, and may be adjusted at start up. The user can adjust the set point either locally or remotely with the L Connection Network Unit Controller software. The user cannot adjust the set point through a third party control device or software program.

19.1.9.6. Heating Operation (Electric)

Energence units feature multiple electric heat sections available in sizes from 30 kW to 180 kW (depending on unit size and voltage). Units can provide up to four stages of mechanical heating depending on the size of the electric heater. Staged operation occurs similar to cooling operation, with the unit controller activating or deactivating sections of the electric heater to maintain the discharge air temperature set point.

19.1.9.7. Morning Warm Up

Energence units have an intelligent and innovative morning warm up control scheme. As the VAV system shifts from unoccupied to occupied, the unit controller automatically keeps the economizer shut for 60 minutes (default) or until the first cooling demand. On cold days this prevents unconditioned fresh outdoor air from entering the building and helps to reduce energy usage. Because most VAV systems perform morning warm up before occupants enter the building, the absence of fresh outdoor air typically does not cause any problems.

Upon the first call for heating in this scenario, the unit controller instructs the unit to turn on the heating section and start supply fan operation. Because the unit controller controls the heat staging and supply fan operation based on actual discharge supply air temperature control and supply duct static pressure, the rooftop unit automatically selects the proper staging and supply fan speed to ensure optimal performance.

Typically in this scenario all zones are below the desired room temperature set point so the VAV boxes will be fully open. This causes the supply duct static pressure to be low so the unit controller speeds up the fan to maintain the supply duct static pressure set point. As the supply fan speeds up and increases the total supply air volume, the heating section turns on additional stages to maintain the correct discharge supply air temperature set point. In the event the unit controller receives a call for cooling from the third party unit controller, the unit controller switches to cooling mode and opens the economizer. This intelligent control scheme helps prevent potential problems caused by stuck VAV box dampers and supply duct static over pressurization.

19.1.9.8. Outdoor Air CFM Control

The Outdoor Air CFM Control option allows variable air volume units to minimize the effect of supply fan speed changes and maintain a constant outdoor air CFM level. A sensor located in the outdoor air section of the unit measures the outdoor air velocity and relays the information to the unit controller. Based on the velocity information, the unit controller automatically adjusts the economizer position, offsetting the supply fan speed changes and maintaining a constant outdoor air CFM level.

20. M2 Unit Controller Inputs and Outputs

When necessary, individual inputs and outputs may be read at the M2 board connectors. M2 boards are shown on wiring diagrams as dashed boxes (see shaded areas in figure 40). Parts of the M2 boards will be located in all wiring diagram sections (see Page 103 for connector information and description and type of input or output).

Example: To Determine If 24 Volts Is Being Supplied To The K3 Blower Contactor:

- 1. Using the unit wiring diagram, locate K3 and identify appropriate M2 board and jack/plug. (A55 Main Board and P265-4.)
- 2. Find the I&O table for P265-4 ; it shows a 24 volt output to the blower.

		DESCRIPTION
S42 USED ON "M" VOLTAGE UNITS	KEY	COMPONENT
AND UNITS WITH HIGH EFFICIENCY	A30	SENSOR, PRESSURE DISCHARGE AIR
MOTORS	A34	SENSOR, PRESSURE RETURN AIR
	A55	PANEL, MAIN PANEL LENNOX
ONLY ON UNITS WITH HUMIDITROL	A59	PANEL, COMPRESSORS 3 AND 4
OPTION	A96	CONTROL, INVERTER SUPPLY
EXTERNAL HUMIDITROL CONTACTS	A133	PANEL, GP BOARD LENNOX
EXTERINAL HOMIDITROL CONTACTS	A137	CONTROL, INVERTER RETURN
CONNECTS TO SECTION "A" HEAT-	B1	COMPRESSOR 1
ING DIAGRAM. MAY BE LOCATED IN	B2	COMPRESSOR 2
HEATING COMPARTMENT	B3	MOTOR, BLOWER
	B4	MOTOR, OUTDOOR FAN 1
S49 AND S50 ARE PART OF 5VDC CIR- CUIT	B5	MOTOR, OUTDOOR FAN 2
COIL	B13	COMPRESSOR 3
F37 AND F38 ARE NOT USED ON	B20	COMPRESSOR 4
UNITS LESS ELECTRIC HEAT, 480	B21	MOTOR, OUTDOOR FAN 3
AND 600V	B22	MOTOR, OUTDOOR FAN 4
	B23	MOTOR, OUTDOOR FAN 5
F37 AND S39 PRESSURE SWITCH	B24	MOTOR, OUTDOOR FAN 6
CONTROL	B35	MOTOR, EXHAUST BLOWER 1
VOLTAGE CONTROL SINGLE STAGE	B36	MOTOR, EXHAUST BLOWER 2
VOLIAGE CONTROL SINGLE STAGE	CB8	CIRCUIT, BREAKER T1
VOLTAGE CONTROL TWO STAGE	CB10	CIRCUIT BREAKER, MAIN DISCONNECT UNIT
	CB18	CIRCUIT, BREAKER T18
REMOVE JUMPER BETWEEN	F10	FUSE, OUTDOOR FAN MOTOR
TB24-28 AND TB24-29 WHENEVER	F30	FUSE, TRANSFORMER T29 PRIMARY
ALC CONTROL IS USED. REFER TO SECTION C DIAGRAM	F31	FUSE, TRANSFORMER T29 SECONDARY
SECTION C DIAGRAM	F37	FUSE, COMPRESSOR GROUP 1
A30 SENSOR AND A96 INVERTER	F38	FUSE, COMPRESSOR GROUP 2
CONTROL FOR B3 SUPPLY AIR	HR1	HEATER COMPRESSOR 1
BLOWER	HR2	HEATER COMPRESSOR 2
	HR5	HEATER COMPRESSOR 3
A34 SENSOR AND A137 INVERTER	HR11	HEATER COMPRESSOR 4
CONTROL FOR B35 AND B36 EX- HAUST AIR BLOWERS	J11	JACK, GFI, RECEPTACLE
	J86	JACK, OUTDOOR FAN INTERFACE
A30 MAY BE USED WITH OR WITHOUT	J87	JACK, OUTDOOR FAN INTERFACE 2
A34	J118	JACK, COMPRESSOR 3 AND 4, CONTROL
A34 MAY BE USED WITH OR WITHOUT	J119	JACK, COMPRESSOR 3 AND 4, INPUT
	J132	JACK, BLOWER , EXHAUST FAN MOTOR 1
A34 MAY BE USED WITH OR WITHOUT	J133	JACK, BLOWER , EXHAUST FAN MOTOR 2
B9 BYPASS DAMPER A34 MAY BE USED WITH EITHER A96	J138	JACK, EXHAUST FAN 2
VFD OR B9 BYPASS DAMPER	J139	JACK, EXHAUST FAN 3
	J194	JACK, I/O FOR A133 LENNOX A133 BOARD
MITSUBISHI VFD	J211	JACK, INVERTER EXHAUST BLOWER
	J248	JACK, VFD CONTROL
K202-1 CONTACTOR MAY BE OMIT-	J258	JACK, VFD CONTROL EXHAUS AIR
TED ON UNITS WITH VFD OPERATION	J263	JACK, HIGH AND LOW PRESSURE SWITCHES
ONLY	J264	JACK, BLOWER DECK
USED ON VFD APPLICATIONS	J265	JACK, CONTACTORS AND RELAYS
	J267	JACK, OUTDOOR FAN AREA
IF ANY WIRE IN THIS APPLIANCE IS	J268	JACK, TRANSFORMER 1 POWER
CED, IT MUST BE REPLACED WITH	J269	JACK, HUMIDITROL
OF LIKE SIZE, RATING, TERMINATION	J299	JACK, HUMIDITROL INTERFACE
ISULATION THICKNESS. I NG - ELECTRIC SHOCK HAZARD!	K1,-1	CONTACTOR, COMPRESSOR 1
AUSE INJURY OR DEATH.	K2,-1	CONTACTOR, COMPRESSOR 2
IUST BE GROUNDED IN	K3, -1	CONTACTOR, BLOWER
RDANCE WITH NATIONAL AND LOCAL S.	<u> </u>	

K10,-1,2	RELAY, OUTDOOR FAN 1
K14,-1	CONTACTOR, COMPRESSOR 3
K68,-1	RELAY, OUTDOOR FAN 2
K146,1	CONTACTOR, COMPRESSOR 4
K149,-1	RELAY, OUTDOOR FAN 3
K150,-1	RELAY, OUTDOOR FAN 4
K152,-1	RELAY, OUTDOOR FAN 5
	RELAY, OUTDOOR FAN 6
K199,-1	CONTACTOR, EXHAUST BLOWER 1
K201,-1	CONTACTOR, EXHAUST BLOWER 2
K202, -1	CONTACTOR, INVERTER BLOWER
K203, -2	RELAY, SUPPLY BLOWER AUX
K207, -2	RELAY, EXHAUST BLOWER AUX
L14	VALVE, SOLENOID REHEAT COIL 1
L30	VALVE, SOLENOID REHEAT COIL 2
	PLUG, OUTDOOR FAN INTERFACE
P86	PLUG, OUTDOOR FAN INTERFACE 2
P87	
P118	PLUG, COMPRESSOR 3 AND 4, CONTROL
P119	PLUG, COMPRESSOR 3 AND 4, INPUT
P194	PLUG, I/O FOR A133 LENNOX A133 BOARD
P211	PLUG, INVERTER EXHAUST BLOWER
P248	PLUG, VFD CONTROL
P258	PLUG, VFD CONTROL EXHAUS AIR
P263	PLUG, HIGH AND LOW PRESSURE SWITCHES
P264	PLUG, BLOWER DECK
P265	PLUG, CONTACTORS AND RELAYS
P267	PLUG,OUTDOOR FAN AREA
P268	PLUG, TRANFORMERS
P269	PLUG, HUMIDITROL
P299	PLUG, SAFETY
RT17	SENSOR, OUTDOOR AIR
S4	SWITCH, LIMIT HI PRESS COMPRESS 1
S7	SWITCH, LIMIT HI PRESS COMPRESS 2
S11	SWITCH, LOW PRESS, LOW AMBIENT KIT COMP 1
S28	SWITCH, LIMIT HI PRESS COMPRESS 3
S37	SWITCH, PRESSURE EXHAUST FAN
S39	SWITCH, EXHAUST FAN
S42	SWITCH, OVERLOAD RELAY BLOWER MOTOR
S48	SWITCH, DISCONNECT
S49	SWITCH, FREEZE STAT COMPRESS 1
S50	SWITCH, FREEZE STAT COMPRESS 2
S53	SWITCH, FREEZE STAT COMPRESS 3
	SWITCH, LOW PRESS, LOW AMBIENT KIT COMP 2
S84	SWITCH, LOW PRESS, LOW AMBIENT KIT COMP 2 SWITCH, LOW PRESS, LOW AMBIENT KIT COMP 3
S85	SWITCH, LOW PRESS, LOW AMBIENT KIT COMP 3 SWITCH, LOW PRESS, COMP 1
S87	
S88	SWITCH, LOW PRESS, COMP 2
S94	SWITCH, LOW PRESS, LOW AMBIENT KIT COMP 4
S95	SWITCH, FREEZE STAT COMPRESS 4
S96	SWITCH, LIMIT HI PRESS COMPRESS 4
S97	SWITCH, LOW PRESS, COMP 4
S98	SWITCH, LOW PRESS, COMP 3
S117	SWITCH, GFI
T1	TRANSFORMER, CONTROL
T18	TRANSFORMER, CONTACTOR
T29	TRANSFORMER, GFI
TB13	TERMINAL STRIP, POWER DISTRIBUTION
TB18	TERMINAL STRIP, CYCLE CONTROL
TDOO	TERMINAL STRIP, BLOWER SPEED
TB23	
TB23 TB24	TERMINAL STRIP, UNIT ADDER
	TERMINAL STRIP, UNIT ADDER TERMINAL STRIP, COMPRESSOR 1
TB24 TB40	TERMINAL STRIP, COMPRESSOR 1
TB24 TB40 TB41	
TB24 TB40 TB41 TB47	TERMINAL STRIP, COMPRESSOR 1 TERMINAL STRIP, COMPRESSOR 2
TB24 TB40 TB41	TERMINAL STRIP, COMPRESSOR 1 TERMINAL STRIP, COMPRESSOR 2 TERMINAL STRIP, COMPRESSOR 3

Wiring Diagram Key (see figure 40)

	A34 MAY BE USED WITH OR WITHO
	A30 A34 MAY BE USED WITH OR WITHO B9 BYPASS DAMPER
	A34 MAY BE USED WITH EITHER A VFD OR B9 BYPASS DAMPER
4	MITSUBISHI VFD
15	K202-1 CONTACTOR MAY BE ON TED ON UNITS WITH VFD OPERATI ONLY
16	USED ON VFD APPLICATIONS
REPLA	IF ANY WIRE IN THIS APPLIANCE I CED, IT MUST BE REPLACED WITH F LIKE SIZE, RATING, TERMINATIO
	SULATION THICKNESS.
	NG - ELECTRIC SHOCK HAZARD!
	AUSE INJURY OR DEATH.

Δ

⊿

A 4

♨ 囫

A \mathbb{A} ⋒ ⋒

₼


42

13

UNIT M CODES

DISCONNECT ALL POWER BEFORE SERVICING. DENOTES OPTIONAL COMPONENTS


LINE VOLTAGE FIELD INSTALLED

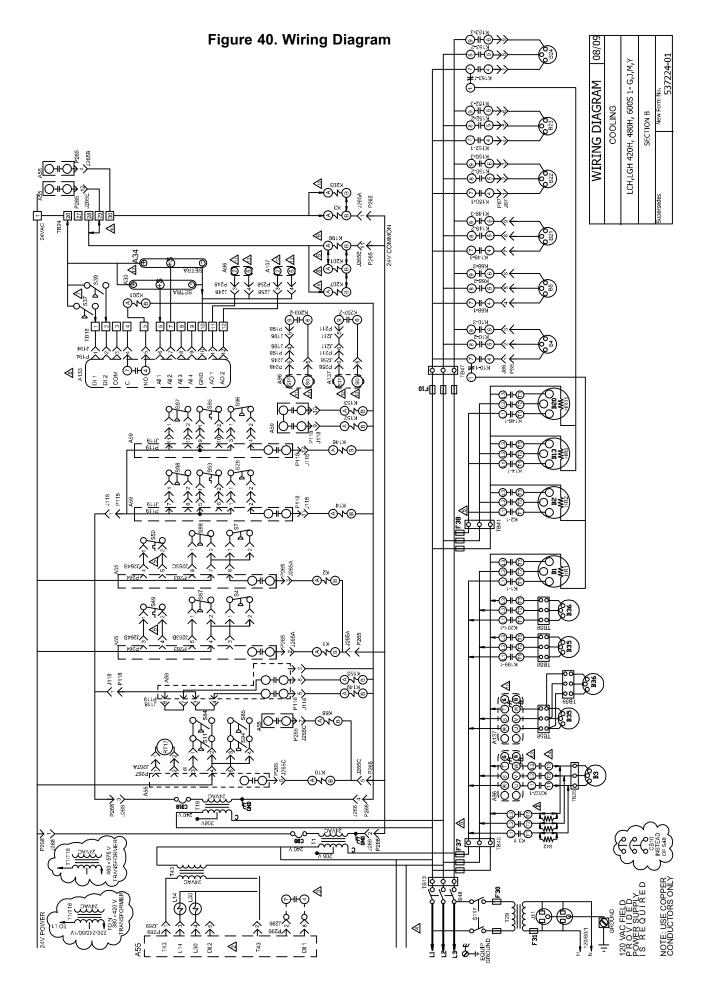

			controller signal	fererenee alagram		
S - BUS - S + 3 MS 9413-0 S - BUS - S +	P297 52 3-401 MS 94 24VA R	3 4 5 6 7 8 9 10 3 4 5 6 7 8 9 10 1 2 3 4 5 1 2 3 4 5 2 2 2 2 13-10-407 MS 9413-10-408 C THERMOSTAT O G W1 W2 Y1 Y2 0 O N		DI1 R C DI2 R DI3 R DI4 P299 1 2 3 4 5 6 7 8 3 2 2 2 MS 9413-10-409 SMOKE INPUTS HU 24VAC DI1 R C DI2 R DI3 R DI4		
Pin #	Label	Description	Туре		Description	Part Number
P297 Thermos	tat				Assembly	MS 9413-10-407
1	R	TRANSFORMER 1 24VAC POWER	24VAC		Header & Label	MS 9413-10-011
2	С	TRANSFORMER 1 24V COMMON	24V COMM		- Header	MSLO 9408-010-576-960-000-00
3	G	BLOWER SIGNAL	24VAC DI		- Label	MZ 9400-10-007
4	W1	1ST STAGE HEATING	24VAC DI		Screw terminal	MF 9306-002-0A-002-G
5	W2	2ND STAGE HEATING	24VAC DI		Screw terminal	MF 9306-006-43-000-G
6	Y1	1ST STAGE COOLING	24VAC DI		Screw terminal	MF 9306-002-49-000-G
7	Y2	2ND STAGE COOLING	24VAC DI			
8	OCP	OCCUPIED SIGNAL	24VAC DI			
9	GLO	GLOBAL CONTROL INPUT	24VAC DI			
10	RSV	RESERVED	NA			
P298 IAQ Inter	face				Assembly	MS 9413-10-408
1	R	TRANSFORMER 1 24VAC POWER	24VAC		Header & Label	MS 9413-10-012
2	С	TRANSFORMER 1 24V COMMON	24V COMM		- Header	MSLO 9408-S10-000
3	IAQ+	INDOOR AIR QUALITY	0-10VDC AI		- Label	MZ 9400-10-008
4	GND	INDOOR AIR QUALITY	0-10VDC AI		Screw terminal	MF 9306-002-60-000-G
5	HUM	RH SENSOR	0-10VDC AI		Screw terminal	MF 9306-002-64-000-G
6	GND	DIGITAL GROUND	GND		Screw terminal	MF 9306-003-4D-000-G
7	TMP	ZONE SENSOR	0-10VDC AI		Screw terminal	MF 9306-003-4L-000-G
8	DO1	SERVICE RELAY OUTPUT	24VAC DO			
9	GND	24 VAC COMMON	24V COMM			
10	DO2	EXHAUST FAN	24VAC DO			
P299 Safety					Assembly	MS 9413-10-409
1	DI1	SMOKE DETECTOR (NO)	24VAC DI		Header & Label	MS 9413-10-013
2	R	TRANSFORMER 1 24VAC POWER	24VAC		- Header	MSLO 9408-010-075-960-000-00
3	С	TRANSFORMER 1 24V COMMON	24V COMM		- Label	MZ 9400-10-009
4	DI2	DIGITAL INPUT 2 FORMER (S42 & S135)	24VAC DI		Screw terminal	MF 9306-003-0H-000-G
5	R	TRANSFORMER 1 24VAC POWER	24VAC		Screw terminal	MF 9306-002-0P-002-G
6	DI3	DIGITAL INPUT 3 FORMER (S149 & A42 FOR A BOX)	24VAC DI		Screw terminal	MF 9306-002-37-001-G
7	R	TRANSFORMER 1 24VAC POWER	24VAC		Screw terminal	MF 9306-003-01-000-G
8	DI4	DIGITAL INPUT 4 FORMER (HUMIDITROL INPUT)	24VAC DI			
9	С	TRANSFORMER 1 24V COMMON	24V COMM			
10	RSV	RESERVED	NA			
			•			

Table 44. M2 unit controller signal reference diagram

Table 45. M2 board connections diagram

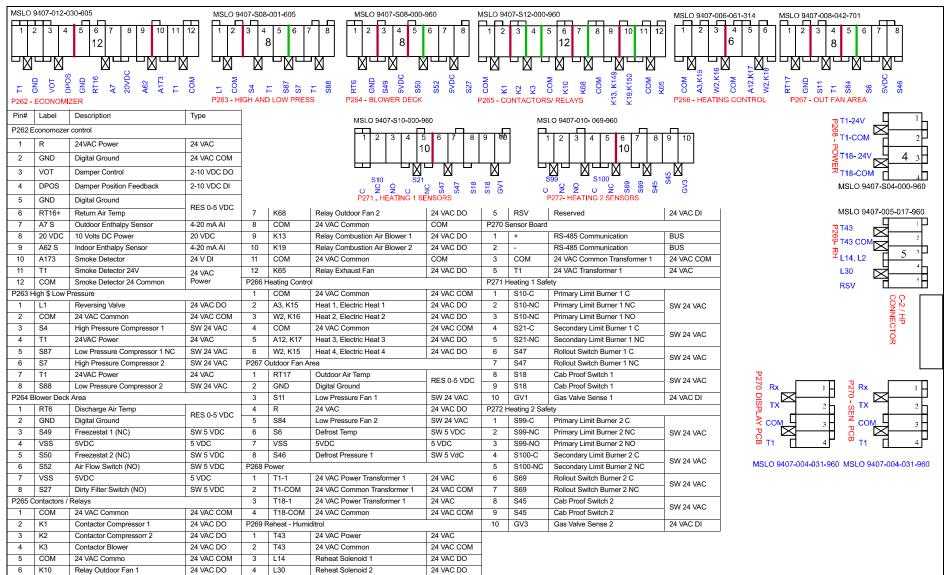

Alphabetical Index

Abbreviations	Page 106
BACnet [™] Module	Page 55
Diagnostics	Page 62
Discharge Air Control	Page 42
Economizer	Page 25
ECTO Electronic Configure To Order Control	Page 66
Inputs and Outputs	Page 100
Load Shedding Options	Page 59
LonTalk [™] Module	Page 54
Low Ambient Fan Cycling	Page 17
Main Controller Operation	Page 7
Modulating Gas Valve (MGV)	Page 58
Networking the Controllers	Page 89
PID Loop Operation	Page 40
Power Exhaust Operation	Page 34
Prodigy M2 Unit Controller Description	Page 6
Reheat Operation	Page 19
Sensors	Page 15
Sequence of Operation	Page 90
Service Relay Operation	Page 60
Supply Air Delivery	Page 36
Third Party Zoning	Page 48
Unit Component Operation	Page 12





	Abbrev	viations	
A55	M2 board. Main RTU control board	IDE	Indoor enthalpy. Depends on temperature and humidity
A133	GP1 Board. General purpose add-on board DIP selects	"W.C.	Inches of water column
	3 functions	LED	Light emitting diode. An indicator light, found either as in-
A169	MCB1 board. A Box motor control board.		dividual elements or grouped together as segments to
AI	Analog input		form characters
AO	Analog output	LP	Low pressure
BL	Blower	LT	Limit
C2	2nd compressor add-on board (A59)	M2	M2 Unit Controller - main controller board (A55). Firm- ware version 7.00.00 or later.
C1	1st stage cooling	MCB1	A Box motor control board (A169).
C2	2nd stage cooling	MGV	Modulating gas valve
C3 C4	3rd stage cooling	MSAV	Multi Stage Air Volume
C4 CAI	4th stage cooling Combustion air inducer	OAC	Outdoor air control
CAVB		OAC	Outdoor air control
COM	Constant air volume with bypass damper Electrical common	OAU	Outdoor air temperature
CL	Cooling	OCP	Thermostat demand, occupied mode
CP1	Compressor 1	ODE	Outdoor enthalpy. Depends on temperature and humid-
CP2	Compressor 2	ODL	ity
CP3	Compressor 2	PID	Proportional, integral and derivative based control loop
CP4	Compressor 4	PPM	Parts per million (mostly used for CO_2 measurements)
CSP	Cooling setpoint	RAP	Return air pressure
DAC	Discharge (supply) air control	RAT	Return air temperature
DACC	Discharge (supply) air control cooling	RH	Relative humidity
DACH	Discharge (supply) air control heating	RS	Reset
DAP	Discharge (supply) air pressure	RTU	Roof top unit
DAT	Discharge (supply) air temperature	RT6	Discharge air temperature sensor
DB	Deadband	RT16	Return air temperature sensor
DCV	Demand controlled ventilation	RT17	Outdoor air temperature sensor
DI	Digital input	SMK	Smoke detection mode (alarm)
Diff	Differential	SP	Setpoint
DIP	DIP switch	Stg	Stage
DO	Digital output	TB	Terminal block
ECTO	Electronic configure to order (control parameters)		Unoccupied
FAC	Fresh air cooling control	W1	Thermostat demand, heat stage 1
FAH	Fresh air heating control	W2	Thermostat demand, heat stage 2
FAT	Fresh air tempering control. See FAC & FAH	W3	Thermostat demand, heat stage 3
FC	Free cooling	W4	Thermostat demand, heat stage 4
G	Thermostat demand, blower	VAC	Alternating current voltage
GLO	Global mode or input (economizer)	VAV	Variable air volume. Accomplished with a variable fre-
GP1	General purpose board GP1-1 (A133)		quency drive (VFD)
H1	1st stage heating	VDC	Direct current voltage
H2	2nd stage heating	VFD	Var. frequency drive. An AC inverter used to vary motor
H3	3rd stage heating	VT	speed Ventilation
H4 up	4th stage heating	Y1	Thermostat demand, cooling stage one
HP HSP	High pressure	Y2	Thermostat demand, cooling stage two
HSP HT	Heating setpoint Heating	Y3	Thermostat demand, cooling stage two
IAQ	Indoor air quality. Often synonymous with CO ₂ level in	Y4	Thermostat demand, cooling stage four
		ZAT	Zone air temperature
	ppm	ZAI	